



Power Sports Batteries

- ATV
- JETSKI
- MOTORCYCLE
- SNOWMOBILE
- LAWN & GARDEN



ETL SEMKO



TS16949

ISO14001

ISO9001

OHSAS18001

广州市虎头实业有限公司
GUANGZHOU TIGER HEAD INDUSTRIAL CO.,LTD.
地址: 广州市海珠区工业大道北132号
Add.: NO.132, North Gongye Road, Haizhu District, China
Tel: 020-85556969
Fax: 020-85539959
Website: <http://www.gztigerhead.com>

COMPANY INTRODUCTION

Guangzhou Tiger Head Industrial Co., Ltd is the backbone enterprise of Tiger Head Group, with a long history traced back to 1928.

As a large government-owned company, Tiger Head Industrial focuses on diversified development and makes huge investment in R&D, purchasing, producing and marketing. Now we deal with various products including lead acid storage batteries, solar products, lighting products, polymer li-lion batteries, jump starters, battery electric appliances, battery raw material, tomato paste, baby diapers, etc.

We pay much attention to quality. All products are under strict quality control in every process from raw material purchasing to final product testing. With high quality and good service, we win our customers' faith and our products sell well in the world, especially in Africa, Middle East, Asia, South America, Europe, etc.

Tiger Head Industrial and its parent company Tiger Head Battery Group share some famous brands, such as "Tiger Head", "555", "TIHAD", "Lighting", "funmily", "Wivin", etc.

Tiger Head Industrial devotes to strengthening our brands and continuing to develop excellent products. We optimize allocation of resources globally and build core competitiveness, striving to realize a win-win business with our partners.

Look forward to the future, with your trust and support, Tiger Head Industrial continues to develop excellent products and offering the best service. Let's work together, embrace a flourishing future!



DESIGNATION OF BATTERY TYPE NUMBERS

Examples:

Conventional Flooded Battery Part Number									
	6	N	4		—	2	A	—	5
	12	N	9		—	4	B	—	1
	12	N	12	A	—	4	A	—	1
	a	b	c	d		e	f		g

High Performance Flooded Battery Part Number									
	L	50	—	N	18	L	—	A	2
S	LB	14				L	—	B	2
	LB	16	A			L	—	A	2
n	h	j	d	b	i	e		f	g

Dry Charged VRLA (AGM) Maintenance Free Battery Part Number									
	LT	X	7			L	—	B	S
	LT	X	20		H	L	—	B	S
	LT	X	14	A	H	L	—	B	S
	k	m	i	d	m	e		g	l

Factory Activated VRLA (AGM) Maintenance Free Battery Part Number									
	LT		14	A	—	3			
	LT	Z	10			4			
	EB	Z	12		—	4			
	k	m	i	d		e			

Designations:	Polarity Location (Figure. 1)
a - nominal voltage	
b - vented type (normal type)	
c - battery capacity at 10 hour rate	
d - indication of different size of the same capacity batteries	
e - polarity location (see Fig. 1), configuration	
f - location of opening for exhaust (see Fig. 2)	
g - type of terminal	
h - symbol of High Performance Flooded batteries	
i - performance level	
j - cranking or starting power	
k - symbol of Leoch maintenance free (VRLA) batteries (LT, EB)	
l - sealed, non-spillable	
m - high performance	
n - with sensor	

Metric Conversion Chart		
1 inch = 25.4 millimeters	1 pound = .45 kilograms	1 liter = 33.8 ounces
1 ounce = .03 liters	1 millimeter = .04 inches	1 kilogram = 2.2 pounds

TERMINAL CONFIGURATIONS

Terminal shapes vary from one battery to another. By identifying the correct replacement battery from the listing in this book, you the proper terminal configuration. For custom applications, refer to the following chart to identify terminal shape and corresponding batteries.

TERMINAL				BATTERY TYPE
TYPE	FRONT	SIDE	TOP	
A				LTx4L-BS, LT44L-BS, LTx5L-BS, LTx7A-BS, LTx7L-BS, LTx9-BS, LTx10L-BS, LTx12-BS, LTx12L-BS, LTx14L-BS, LTx14AH-BS, LTx14HL-BS, LTx15-BS, LTx15L-BS, LTx16-BS, LTx16L-BS, LTx16CL-BS, LTx18-BS, LTx18L-BS, LTx20-BS, LTx20L-BS, LTx20CH-BS, LTx20H-BS, LTx20HL-BS, LTx20HL-BS-PW, LTx24H-BS, LTx24HL-BS, EBx4L-BS, EBx5L-BS, EBZ5L-BS, EBZ6L-BS, EBx7L-BS, EBx7A-BS, EBx7B-BS, EBZ7L-BS, EBx9-BS, EB9B-BS, EBx10L-BS, EBZ10-BS, EBZ12-BS, EBZ14-BS, EBx12L-BS, EBx12-BS, EB12A-BS, EB12B-BS, EBx14L-BS, EBx14-BS, EB14B-BS, EBx14AH-BS, EBx14HL-BS, EBx15L-BS, EBx15-BS, EBx16L-BS, EBx16-BS, EB16B-BS, EB16BL-BS, EBx18L-BS, EBx18-BS, EBx20L-BS, EBx20-BS, EBx20HL-BS, EBx20H-BS, EBx20CH-BS, EBx24H-BS, EBx24HL-BS, EBx30L-BS, EBx30-BS, LT4-3, LT4A-3, LT5-3, LT7-3, LT7A-4, LT7B-4, LTZ7-3, LT9-4, LT9B-4, LT10-3, LTZ10-4, LT12A-4, LT12B-4, LT12-3, LT12-4, LTZ12-4, LT14-3, LT14A-4, LT14-4, LT14A-3, LT14B-4, LTZ14-4, LT15-3, LT15A-4, LT16-4, LT16-3, LT16C-3, LT18-3, LT18-4, LT20-3, LT20-4, LT20H-3, LT20H-4, LT20CH-4, LT24-3, LT24-4, LT30-3, LT30-4, EB4-3, EB5-3, EBZ5-3, EB7-3, EB7A-4, EB7B-4, EBZ7-3, EB9-4, EB9B-4, EB10-3, EBZ10A-4, EB12-3, EB12-4, EB12A-4, EB12B-4, EBZ12A-4, EB14-4, EB14A-3, EB14A-4, EB14B-4, EB14C-3, EB14C-4, EBZ14A-4, EB15-3, B15-4, EB16-3, EB16-4, EB16B-3, EB16B-4, EB18-3, EB18-4, EB20-3, EB20-4, EB20H-3, EB20H-4, EB20CH-4, EB24-3, EB24-4, EB30-3, EB30-4, 12N4-3B, 12N5-3B2, 12N7E-B, 12N7-3A2, 12N7-3B2, 12N7-4A2, 12N10-3B-1, LB4L-B, LB4L-A, LB5L-B2, LB7L-A2, LB7L-B2, LB7-A2, LB9L-A2, LB9L-B2, LB12AL-A1, LB12C-A, LB16B-A, LB16C-B, LB16CL-B, LB50-N18L-A3, LB30L-B, LB30CL-B, EBZ6-3, LTx7-BS, EBZ12L-BS, EB5.5-3, EB7D-4, EB8-4, EBx8-BS, EBx14AH-BS-PW, EB16BL-BS-PW, EBx20HL-BS-PW
B				LT3L-BS, LT3-3, LT7E-4, 6N6-3B, 6N6-3B-1, B39-6, B49-6, B38-6A, 6N11-2D, 6LB11-2D, 6N11A-1B, 6N11A-3, 6N11A-4, 6N11A-3A, 6N11A-4A, B54-6, B54-6A, 12N3-3A, 12N5-3B, 12N5-4B, 12N5.5-3B, 12N5.5-4A-1, 12N5.5-4B, 12N6-3B, 12N6-4B, 12N6.5-3B, 12N7-3A, 12N12A-4A-1(J), 12N7-3B, 12N7-4A, 12N7-4B, 12N7D-3B, 12N7A-3A, 12N7B-3A, 12N7A-4A, 12N7B-4A, 12N9-3A, 12N9-3A-1, 12N9-3B, 12N9-4B-1, 12N10-3A, 12N10-3A-1, 12N10-3B, 12N11-3A, 12N11-3B, 12N12-3A, 12N12-3B, 12N12A-4A-1, 12N14-3A, 12N16-3A, 12N16-3B, 12N16-4B, 12N18-3, LB3L-B, LB3L-A, LB3L-B, LB5L-B, LB6.5L-B, LB7-A, LB7L-A, LB7L-B, LB7B-B, LB9-B, LB9L-B, LB9A-A, LB10L-B, LB12A-A, LB12A-B, LB12AL-A, EB12AL-A, LB12AL-A2, LB14L-A, LB14A-A1, LB16-B, LB16L-B, LB16L-A2, LT5AL-BS, LT7D-BS, LT7DL-BS, LT9A-BS, LT5A-3-1, LT7D-3, LT7D-4, LT9A-4, LTx5.5L-BS, LT7E-3
				LT6-5-3
				12N5.5A-3B
C				LT24-3-1, 12N18-3-1, 12N18-3A, 12N18-3B, LB16B-A1**, HLB16A-A, HLB16A-AB, L50-N18L-A, L50-N18L-A2, SL50-N18L-A, SL50-N18L-A2, SL50-N18L-A1, L50-N18A-A, LB18-A, LB18L-A, LB18L-A2, 12N18-4A
D				12N6.5B-4B, 12N10-3A-2, 12N11-3A-1, 12N14-3B, 12N14-3A2, LB10L-A2, LB10L-B2, LB10A-A2, LB12B-B2, LB14-A2, LB14-B2, LB14L-A2, LB14L-B2, SLB14L-A2, SLB14L-B2, LB14A-A2, EB14L-A2
E				LTX16-BS-1, LT16A-4, 12N7C-3D, 12N7CZ-3D, LB7C-A, LB14L-A1, EBx16-BS-1, EB16A-4
				LB16B-A2
F				12N5.5-4A, LB9L-A1, LB16AL-A2
G				EBx20PL-BS, EB20P-3, 12C16A-3A, 12C16A-3B, L60-N24-A, L60-N24L-A, L60-N24AL-B, SL60-N24AL-B, L60-N28L-A, L60-N30L-A, L60-N30-A, L60-N30L-B, U1-5, U1R-5, U1-6, U1R-6, U1-7, U1R-7, U1-9, U1R-9, U1-11, U1R-11, EB20P-3-1
				12N24-3, 12N24-4, 12N24-3A, 12N24-4A
H				CHD4-12
I				LTR4A-BS, LTR4A-5
J				LT4B-BS, LT4B-5

** Includes terminal adaptor for converting to side mount.

* Includes terminal adaptor for converting to top mount.

BATTERY FEATURES

LT Series Dry Charged VRLA(AGM) Maintenance Free Battery(PP)



LT Series Factory Activated VRLA(AGM) Maintenance Free Battery(ABS)



EB Series Maintenance Free Battery(PP)



Flooded Battery(PP)



MX Series Factory Activated VRLA (AGM) Maintenance Free Battery (PP)



Maintenance-Free AGM/VRLA Battery

This batteries are constructed with lead calcium alloy and absorbed glass mat technology to provide you with "total maintenance-free" operation. No spills, no leaks, no water to check. This design will provide you with the most powerful, highest amp hour capacity, longest cycle-life product on the market. In addition, the fiberglass mat separators and high cell compression extend battery life by delivering superior vibration resistance from engine abuse or extreme road conditions.

Flooded Lead-acid Battery

In most cases, this battery was the original equipment battery provided by your equipment manufacturer. The leach conventional battery meets or exceeds the original specifications for starting and amp hour capacity. Heavy duty glass mat separators resist vibration damage and through-the-wall intercell connectors minimize internal resistance for maximum power. Quick remove vent and transparent case will make checking electrolyte levels easy.



MX POWERSPORT BATTERY

Battery Type	Nominal Voltage V	Capacity (10Hr) Ah	CCA 0 ° (-18 °) A	Battery Size						Assembly Figure (As Per Cover Polarity)	Terminal Type	Weight W/O Acid		Standard Factory Activated Battery	Dry Charged Battery	Regular Charge Current
				Dimensions-Millimeters (±2mm)			Dimensions-Inches (±1/16in)					Kg	Lbs			
				L	W	H	L	W	H							
MX9-4	12	8	120	150	87	105	5 7/8	3 2/4	4 1/8		N	3.1	6.8	LT9-4	EBX9-BS	0.8
MX12-4	12	10	180	150	87	130	5 7/8	3 7/16	5 1/8		N	4.1	9.0	LT12-4	EBX12-BS	1.0
MX14-3	12	12	230	150	87	145	5 7/8	3 2/4	5 6/8		N	4.7	10.4	LT14-3	EBX14L-BS	1.2
MX14-4	12	12	230	150	87	145	5 7/8	3 7/16	5 6/8		N	4.7	10.4	LT14-4	EBX14-BS	1.2
MX15-3	12	13	240	134	89	164	5 2/8	3 2/4	6 4/8		N	5.3	11.7	LT14A-3	EBX14AHL-BS	1.3
MX15-4	12	13	240	134	89	164	5 2/8	3 8/16	6 4/8		N	5.3	11.7	LT14A-4	EBX14AH-BS	1.3
MX16-3	12	19	350	175	100	155	6 7/8	4	6 1/8		N	7.5	16.5	EB16B-3	EB16BL-BS	1.9
MX16-4	12	19	350	175	100	155	6 7/8	3 15/16	6 1/8		N	7.5	16.5	EB16B-4	EB16B-BS	1.9
MX18-3	12	20	340	205	90	162	8 1/8	3 2/4	6 3/8		N	7.8	17.2	LT24-3	EBX24HL-BS	2.0
MX20-3	12	18	310	176	87	154	6 7/8	3 7/16	6 1/8		N	6.6	14.5	LT20H-3	EBX20HL-BS	1.8
MX30-3	12	30	440	169	131	175	6 5/8	5 3/16	6 7/8		N	10.1	22.2	LT30-3	EBX30L-BS	3.0



MAINTENANCE FREE
BATTERY



LT SERIES DRY CHARGED VRLA(AGM) MAINTENANCE FREE BATTERY(PP)

Battery Type	Nominal Voltage V	Capacity (10Hr) Ah	CCA 0°C (-18°C) A	Battery Size						Assembly Figure (As Per Cover Polarity)	Terminal Type	Weight W/O Acid		Electrolyte		Total Weight for Battery	Regular Charge Current	
				Dimensions-Millimeters (±2mm)			Dimensions-Inches (±1/16in)					Kg	Lbs	Volume Liters	Weight Kg			
				L	W	H	L	W	H									
BLT4-BS	6	4	N/A	70	70	95	2 3/4	2 3/4	3 3/4		/	0.67	1.5	0.1	0.17	0.84	0.4	
LT2.5L-BS	12	2.5	25	80	70	105	3 1/8	2 3/4	4 1/8		/	0.92	2.0	0.2	0.21	1.13	0.3	
LT2.5L-BS-I	12	2.5	20	80	70	105	3 1/8	2 3/4	4 1/8		/	0.80	1.8	0.2	0.22	1.02	0.3	
LT3L-BS	12	3	35	98	56	110	3 7/8	2 1/4	4 3/8		B	0.96	2.1	0.2	0.23	1.19	0.3	
LTRA4-BS	12	2.3	45	113	48	85	4 7/16	1 7/8	3 3/8		I	0.82	1.8	0.1	0.16	0.98	0.2	
LT4B-BS	12	2.3	40	113	38	85	4 4/8	1 2/4	3 3/8		J	0.78	1.7	0.1	0.14	0.92	0.2	
LT4XL-BS	12	3	50	113	70	85	4 7/16	2 3/4	3 3/8		A	1.20	2.6	0.2	0.22	1.42	0.3	
LT4AL-BS	12	4	60	120	70	92	4 6/8	2 3/4	3 5/8		A	1.29	2.8	0.2	0.27	1.56	0.4	
LT5L-BS	12	4	70	113	70	105	4 4/8	2 3/4	4 1/8		A	1.47	3.2	0.2	0.30	1.77	0.4	
LT5AL-BS	12	5	75	120	60	130	4 3/4	2 3/8	5 1/8		B	1.52	3.3	0.3	0.36	1.88	0.5	
LT6L-BS	12	6.5	105	139	66	100	5 2/4	2 2/4	4		B	1.88	4.1	0.3	0.38	2.26	0.7	
LT7A-BS	12	6	90	150	87	93	5 7/8	3 2/4	3 5/8		A	2.04	4.5	0.3	0.45	2.49	0.6	
LT7B-BS	12	6	110	113	70	130	4 4/8	2 3/4	5 1/8		A	1.99	4.4	0.3	0.41	2.40	0.6	
LT7L-BS	12	6	85	113	70	130	4 7/16	2 3/4	5 1/8		A	1.99	4.4	0.3	0.41	2.40	0.6	
LT7D-BS	12	7	115	146	60	130	5 6/8	2 1/4	5 1/8		B	1.90	4.2	0.4	0.47	2.37	0.7	
LT7DL-BS	12	7	90	146	60	130	5 6/8	2 3/8	5 1/8		B	1.90	4.2	0.4	0.47	2.37	0.7	
LT9B-BS	12	8	120	150	87	105	5 7/8	3 2/4	4 1/8		A	2.48	5.5	0.4	0.56	3.04	0.8	
LT9A-BS	12	9	120	135	75	139	5 3/8	2 15/16	5 4/8		B	2.46	5.4	0.5	0.61	3.07	0.9	
LT10L-BS	12	10	160	135	90	145	5 5/16	3 9/16	5 11/16		A	2.84	6.3	0.7	0.88	3.72	1.0	
LT12-BS	12	10	180	150	87	130	5 14/16	3 7/16	5 2/16		A	3.16	7.0	0.6	0.75	3.91	1.0	
LT12L-BS	12	10	180	150	87	130	5 7/8	3 7/16	5 1/8		A	3.16	7.0	0.6	0.75	3.91	1.0	
LT14L-BS	12	12	200	150	87	145	5 14/16	3 7/16	5 11/16		A	3.50	7.7	0.6	0.86	4.36	1.2	
LT14L-BS	12	12	200	150	87	145	5 7/8	3 7/16	5 11/16		A	3.50	7.7	0.6	0.86	4.36	1.2	
LT14AH-BS	12	12	210	135	90	164	5 5/16	3 9/16	6 7/16		A	3.74	8.2	0.7	0.89	4.63	1.2	
LT14AHL-BS	12	12	210	135	90	164	5 5/16	3 9/16	6 7/16		A	3.74	8.2	0.7	0.89	4.63	1.2	
LT15L-BS	12	13	230	175	87	130	6 7/8	3 7/16	5 1/8		A	3.76	8.3	0.7	0.90	4.66	1.3	
LT15L-BS	12	13	230	175	87	130	6 14/16	3 7/16	5 2/16		A	3.76	8.3	0.7	0.90	4.66	1.3	
LT16L-BS	12	14	230	150	87	161	5 7/8	3 7/16	6 5/16		A	4.08	9.0	0.8	0.99	5.07	1.4	
LT16L-BS	12	14	230	150	87	161	5 14/16	3 7/16	6 5/16		A	4.08	9.0	0.8	0.99	5.07	1.4	
LT16L-BS-I	12	14	230	150	87	161	5 7/8	3 7/16	6 5/16		E	4.05	8.9	0.8	0.99	5.04	1.4	
LT16CL-BS	12	19	260	175	100	175	6 14/16	3 15/16	6 14/16		A	5.17	11.4	1.0	1.27	6.44	1.9	
LT18L-BS	12	18	250	205	87	162	8 1/16	3 7/16	6 3/8		A	5.07	11.2	1.1	1.45	6.52	1.8	
LT18L-BS	12	18	250	205	87	162	8 1/16	3 7/16	6 6/16		A	5.07	11.2	1.1	1.45	6.52	1.8	
LT20L-BS	12	18	270	175	87	155	6 7/8	3 7/16	6 1/8		A	4.73	10.4	0.9	1.17	5.90	1.8	
LT20L-BS	12	18	270	175	87	155	6 14/16	3 7/16	6 2/16		A	4.73	10.4	0.9	1.17	5.90	1.8	
LT20CH-BS	12	18	270	150	87	161	5 7/8	3 7/16	6 5/16		A	4.54	10.0	0.8	1.08	5.62	1.8	
LT20H-BS	12	18	310	175	87	155	6 14/16	3 7/16	6 2/16		A	4.91	10.8	0.9	1.17	6.08	1.8	
LT20HL-BS	12	18	310	175	87	155	6 7/8	3 7/16	6 1/8		A	4.91	10.8	0.9	1.17	6.08	1.8	
LT20HL-BS-PW	12	18	300	175	87	175	6 14/16	3 7/16	6 14/16		A	4.98	11.0	0.9	1.17	6.15	1.8	
LT24H-BS	12	21	350	205	87	162	8 1/16	3 7/16	6 3/8		A	5.82	12.8	1.0	1.32	7.14	2.1	
LT24HL-BS	12	21	350	205	87	162	8 1/16	3 7/16	6 6/16		A	5.82	12.8	1.0	1.32	7.14	2.1	





EB SERIES DRY CHARGED VRLA(AGM) MAINTENANCE FREE BATTERY(PP)

Battery Type	Nominal Voltage V	Capacity (10Hr) Ah	CCA 0°F (-18°F) A	Battery Size						Assembly Figure (As Per Cover Polarity)	Terminal Type	Weight W/O Acid	Electrolyte		Total Weight for Battery	Regular Charge Current	
				Dimensions-Millimeters (±2mm)			Dimensions-Inches (±1/16")						Volume	Weight			
				L	W	H	L	W	H								
EBK4L-BS	12	3	50	113	70	85	4 7/16	2 3/4	3 1/2		A	1.20	2.6	0.2	0.22	1.42	0.3
EBK5L-BS	12	4	70	113	70	105	4 7/16	2 3/4	4		A	1.50	3.3	0.2	0.30	1.80	0.4
EBZ5L-BS	12	3.5	70	113	70	85	4 7/16	2 3/4	3 1/2		A	1.20	2.6	0.2	0.22	1.42	0.4
EBK5L-BS	12	5.5	75	135	60	130	5 5/16	2 1/4	5		A	1.60	3.5	0.3	0.45	2.05	0.6
EBZ6L-BS	12	5	90	113	70	105	4 7/16	2 3/4	4		A	1.69	3.7	0.2	0.31	2.00	0.5
EBK7L-BS	12	6	85	113	70	130	4 7/16	2 3/4	5		A	2.02	4.4	0.3	0.41	2.43	0.6
EBK7A-BS	12	6	90	150	87	93	5 14/16	3 2/4	3 1/2		A	2.07	4.6	0.3	0.45	2.52	0.6
EB7B-BS	12	6.5	85	150	86	93	5 14/16	2 2/4	3 1/2		A	1.95	4.3	0.3	0.39	2.34	0.7
EBZ7L-BS	12	6	130	113	70	105	4 7/16	2 3/4	4		A	1.82	4.0	0.3	0.36	2.18	0.6
EBZ7L-BS	12	7	115	146	60	130	5 5/8	2 3/8	5 1/8		A	1.94	4.3	0.4	0.46	2.40	0.7
EBK8-BS-1	12	7	75	135	75	133	5 5/16	3	5		B	2.03	4.5	0.4	0.57	2.60	0.7
EBK8-BS	12	8	105	135	75	133	5 5/16	3	5		A	2.23	4.9	0.4	0.56	2.79	0.8
EBK9-BS	12	8	120	150	87	105	5 14/16	3 2/4	4		A	2.53	5.6	0.4	0.56	3.09	0.8
EB9A-BS	12	9	120	135	75	139	5 5/16	3	5 1/2		A	2.50	5.5	0.5	0.61	3.11	0.9
EB9B-BS	12	8	115	150	70	105	5 14/16	2 3/4	4		A	2.32	5.1	0.4	0.48	2.80	0.8
EBK10L-BS	12	10	160	133	90	145	5 4/16	3 2/4	5 1/2		A	2.89	6.4	0.7	0.88	3.77	1.0
EBZ10L-BS	12	8.6	190	150	88	93	5 14/16	3 2/4	3 1/2		A	2.68	5.9	0.4	0.52	3.20	0.9
EBZ12L-BS	12	11	210	150	88	110	5 14/16	3 2/4	4 1/2		A	3.33	7.3	0.5	0.64	3.97	1.1
EBZ12L-BS	12	11	210	150	88	110	5 14/16	3 2/4	4 1/2		A	3.33	7.3	0.5	0.64	3.97	1.1
EBZ14L-BS	12	11.2	230	150	88	110	5 14/16	3 2/4	4 1/2		A	3.33	7.3	0.5	0.64	3.97	1.1
EBK12L-BS	12	10	180	150	87	130	5 14/16	3 2/4	5		A	3.22	7.1	0.6	0.75	3.97	1.0
EBK12L-BS	12	10	180	150	87	130	5 14/16	3 2/4	5		A	3.22	7.1	0.6	0.75	3.97	1.0
EB12A-BS	12	10	175	150	88	105	5 14/16	3 2/4	4		A	2.67	5.9	0.5	0.65	3.32	1.0
EB12B-BS	12	10	175	150	70	130	5 14/16	2 3/4	5		A	2.99	6.6	0.5	0.64	3.63	1.0
EBK14L-BS	12	12	200	150	87	145	5 14/16	3 2/4	5 1/2		A	3.54	7.8	0.6	0.86	4.40	1.2
EBK14L-BS	12	12	200	150	87	145	5 7/8	3 7/16	5 11/16		A	3.54	7.8	0.6	0.86	4.40	1.2
EB14B-BS	12	12	210	150	70	145	5 14/16	3 2/4	5 1/2		A	3.36	7.4	0.6	0.76	4.12	1.2
EBK14HL-BS	12	12	210	133	90	164	5 2/8	3 9/16	6 7/16		A	3.94	8.7	0.6	0.77	4.71	1.2
EBK14H-BS	12	12	210	133	90	164	5 4/16	3 2/4	6 1/2		A	3.94	8.7	0.6	0.77	4.71	1.2
EBK14H-BS-PW	12	12	240	133	90	174	5 2/8	3 9/16	6 14/16		A	3.99	8.8	0.6	0.77	4.76	1.2
EBK15L-BS	12	13	230	175	87	130	6 14/16	3 2/4	5		A	3.81	8.4	0.7	0.90	4.71	1.3
EBK15L-BS	12	13	230	175	87	130	6 7/8	3 7/16	5 2/16		A	3.81	8.4	0.7	0.90	4.71	1.3
EBK16L-BS	12	14	230	150	87	161	5 14/16	3 2/4	6 1/2		A	4.13	9.1	0.8	0.99	5.12	1.4
EBK16L-BS	12	14	230	150	87	161	5 7/8	3 7/16	6 5/16		A	4.13	9.1	0.8	0.99	5.12	1.4
EBK16L-BS-1	12	14	250	150	87	161	5 14/16	3 2/4	6 1/2		E	4.10	9.0	0.8	0.99	5.09	1.4
EBK16L-BS-2	12	14	250	150	87	161	5 14/16	3 2/4	6 1/2		E	4.45	9.8	0.8	0.99	5.44	1.4
EB16BL-BS	12	19	260	175	100	155	6 7/8	3 15/16	6 2/16		A	5.10	11.5	1.0	1.27	6.37	1.9
EB16BL-BS-PW	12	19	260	175	100	175	6 14/16	4	7		A	5.18	11.5	1.0	1.27	6.45	1.9
EB16B-BS	12	19	260	175	100	155	6 7/8	3 15/16	6 2/16		A	5.10	11.5	1.0	1.27	6.37	1.9
EBK18L-BS	12	18	300	205	87	162	8 1/16	3 2/4	6 1/2		A	5.17	11.4	1.1	1.45	6.62	1.8
EBK18L-BS	12	18	300	205	87	162	8 1/8	3 7/16	6 5/16		A	5.17	11.4	1.1	1.45	6.62	1.8
EBK20L-BS	12	18	270	175	87	155	6 14/16	3 2/4	6		A	4.90	10.8	0.9	1.17	6.07	1.8
EBK20L-BS	12	18	270	175	87	155	6 7/8	3 7/16	6 2/16		A	4.90	10.8	0.9	1.17	6.07	1.8
EBK20HL-BS	12	18	310	175	87	155	6 14/16	3 2/4	6		A	4.90	10.8	0.9	1.17	6.07	1.8
EBK20HL-BS-PW	12	18	310	175	87	175	6 7/8	3 7/16	6 14/16		A	5.00	11.0	0.9	1.17	6.17	1.8
EBK20H-BS	12	18	310	175	87	155	6 14/16	3 2/4	6		A	4.90	10.8	0.9	1.17	6.07	1.8
EBK20CH-BS	12	18	270	150	87	161	5 7/8	3 7/16	6 5/16		A	4.55	10.0	0.8	1.08	5.63	1.8
EBK20PL-BS	12	18	275	182	77	168	7 3/16	3	6 1/2		G	4.60	10.1	0.8	1.07	5.67	1.8
EBK24HL-BS	12	21	350	205	87	162	8 1/8	3 7/16	6 5/16		A	5.84	12.9	1.0	1.32	7.16	2.1
EBK24H-BS	12	21	350	205	87	162	8 1/16	3 2/4	6 1/2		A	5.84	12.9	1.0	1.32	7.16	2.1
EBK30L-BS	12	30	385	166	126	173	6 4/8	4 15/16	6 13/16		A	8.13	17.9	1.4	1.80	9.93	3.0
EBK30L-BS	12	30	385	166	126	173	6 9/16	5	7		A	8.13	17.9	1.4	1.80	9.93	3.0



LT SERIES FACTORY ACTIVATED VRLA(AGM) MAINTENANCE FREE BATTERY(ABS)

Battery Type	Nominal Voltage V	Capacity (10Hr) Ah	CCA 0 ° (-18 °) A	Battery Size						Assembly Figure (As Per Cover Polarity)	Terminal Type	Total Weight for Battery		Regular Charge Current
				Dimensions-Millimeters (±2mm)			Dimensions-Inches (± 1/16")					Kg	Lbs	
				L	W	H	L	W	H					
6LT4-2	6	4	N/A	70	70	95	2 3/4	2 3/4	3 3/4		I	0.86	1.9	0.4
LT2.5-3	12	2.5	25	80	70	105	3 1/8	2 3/4	4 1/8		I	1.17	2.6	0.3
LT2.5-3-1	12	2.5	20	80	70	105	3 1/8	2 3/4	4 1/8		I	1.06	2.3	0.3
LT2.5-3-2	12	2.5	20	80	70	105	3 1/4	2 3/4	4 1/4		I	1.01	2.2	0.3
LT3-3	12	3	35	98	56	110	3 3/4	2 1/4	4 1/4		B	1.20	2.6	0.3
LTR4A-5	12	2.3	45	113	48	85	4 4/8	2	3 3/8		I	0.96	2.1	0.2
LTR4B-5	12	2.3	30	113	48	85	4 2/4	2	3 1/4		I	0.96	2.1	0.2
LT4B-5	12	2.3	40	113	38	85	4 4/8	1 2/4	3 3/8		J	0.91	2.0	0.2
LT4-3	12	3	50	113	70	85	4 2/4	2 3/4	3 1/4		A	1.44	3.2	0.3
LT4A-3	12	4	60	120	70	92	4 6/8	2 3/4	3 5/8		A	1.58	3.5	0.4
LT5-3	12	4	70	113	70	105	4 4/8	2 3/4	4 1/8		A	1.80	4.0	0.4
LT5A-3-1	12	5	85	119	59	130	4 3/4	2 1/4	5		B	1.91	4.2	0.5
LT6.5-3	12	6.5	85	139	66	102	5 2/4	2 2/4	4		B	2.33	5.1	0.7
LT7-3	12	6	85	113	70	130	4 4/8	2 3/4	5 1/8		A	2.42	5.3	0.6
LT7A-4	12	6	90	150	87	93	5 3/4	3 2/4	3 3/4		A	2.55	5.6	0.6
LT7B-4	12	6.5	85	150	65	93	5 7/8	2 2/4	3 5/8		A	2.30	5.1	0.7
LT7D-3	12	7	90	146	60	130	5 3/4	2 1/4	5		B	2.41	5.3	0.7
LT7D-4	12	7	115	146	60	130	5 6/8	2 1/4	5 1/8		B	2.41	5.3	0.7
LT7E-4	12	7	90	136	75	122	5 1/4	3	4 3/4		B	2.55	5.6	0.7
LT7E-3	12	7	100	136	75	122	5 3/8	3	4 6/8		B	2.55	5.6	0.7
LTZ7-3	12	6	130	113	70	105	4 2/4	2 3/4	4 1/4		A	2.08	4.6	0.6
LT9-4	12	8	120	150	87	105	5 7/8	3 2/4	4 1/8		A	3.05	6.7	0.8
LT9A-3	12	9	120	135	75	139	5 1/4	3	5 2/4		B	3.07	6.8	0.9
LT9A-4	12	9	120	135	75	139	5 1/4	3	5 2/4		B	3.07	6.8	0.9
LT9A-4-PW	12	9	120	135	75	154	5 1/4	3	6 1/8		B	3.12	6.9	0.9
LT9B-4	12	8	115	150	88	105	5	2 3/4	4 1/4		A	2.71	6.0	0.8
LT10-3	12	10	160	135	90	145	5 3/8	3 4/8	5 6/8		A	3.73	8.2	1.0
LT10-3-PW	12	10	160	135	90	155	5 3/8	3 4/8	6 1/8		A	3.77	8.3	1.0
LTZ10-4	12	8.6	190	150	87	93	5 7/8	3 7/16	3 11/16		A	2.91	6.4	0.9
LT12A-4	12	10	175	150	87	105	5 7/8	3 7/16	4 1/8		A	3.40	7.5	1.0
LT12B-4	12	10	175	150	89	130	5 7/8	2 11/16	5 1/8		A	3.56	7.8	1.0
LT12-3	12	10	180	150	87	130	5 7/8	3 7/16	5 1/8		A	3.99	8.8	1.0
LT12-4	12	10	180	150	87	130	5 7/8	3 7/16	5 1/8		A	3.99	8.8	1.0
LTZ12-4	12	11	210	150	87	110	5 7/8	3 7/16	4 5/16		A	3.40	7.5	1.1
LT14-3	12	12	200	150	87	145	5 7/8	3 7/16	5 6/8		A	4.46	9.8	1.2
LT14-4	12	12	200	150	87	145	5 7/8	3 7/16	5 11/16		A	4.46	9.8	1.2
LT14A-4	12	12	210	135	90	167	5 3/8	3 9/16	6 4/8		A	4.72	10.4	1.2
LT14A-4-PW	12	12	210	135	90	176	5 3/8	3 9/16	6 7/8		A	4.76	10.5	1.2
LT14A-3	12	12	210	135	90	167	5 5/16	3 9/16	6 4/8		A	4.72	10.4	1.2
LT14B-4	12	12	210	150	89	145	5 7/8	2 11/16	5 6/8		A	4.16	9.2	1.2
LTZ14-4	12	11.2	230	150	87	110	5 7/8	3 7/16	4 5/16		A	3.57	7.9	1.1
LT15-3	12	13	230	175	87	130	6 7/8	3 7/16	5 1/8		A	4.73	10.4	1.3
LT15-4	12	13	230	175	87	130	6 7/8	3 7/16	5 1/8		A	4.73	10.4	1.3
LT16-3	12	14	230	150	87	161	5 7/8	3 7/16	6 3/8		A	5.16	11.4	1.4
LT16-4	12	14	230	150	87	161	5 7/8	3 7/16	6 5/16		A	5.16	11.4	1.4
LT16A-4	12	14	230	150	87	161	5 7/8	3 7/16	6 3/8		E	5.12	11.3	1.4
LT16C-3	12	19	260	175	100	175	6 7/8	3 15/16	6 7/8		A	6.53	14.4	1.9
LT18-3	12	18	250	205	87	162	6 1/8	3 7/16	6 3/8		A	6.64	14.6	1.8
LT18-4	12	18	250	205	87	162	6 1/16	3 7/16	6 3/8		A	6.64	14.6	1.8
LT20-3	12	18	270	175	87	155	6 7/8	3 7/16	6 1/8		A	5.93	13.1	1.8
LT20-4	12	18	270	175	87	155	6 7/8	3 7/16	6 1/8		A	5.93	13.1	1.8
LT20H-3	12	18	310	175	87	155	6 7/8	3 7/16	6 1/8		A	6.12	13.5	1.8
LT20H-4	12	18	310	175	87	155	6 7/8	3 7/16	6 1/8		A	6.12	13.5	1.8
LT20CH-4	12	18	270	150	87	161	5 7/8	3 7/16	6 3/8		A	5.66	12.5	1.8
LT24-3	12	21	350	205	87	162	6 1/8	3 7/16	6 3/8		A	7.27	16.0	2.1
LT24-4	12	21	350	205	87	162	6 1/16	3 7/16	6 3/8		A	7.27	16.0	2.1
LT24-3-1	12	21	350	205	87	162	6 1/8	3 7/16	6 3/8		C	7.27	16.0	2.1
LT30-3	12	30	385	165	125	175	6 1/2	4 15/16	7 4/8		A	10.00	22.0	3.0
LT30-3-PW	12	30	440	165	125	192	6 1/2	4 15/16	6 7/8		A	9.95	21.9	3.0
LT30-4	12	30	385	165	125	175	6 4/8	4 15/16	6 7/8		A	9.95	21.9	3.0



EB SERIES FACTORY ACTIVATED VRLA(AGM) MAINTENANCE FREE BATTERY(PP)

Battery Type	Nominal Voltage V	Capacity (10hr) Ah	CCA 0° (-18°) A	Battery Size						Assembly Figure (As Per Cover Polarity)	Terminal Type	Total Weight for Battery		Regular Charge Current
				Dimensions-Millimeters (±2mm)			Dimensions-Inches (±1/16in)					Kg	Lbs	A
				L	W	H	L	W	H					
EB4-3	12	3	50	113	70	85	4 7/16	2 3/4	3 1/2		A	1.45	3.2	0.3
EB5-3	12	4	70	113	70	105	4 7/16	2 3/4	4		A	1.78	3.9	0.4
EB25-3	12	3.5	70	113	70	85	4 7/16	2 3/4	3 1/2		A	1.45	3.2	0.4
EB5.5-3	12	5.5	75	135	60	130	5 5/16	2 1/4	5		A	2.05	4.5	0.6
EB26-3	12	5	90	113	70	105	4 7/16	2 3/4	4 1/8		A	2.00	4.4	0.5
EB7-3	12	6	85	113	70	130	4 7/16	2 3/4	5		A	2.43	5.4	0.6
EB7A-4	12	6	90	150	87	93	5 7/8	3 7/16	3 11/16		A	2.52	5.6	0.6
EB7B-4	12	6.5	85	150	66	93	5 7/8	2 10/16	3 11/16		A	2.37	5.2	0.7
EB7D-4	12	7	115	146	60	130	5 6/8	2 3/8	5 1/8		A	2.41	5.3	0.7
EB27-3	12	6	130	113	70	105	4 7/16	2 3/4	4 1/8		A	2.15	4.7	0.6
EB8-4	12	8	120	135	75	133	5 5/16	2 15/16	5		A	2.81	6.2	0.8
EB9-4	12	8	120	150	87	105	5 14/16	3 2/4	4 1/8		A	3.06	6.7	0.8
EB9A-4	12	9	120	135	75	139	5 5/16	2 15/16	5 1/2		A	3.12	6.9	0.9
EB9B-4	12	8	115	150	70	105	5 7/8	2 12/16	4 1/8		A	2.83	6.2	0.8
EB10-3	12	10	160	133	90	145	5 4/16	3 9/16	5 11/16		A	3.78	8.3	1.0
EB210-4	12	8.6	190	150	88	93	5 7/8	3 7/16	3 5/8		A	3.20	7.0	0.9
EB210A-4	12	8.6	190	150	88	93	5 7/8	3 7/16	3 11/16		A	3.20	7.0	0.9
EB12-3	12	10	180	150	87	130	5 7/8	3 7/16	5 1/8		A	3.95	8.7	1.0
EB12-4	12	10	180	150	87	130	5 7/8	3 7/16	5 1/8		A	3.95	8.7	1.0
EB12A-4	12	10	175	150	88	105	5 7/8	3 7/16	4 1/8		A	3.34	7.4	1.0
EB12B-4	12	10	175	150	70	130	5 7/8	2 12/16	5 1/8		A	3.67	8.1	1.0
EB212-4	12	11	210	150	88	110	5 7/8	3 7/16	4 5/16		A	4.02	8.9	1.1
EB212A-4	12	11	210	150	88	110	5 7/8	3 7/16	4 5/16		A	4.03	8.9	1.1
EB14-4	12	14	200	150	87	145	5 7/8	3 7/16	5 11/16		A	4.81	10.6	1.4
JB14-4	12	14	210	150	87	145	5 7/8	3 7/16	5 11/16		K	4.75	10.5	1.4
EB14A-3	12	12	210	133	90	164	5 2/8	3 9/16	6 7/16		A	4.75	10.5	1.2
EB14A-4	12	12	210	133	90	164	5 4/16	3 9/16	6 7/16		A	4.75	10.5	1.2
MB14-4	12	12	210	150	87	145	5 7/8	3 7/16	5 11/16		M	4.80	10.6	1.2
EB14B-4	12	12	210	150	70	145	5 7/8	2 12/16	5 11/16		A	4.15	9.1	1.2
EB14C-3	12	12	200	150	87	145	5 7/8	3 7/16	5 11/16		A	4.40	9.7	1.2
EB14C-4	12	12	200	150	87	145	5 7/8	3 7/16	5 11/16		A	4.40	9.7	1.2
EB214-4	12	11.2	230	150	88	110	5 7/8	3 7/16	4 5/16		A	4.02	8.9	1.1
EB214A-4	12	11.2	230	150	88	110	5 7/8	3 7/16	4 5/16		A	4.03	8.9	1.1
EB15-3	12	13	230	175	87	130	6 7/8	3 7/16	5 2/16		A	4.74	10.4	1.3
EB15-4	12	13	230	175	87	130	6 7/8	3 7/16	5 2/16		A	4.74	10.4	1.3
EB16-3	12	14	230	150	87	161	5 7/8	3 7/16	6 5/16		A	5.16	11.4	1.4
EB16-4	12	14	230	150	87	161	5 7/8	3 7/16	6 5/16		A	5.16	11.4	1.4
EB16A-4	12	14	250	150	87	161	5 7/8	3 7/16	6 5/16		E	5.13	11.3	1.4
EB16B-3	12	19	260	175	100	155	6 7/8	3 15/16	6 2/16		A	6.40	14.1	1.9
EB16B-4	12	19	260	175	100	155	6 7/8	3 15/16	6 2/16		A	6.40	14.1	1.9
EB18-3	12	18	250	205	87	162	8 1/16	3 7/16	6 3/8		A	6.83	14.8	1.8
EB18-4	12	18	250	205	87	162	8 1/8	3 7/16	6 6/16		A	6.83	14.8	1.8
EB20-3	12	18	270	175	87	155	6 7/8	3 7/16	6 2/16		A	6.04	13.3	1.8
EB20-4	12	18	270	175	87	155	6 7/8	3 7/16	6 2/16		A	6.04	13.3	1.8
EB20H-3	12	18	310	175	87	155	6 7/8	3 7/16	6 2/16		A	6.04	13.3	1.8
EB20H-4	12	18	310	175	87	155	6 7/8	3 7/16	6 2/16		A	6.04	13.3	1.8
EB20CH-4	12	18	270	150	87	161	5 7/8	3 7/16	6 5/16		A	5.64	12.4	1.8
EB20P-3	12	18	275	182	77	168	7 1/8	3 1/16	6 10/16		G	5.66	12.5	1.8
EB20P-3-1	12	18	275	182	77	168	7 1/8	3 1/16	6 1/2		G	5.67	12.5	1.8
EB24-3	12	21	350	205	87	162	8 1/8	3 7/16	6 6/16		A	7.18	15.8	2.1
EB24-4	12	21	350	205	87	162	8 1/16	3 7/16	6 3/8		A	7.18	15.8	2.1
EB30-3	12	30	385	166	126	173	6 4/8	4 15/16	6 13/16		A	9.81	21.6	3.0
EB30-4	12	30	385	166	126	173	6 1/2	4 15/16	6 6/8		A	9.81	21.6	3.0



HIGH PERFORMANCE FLOODED BATTERY

Battery Type	Nominal Voltage V	Capacity (10Hr) Ah	Battery Size						Assembly Figure (As Per Cover Polarity)	Terminal Type	Weight W/O Acid		Electrolyte		Total Weight for Battery	Regular Charge Current
			Dimensions-Millimeters (±2mm)			Dimensions-Inches (±1/16in)					Kg	Lbs	Liters	Kg		
			L	W	H	L	W	H								
LB2.5L-C	12	2.5	80	70	105	3 1/8	2 3/4	4 1/8		/	0.77	1.70	0.24	0.31	1.08	0.3
LB2.5L-C-2	12	2.5	80	70	105	3 1/8	2 3/4	4 1/8		/	0.77	1.70	0.24	0.31	1.08	0.3
LB3L-A	12	3	98	56	110	3 7/8	2 1/4	4 3/8		B	0.95	2.09	0.23	0.29	1.24	0.3
LB3L-B	12	3	98	56	110	3 7/8	2 1/4	4 3/8		B	0.95	2.09	0.23	0.29	1.24	0.3
LB4L-B	12	4	120	70	92	4 6/8	2 3/4	3 5/8		A	1.23	2.71	0.27	0.35	1.58	0.4
LB4L-A	12	4	120	70	92	4 6/8	2 3/4	3 5/8		A	1.23	2.71	0.27	0.35	1.58	0.4
LB5L-B	12	5	120	61	130	4 6/8	2 1/4	5 1/8		B	1.59	3.51	0.37	0.47	2.06	0.5
LB5L-B2	12	5	120	61	130	4 6/8	2 1/4	5 1/8		A	1.60	3.53	0.38	0.48	2.08	0.5
LB6.5L-B	12	6.5	138	73	107	5 3/8	2 3/4	4 2/8		B	1.80	3.97	0.40	0.51	2.31	0.7
LB7-A	12	8	135	75	133	5 3/8	3	5 2/8		B	2.10	4.63	0.56	0.72	2.82	0.8
LB7L-A	12	8	135	75	133	5 3/8	3	5 2/8		B	2.10	4.63	0.56	0.72	2.82	0.8
LB7L-B	12	8	135	75	133	5 3/8	3	5 2/8		B	2.10	4.63	0.56	0.72	2.82	0.8
LB7L-A2	12	8	135	75	133	5 3/8	3	5 2/8		A	2.12	4.67	0.56	0.72	2.84	0.8
LB7L-B2	12	8	135	75	133	5 3/8	3	5 2/8		A	2.12	4.67	0.56	0.72	2.84	0.8
LB7-A2	12	8	135	75	133	5 3/8	3	5 2/8		A	2.12	4.67	0.56	0.72	2.84	0.8
LB7B-B	12	7	150	60	130	5 7/8	2 1/4	5 1/8		B	2.00	4.41	0.49	0.63	2.63	0.7
LB7C-A	12	8	130	90	114	5 1/8	3 2/4	4 4/8		E	2.10	4.63	0.56	0.74	2.84	0.8
LB9-B	12	9	135	75	139	5 3/8	3	5 4/8		B	2.27	5.00	0.56	0.72	2.99	0.9
LB9L-B	12	9	135	75	139	5 3/8	3	5 4/8		B	2.27	5.00	0.56	0.72	2.99	0.9
LB9L-A1	12	9	135	75	139	5 3/8	3	5 4/8		F	2.27	5.00	0.56	0.72	2.99	0.9
LB9L-A2	12	9	135	75	139	5 3/8	3	5 4/8		A	2.27	5.00	0.56	0.72	2.99	0.9
LB9L-B2	12	9	135	75	139	5 3/8	3	5 4/8		A	2.27	5.00	0.56	0.72	2.99	0.9
LB9A-A	12	9	135	75	155	5 3/8	3	6 1/8		B	2.27	5.00	0.56	0.72	2.99	0.9
LB10L-A2	12	11	134	89	145	5 3/8	3 2/4	5 6/8		D	2.85	6.28	0.69	0.88	3.73	1.1
LB10L-B	12	11	134	89	145	5 3/8	3 2/4	5 6/8		B	2.85	6.28	0.69	0.88	3.73	1.1
LB10L-B2	12	11	134	89	145	5 3/8	3 2/4	5 6/8		D	2.85	6.28	0.69	0.88	3.73	1.1
LB10A-A2	12	11	134	89	155	5 3/8	3 2/4	6 1/8		D	2.86	6.35	0.69	0.88	3.76	1.1
LB12A-A	12	12	134	81	160	5 2/8	3 1/4	6 2/8		B	3.16	6.97	0.70	0.90	4.06	1.2
LB12A-B	12	12	134	81	160	5 2/8	3 1/4	6 2/8		B	3.16	6.97	0.70	0.90	4.06	1.2
LB12AL-A	12	12	134	81	160	5 2/8	3 1/4	6 2/8		B	3.16	6.97	0.70	0.90	4.06	1.2
LB12AL-A1	12	12	134	81	160	5 2/8	3 1/4	6 2/8		A	3.16	6.97	0.70	0.90	4.06	1.2
LB12AL-A2	12	12	134	81	160	5 2/8	3 1/4	6 2/8		B	3.16	6.97	0.70	0.90	4.06	1.2
LB12B-B2	12	12	160	90	130	6 2/8	3 2/4	5 1/8		D	2.95	6.50	0.77	0.99	3.94	1.2
LB12C-A	12	12	134	81	175	5 2/8	3 1/4	6 7/8		A	3.18	7.01	0.70	0.90	4.08	1.2
LB14-A2	12	14	134	89	166	5 2/8	3 2/4	6 4/8		D	3.53	7.78	0.84	1.08	4.61	1.4
LB14-B2	12	14	134	89	166	5 2/8	3 2/4	6 4/8		D	3.53	7.78	0.84	1.08	4.61	1.4
LB14L-A	12	14	134	89	166	5 2/8	3 2/4	6 4/8		B	3.53	7.78	0.84	1.08	4.61	1.4
LB14L-A1	12	14	134	89	166	5 2/8	3 2/4	6 4/8		E	3.53	7.78	0.84	1.08	4.61	1.4
LB14L-A2	12	14	134	89	166	5 2/8	3 2/4	6 4/8		D	3.53	7.78	0.84	1.08	4.61	1.4
EB14L-A2	12	14	134	89	166	5 2/8	3 2/4	6 4/8		D	3.66	8.55	0.78	1.00	4.66	1.4
LB14L-B2	12	14	134	89	166	5 2/8	3 2/4	6 4/8		D	3.53	7.78	0.84	1.08	4.61	1.4



HIGH PERFORMANCE FLOODED BATTERY

Battery Type	Nominal Voltage V	Capacity (10Hr) Ah	Battery Size						Assembly Figure (As Per Cover Polarity)	Terminal Type	Weight W/O Add		Electrolyte		Total Weight for Battery	Regular Charge Current
			Dimensions-Millimeters (+.3mm)			Dimensions-Inches (+.1/16in)					Volume	Weight	Kg	A		
			L	W	H	L	W	H								
SLB14L-A2 (with sensor)	12	14	134	89	166	5 2/8	3 2/4	6 4/8		D	3.53	7.78	0.84	1.08	4.61	1.4
SLB14L-B2 (with sensor)	12	14	134	89	166	5 2/8	3 2/4	6 4/8		D	3.53	7.78	0.84	1.08	4.61	1.4
LB14A-A1	12	14	134	89	176	5 2/8	3 2/4	6 7/8		B	3.56	7.85	0.84	1.08	4.64	1.4
LB14A-A2	12	14	134	89	176	5 2/8	3 2/4	6 7/8		D	3.58	7.89	0.84	1.08	4.66	1.4
LB16-B	12	19	175	100	155	6 7/8	4	6 1/8		B	4.50	9.92	1.20	1.54	6.04	1.9
LB16L-B	12	19	175	100	155	6 7/8	4	6 1/8		B	4.50	9.92	1.20	1.54	6.04	1.9
LB16L-A2	12	19	175	100	155	6 7/8	4	6 1/8		B	4.50	9.92	1.20	1.54	6.04	1.9
LB16B-A	12	16	160	90	161	6 2/8	3 2/4	6 3/8		A	3.93	8.66	0.98	1.25	5.18	1.6
LB16B-A1	12	16	160	90	161	6 2/8	3 2/4	6 3/8		C	3.93	8.66	0.98	1.25	5.18	1.6
LB16B-A2	12	16	160	90	161	6 2/8	3 2/4	6 3/8		E	3.93	8.66	0.98	1.25	5.18	1.6
LB16AL-A2	12	16	207	71.5	164	8 1/8	2 3/4	6 4/8		F	4.05	8.93	1.13	1.45	5.50	1.6
HLE16A-A	12	16	151	91	180	6	3 2/4	7 1/8		C	4.05	8.93	0.91	1.16	5.21	1.6
/HLE16A-AB																
LB16C-B	12	19	175	100	175	6 7/8	4	6 7/8		A	4.57	10.07	1.20	1.54	6.11	1.9
LB16CL-B	12	19	175	100	175	6 7/8	4	6 7/8		A	4.57	10.07	1.20	1.54	6.11	1.9
L50-N18L-A	12	20	205	90	162	8 1/8	3 2/4	6 3/8		C	5.00	11.02	1.25	1.60	6.60	2.0
L50-N18L-A2	12	20	205	90	162	8 1/8	3 2/4	6 3/8		C	5.00	11.02	1.25	1.60	6.60	2.0
L50-N18L-A3	12	20	205	90	162	8 1/8	3 2/4	6 3/8		A	5.00	11.02	1.25	1.60	6.60	2.0
SL50-N18L-A (with sensor)	12	20	205	90	162	8 1/8	3 2/4	6 3/8		C	5.00	11.02	1.25	1.60	6.60	2.0
SL50-N18L-A2 (with sensor)	12	20	205	90	162	8 1/8	3 2/4	6 3/8		C	5.00	11.02	1.25	1.60	6.60	2.0
SL50-N18L-A3 (with sensor)	12	20	205	90	162	8 1/8	3 2/4	6 3/8		C	5.00	11.02	1.25	1.60	6.60	2.0
L50-N18A-A	12	20	205	90	176	8 1/8	3 2/4	6 7/8		C	5.00	11.02	1.25	1.60	6.60	2.0
LB18-A	12	18	180	90	162	7 1/8	3 2/4	6 3/8		C	4.32	9.52	1.23	1.57	5.89	1.8
LB18L-A	12	18	180	90	162	7 1/8	3 2/4	6 3/8		C	4.32	9.52	1.23	1.57	5.89	1.8
LB18L-A2	12	18	180	90	162	7 1/8	3 2/4	6 3/8		C	4.32	9.52	1.23	1.57	5.89	1.8
L60-N24-A	12	28	184	124	170	7 2/8	4 7/8	6 6/8		G	5.83	12.85	1.81	2.32	8.15	2.8
L60-N24L-A	12	28	184	124	170	7 2/8	4 7/8	6 6/8		G	5.83	12.85	1.81	2.32	8.15	2.8
L60-N24AL-B	12	28	184	124	170	7 2/8	4 7/8	6 6/8		G	5.83	12.85	1.81	2.32	8.15	2.8
L60-N28L-A	12	28	184	130	170	7 2/8	5 1/8	6 6/8		G	5.90	13.01	1.84	2.36	8.26	2.8
L60-N30L-A	12	30	184	130	170	7 2/8	5 1/8	6 6/8		G	6.35	14.00	1.84	2.36	8.71	3.0
L60-N30L-A/HD	12	30	184	130	170	7 2/8	5 1/8	6 6/8		G	6.35	14.00	1.84	2.36	8.71	3.0
L60-N30-A	12	30	184	130	170	7 2/8	5 1/8	6 6/8		G	6.35	14.00	1.84	2.36	8.71	3.0
L60-N30L-B	12	30	184	130	170	7 2/8	5 1/8	6 6/8		G	6.35	14.00	1.84	2.36	8.71	3.0
L60-N30L-A-1	12	24	184	130	165	7 2/8	5 1/8	6 4/8		G	5.25	11.57	1.81	2.32	7.57	2.4
LB30L-B	12	30	165	130	176	6 4/8	5 1/8	6 7/8		A	6.30	13.89	1.62	2.08	8.38	3.0
LB30CL-B	12	30	165	130	192	6 4/8	5 1/8	7 4/8		A	6.35	14.00	1.62	2.08	8.43	3.0
U1-5	12	12	195	130	180	7 5/8	5 1/8	7 1/8		G	3.65	8.05	2.10	2.69	6.34	1.2
U1R-5	12	12	195	130	180	7 5/8	5 1/8	7 1/8		G	3.65	8.05	2.10	2.69	6.34	1.2
U1-6	12	16	195	130	180	7 5/8	5 1/8	7 1/8		G	4.10	9.04	1.99	2.55	6.65	1.6
U1R-6	12	16	195	130	180	7 5/8	5 1/8	7 1/8		G	4.10	9.04	1.99	2.55	6.65	1.6
U1-7	12	18	195	130	180	7 5/8	5 1/8	7 1/8		G	4.52	9.96	1.95	2.50	7.02	1.8
U1R-7	12	18	195	130	180	7 5/8	5 1/8	7 1/8		G	4.52	9.96	1.95	2.50	7.02	1.8
U1-9	12	24	195	130	180	7 5/8	5 1/8	7 1/8		G	5.43	11.97	1.95	2.50	7.93	2.4
U1R-9	12	24	195	130	180	7 5/8	5 1/8	7 1/8		G	5.43	11.97	1.95	2.50	7.93	2.4
U1-11	12	30	195	130	180	7 5/8	5 1/8	7 1/8		G	6.37	14.04	1.85	2.37	8.74	3.0
U1R-11	12	30	195	130	180	7 5/8	5 1/8	7 1/8		G	6.37	14.04	1.85	2.37	8.74	3.0



CONVENTIONAL FLOODED BATTERY

Battery Type	Nominal Voltage V	Capacity (10Hr) Ah	Battery Size						Assembly Figure (As Per Cover Polarity)	Terminal Type	Weight W/O Add		Electrolyte		Total Weight for Battery	Regular Charge Current
			Dimensions-Millimeters (+.3mm)			Dimensions-Inches (+.1/16in)					Volume	Weight	Kg	A		
			L	W	H	L	W	H								
6N2-2A	6	2	70	47	96	2 5/8	1 3/4	3 5/8		/	0.42	0.93	0.12	0.15	0.57	0.2
6N2-2A-1	6	2	70	47	96	2 5/8	1 3/4	3 5/8		/	0.42	0.93	0.12	0.15	0.57	0.2
6N2-2A-2	6	2	70	47	96	2 5/8	1 3/4	3 5/8		/	0.42	0.93	0.12	0.15	0.57	0.2
6N2-2A-3	6	2	70	47	96	2 5/8	1 3/4	3 5/8		/	0.42	0.93	0.12	0.15	0.57	0.2
6N2-2A-4	6	2	70	47	96	2 5/8	1 3/4	3 5/8		/	0.42	0.93	0.12	0.15	0.57	0.2
6N2-2A-5	6	2	70	47	96	2 5/8	1 3/4	3 5/8		/	0.42	0.93	0.12	0.15	0.57	0.2
6N2-2A-6	6	2	70	47	96	2 5/8	1 3/4	3 5/8		/	0.42	0.93	0.12	0.15	0.57	0.2
6N2-2A-7	6	2	70	47	96	2 5/8	1 3/4	3 5/8		/	0.42	0.93	0.12	0.15	0.57	0.2
6N2-2A-8	6	2	70	47	96	2 5/8	1 3/4	3 5/8		/	0.42	0.93	0.12	0.15	0.57	0.2
6N2-2D	6	2	70	47	104	2 5/8	1 3/4	4 1/8		/	0.43	0.95	0.12	0.15	0.58	0.2
6N2A-2C	6	2	70	47	104	2 5/8	1 3/4	4 1/8		/	0.43	0.95	0.12	0.15	0.58	0.2
6N2A-2C-3	6	2	70	47	104	2 5/8	1 3/4	4 1/8		/	0.43	0.95	0.12	0.15	0.58	0.2
6N4-2A	6	4	71	71	96	2 5/8	2 3/4	3 5/8		/	0.63	1.39	0.18	0.23	0.86	0.4
6N4-2A-C1	6	4	71	71	96	2 5/8	2 3/4	3 5/8		/	0.63	1.39	0.18	0.23	0.86	0.4
6N4-2A-2	6	4	71	71	96	2 5/8	2 3/4	3 5/8		/	0.63	1.39	0.18	0.23	0.86	0.4
6N4-2A-3	6	4	71	71	96	2 5/8	2 3/4	3 5/8		/	0.63	1.39	0.18	0.23	0.86	0.4
6N4-2A-4	6	4	71	71	96	2 5/8	2 3/4	3 5/8		/	0.63	1.39	0.18	0.23	0.86	0.4
6N4-2A-5	6	4	71	71	96	2 5/8	2 3/4	3 5/8		/	0.63	1.39	0.18	0.23	0.86	0.4
6N4-2A-6	6	4	71	71	96	2 5/8	2 3/4	3 5/8		/	0.63	1.39	0.18	0.23	0.86	0.4
6N4-2A-7	6	4	71	71	96	2 5/8	2 3/4	3 5/8		/	0.63	1.39	0.18	0.23	0.86	0.4
6N4-2A-8	6	4	71	71	96	2 5/8	2 3/4	3 5/8		/	0.63	1.39	0.18	0.23	0.86	0.4
6N4-2A-UNV	6	4	71	71	96	2 5/8	2 3/4	3 5/8		/	0.63	1.39	0.18	0.23	0.86	0.4
6N4C-1B	6	4	71	71	105	2 5/8	2 3/4	4 1/8		/	0.65	1.43	0.18	0.23	0.88	0.4
6N4A-4D	6	4	61	57	130	2 3/8	2 1/4	5 1/8		/	0.70	1.54	0.17	0.22	0.92	0.4
6N4A-4D-1	6	4	61	57	130	2 3/8	2 1/4	5 1/8		/	0.70	1.54	0.17	0.22	0.92	0.4
6N4B-2A	6	4	102	48	96	4	2	3 5/8		/	0.62	1.37	0.19	0.25	0.87	0.4
6N4B-2A-1	6	4	102	48	96	4	2	3 5/8		/	0.62	1.37	0.19	0.25	0.87	0.4
6N4B-2A-2	6	4	102	48	96	4	2	3 5/8		/	0.62	1.37	0.19	0.25	0.87	0.4
6N4B-2A-3	6	4	102	48	96	4	2	3 5/8		/	0.62	1.37	0.19	0.25	0.87	0.4
6N4B-2A-4	6	4	102	48	96	4	2	3 5/8		/	0.62	1.37	0.19	0.25	0.87	0.4
6N4B-2A-5	6	4	102	48	96	4	2	3 5/8		/	0.62	1.37	0.19	0.25	0.87	0.4
6N5.5-3D	6	5.5	90	70	100	3 4/8	2 3/4	3 7/8		/	0.80	1.76	0.27	0.35	1.15	0.6
6N5.5-1D	6	5.5	90	70	100	3 4/8	2 3/4	3 7/8		/	0.80	1.76	0.27	0.35	1.15	0.6
6N5.5-1D-1	6	5.5	90	70	100	3 4/8	2 3/4	3 7/8		/	0.80	1.76	0.27	0.35	1.15	0.6
6N6-3B	6	6	99	57	111	3 7/8	2 1/4	4 3/8		B	0.84	1.85	0.26	0.33	1.17	0.6
6N6-3B-1	6	6	99	57	111	3 7/8	2 1/4	4 3/8		B	0.84	1.85	0.26	0.33	1.17	0.6
6N6-1D	6	6	99	57	111	3 7/8	2 1/4	4 3/8		/	0.83	1.83	0.26	0.33	1.16	0.6
6N6-1D-1	6	6	99	57	111	3 7/8	2 1/4	4 3/8		/	0.83	1.83	0.26	0.33	1.16	0.6
6N6-1D-2	6	6	99	57	111	3 7/8	2 1/4	4 3/8		/	0.83	1.83	0.26	0.33	1.16	0.6
6N6-1C	6	6	99	57	111	3 7/8	2 1/4	4 3/8		/	0.83	1.83	0.26	0.33	1.16	0.6
B39-6	6	7	126	48	126	5	2	5		B	0.97	2.14	0.35	0.45	1.42	0.7
B49-6	6	10	91	83	160	3 5/8	3 1/4	6 2/8		B	1.48	3.26	0.57	0.73	2.21	1.0
B38-6A	6	13	119	83	161	4 5/8	3 1/4	6 3/8		B	1.88	4.14	0.75	0.96	2.84	1.3
6N11-2D	6	11	150	70	100	5 7/8	2 3/4	3 7/8		B	1.42	3.13	0.42	0.54	1.96	1.1



CONVENTIONAL FLOODED BATTERY

Battery Type	Nominal Voltage V	Capacity (10Hr) Ah	Battery Size						Assembly Figure (As Per Cover Polarity)	Terminal Type	Weight W/O Acid		Electrolyte		Total Weight for Battery	Regular Charge Current
			Dimensions-Millimeters (+2mm)			Dimensions-Inches (+1/16in)					Kg	Lbs	Liters	Weight Kg		
			L	W	H	L	W	H								
6LB11-2D	6	11	150	70	100	5 7/8	2 3/4	3 7/8		B	1.42	3.13	0.42	0.54	1.96	1.1
6N11A-1B	6	11	122	62	131	4 6/8	2 2/4	5 1/8		B	1.45	3.20	0.48	0.61	2.06	1.1
6N11A-3	6	11	122	62	131	4 6/8	2 2/4	5 1/8		B	1.45	3.20	0.48	0.61	2.06	1.1
6N11A-4	6	11	122	62	131	4 6/8	2 2/4	5 1/8		B	1.45	3.20	0.48	0.61	2.06	1.1
6N11A-3A	6	11	122	62	131	4 6/8	2 2/4	5 1/8		B	1.45	3.20	0.48	0.61	2.06	1.1
6N11A-3B	6	11	122	62	131	4 6/8	2 2/4	5 1/8		B	1.45	3.20	0.48	0.61	2.06	1.1
6N11A-4A	6	11	122	62	131	4 6/8	2 2/4	5 1/8		B	1.45	3.20	0.48	0.61	2.06	1.1
B54-6	6	12	156	57	116	6 1/8	2 1/4	4 5/8		B	1.50	3.31	0.43	0.55	2.05	1.2
B54-6A	6	12	156	57	116	6 1/8	2 1/4	4 5/8		B	1.50	3.31	0.43	0.55	2.05	1.2
12N3-3A	12	3	98	56	110	3 7/8	2 1/4	4 3/8		B	0.95	2.09	0.23	0.29	1.24	0.3
12N4-3B	12	4	120	70	92	4 6/8	2 3/4	3 5/8		A	1.23	2.71	0.27	0.35	1.58	0.4
12N5-3B	12	5	120	61	130	4 6/8	2 2/4	5 1/8		B	1.59	3.51	0.37	0.47	2.06	0.5
12N5-3B-2	12	5	120	61	130	4 6/8	2 2/4	5 1/8		A	1.60	3.53	0.37	0.47	2.07	0.5
12N5-4B	12	5	120	61	130	4 6/8	2 2/4	5 1/8		B	1.59	3.51	0.37	0.47	2.06	0.5
12N5.5-3B	12	5.5	135	60	130	5 3/8	2 1/4	5 1/8		B	1.60	3.53	0.43	0.55	2.15	0.6
12N5.5-4A	12	5.5	135	60	130	5 3/8	2 1/4	5 1/8		F	1.60	3.53	0.43	0.55	2.15	0.6
12N5.5-4A-1	12	5.5	135	60	130	5 3/8	2 1/4	5 1/8		B	1.60	3.53	0.43	0.55	2.15	0.6
12N5.5-4B	12	5.5	135	60	130	5 3/8	2 1/4	5 1/8		B	1.60	3.53	0.43	0.55	2.15	0.6
12N5.5A-3B	12	5.5	103	90	114	4	3 2/4	4 4/8		B	1.60	3.53	0.48	0.61	2.21	0.6
12N6-3B	12	6	137	72	95	5 3/8	2 3/4	3 6/8		B	1.59	3.51	0.34	0.44	2.03	0.6
12N6-4B	12	6	137	72	95	5 3/8	2 3/4	3 6/8		B	1.59	3.51	0.34	0.44	2.03	0.6
12N6.5-3B	12	6.5	138	73	107	5 3/8	2 3/4	4 2/8		B	1.80	3.97	0.40	0.51	2.31	0.7
12N6.5B-4B	12	7	150	87	95	5 7/8	3 2/4	3 6/8		D	1.93	4.25	0.48	0.61	2.54	0.7
12N7E-B	12	7	150	87	95	5 7/8	3 2/4	3 6/8		A	1.93	4.25	0.48	0.61	2.54	0.7
12N7-3A	12	7	135	75	133	5 3/8	3	5 2/8		B	2.10	4.63	0.56	0.72	2.82	0.7
12N7-3A2	12	7	135	75	133	5 3/8	3	5 2/8		A	2.12	4.67	0.56	0.72	2.84	0.7
12N7-3B	12	7	135	75	133	5 3/8	3	5 2/8		B	2.10	4.63	0.56	0.72	2.82	0.7
12N7-3B2	12	7	135	75	133	5 3/8	3	5 2/8		A	2.12	4.67	0.56	0.72	2.84	0.7
12N7-4A	12	7	135	75	133	5 3/8	3	5 2/8		B	2.10	4.63	0.56	0.72	2.82	0.7
12N7-4A2	12	7	135	75	133	5 3/8	3	5 2/8		A	2.12	4.67	0.56	0.72	2.84	0.7
12N7-4B	12	7	135	75	133	5 3/8	3	5 2/8		B	2.10	4.63	0.56	0.72	2.82	0.7
12N7D-3B	12	7	135	75	150	5 3/8	3	5 7/8		B	2.12	4.67	0.56	0.72	2.84	0.7
12N7A-3A	12	7	150	60	130	5 7/8	2 1/4	5 1/8		B	2.00	4.41	0.49	0.63	2.63	0.7
12N7B-3A	12	7	150	60	130	5 7/8	2 1/4	5 1/8		B	2.00	4.41	0.49	0.63	2.63	0.7
12N7A-4A	12	7	135	75	133	5 3/8	3	5 2/8		B	1.90	4.19	0.56	0.72	2.62	0.7
12N7B-4A	12	7	135	75	133	5 3/8	3	5 2/8		B	1.90	4.19	0.56	0.72	2.62	0.7
12N7-4A(J)	12	7	135	75	133	5 3/8	3	5 2/8		B	1.90	4.19	0.56	0.72	2.62	0.7
12N7B-3B	12	7	150	60	130	5 7/8	2 1/4	5 1/8		B	2.00	4.41	0.49	0.63	2.63	0.7
12N7B-4B	12	7	150	60	130	5 7/8	2 1/4	5 1/8		B	2.00	4.41	0.49	0.63	2.63	0.7
12N7C-3D	12	7	130	90	114	5 1/8	3 2/4	4 4/8		E	2.10	4.63	0.58	0.74	2.84	0.7
12N9-3A	12	9	135	75	139	5 3/8	3	5 4/8		B	2.27	5.00	0.56	0.72	2.99	0.9
12N9-3A-1	12	9	135	75	139	5 3/8	3	5 4/8		B	2.27	5.00	0.56	0.72	2.99	0.9



CONVENTIONAL FLOODED BATTERY

Battery Type	Nominal Voltage V	Capacity (10Hr) Ah	Battery Size						Assembly Figure (As Per Cover Polarity)	Terminal Type	Weight W/O Acid		Electrolyte		Total Weight for Battery	Regular Charge Current
			Dimensions-Millimeters (+2mm)			Dimensions-Inches (+1/16in)					Kg	Lbs	Liters	Kg		
			L	W	H	L	W	H								
12N9-3B	12	9	135	75	139	5 3/8	3	5 4/8		B	2.27	5.00	0.56	0.72	2.99	0.9
12N9-4B-1	12	9	135	75	139	5 3/8	3	5 4/8		B	2.27	5.00	0.56	0.72	2.99	0.9
12N10-3A	12	10	134	89	145	5 2/8	3 2/4	5 6/8		B	2.58	5.69	0.72	0.92	3.50	1.0
12N10-3A-1	12	10	134	89	145	5 2/8	3 2/4	5 6/8		B	2.58	5.69	0.72	0.92	3.50	1.0
12N10-3A-2	12	10	134	89	145	5 2/8	3 2/4	5 6/8		D	2.58	5.69	0.72	0.92	3.50	1.0
12N10-3B	12	10	134	89	145	5 2/8	3 2/4	5 6/8		B	2.58	5.69	0.72	0.92	3.50	1.0
12N10-3B-1	12	10	134	89	145	5 2/8	3 2/4	5 6/8		A	2.58	5.69	0.72	0.92	3.50	1.0
12N12A-4A-1	12	12	134	81	160	5 2/8	3 1/4	6 2/8		B	3.16	6.97	0.70	0.90	4.06	1.2
12N12A-4A-1(J)	12	12	134	81	160	5 2/8	3 1/4	6 2/8		B	2.88	6.35	0.72	0.92	3.80	1.2
12N14-3A	12	14	134	89	166	5 2/8	3 2/4	6 4/8		B	3.25	7.16	0.84	1.08	4.33	1.4
12N14-3B	12	14	134	89	166	5 2/8	3 2/4	6 4/8		D	3.25	7.16	0.84	1.08	4.33	1.4
12N14-3A2	12	14	134	89	166	5 2/8	3 2/4	6 4/8		D	3.25	7.16	0.84	1.08	4.33	1.4
12N16-3A	12	16	175	100	155	6 7/8	4	6 1/8		B	3.85	8.49	1.24	1.59	5.44	1.6
12N16-3B	12	16	175	100	155	6 7/8	4	6 1/8		B	3.85	8.49	1.24	1.59	5.44	1.6
12N16-4B	12	16	175	100	155	7	3 7/8	6		B	3.85	8.49	1.24	1.59	5.44	1.6
12C16A-3A	12	19	186	82	171	7 1/4	3 2/8	6 3/4		G	4.57	10.07	1.04	1.33	5.90	1.9
12C16A-3B	12	19	186	82	171	7 1/4	3 2/8	6 3/4		G	4.57	10.07	1.04	1.33	5.90	1.9
12N18-3	12	18	205	90	162	8	3 4/8	6 2/4		B	4.30	9.48	1.25	1.60	5.90	1.8
12N18-3-1	12	18	205	90	162	8	3 4/8	6 2/4		C	4.35	9.59	1.25	1.60	5.95	1.8
12N18-3A	12	18	205	90	162	8	3 4/8	6 2/4		C	4.35	9.59	1.25	1.60	5.95	1.8
12N18-4A	12	18	205	90	162	8	3 4/8	6 2/4		C	4.35	9.59	1.25	1.60	5.95	1.8
12N18-3B	12	18	205	90	162	8	3 4/8	6 2/4		C	4.35	9.59	1.25	1.60	5.95	1.8
12N24-3	12	24	184	124	175	7 1/4	4 7/8	7		G	5.33	11.75	1.82	2.33	7.66	2.4
12N24-4	12	24	184	124	175	7 1/4	4 7/8	7		G	5.33	11.75	1.82	2.33	7.66	2.4
12N24-3A	12	24	184	124	175	7 1/4	4 7/8	7		G	5.33	11.75	1.82	2.33	7.66	2.4
12N24-4A	12	24	184	124	175	7 1/4	4 7/8	7		G	5.33	11.75	1.82	2.33	7.66	2.4
CHD4-12	12	28	205	130	165	8 1/8	5 1/8	6 4/8		H	6.03	13.29	2.06	2.63	8.66	2.8





BATTERY SUPPLIER CROSS REFERENCE

■ Maintenance Free Battery

Model	Engelizer	Deka	Champion	Power-Sonic	GS (JSB)	Napa	GS (ZYI)	Wal-Mart	Yacht	Motocross	Yuasa	Sears
LT4B-BS	-	-	-	PTX4B-BS	-	-	-	-	-	M62T4B	YT4B-BS	44150
LTR4A-BS	-	-	-	PTX4A-BS	GTR4A-5	-	-	-	-	M62R4A	YTR4A-BS	44151
LTX4L-BS/EBX4L-BS	02077610	-	4LBS	PTX4L-BS	GT4L-BS	740-1865	GTX4L-BS	-	CT4L-BS CTX4L-BS	M62X4B	YTX4L-BS	44015
LTX5L-BS/EBX5L-BS	-	-	5LBS	PTX5L-BS	GTX5L-BS	740-1830	GTX5L-BS	-	CT5L-BS CTX5L-BS	M32X5B	YTX5L-BS	44022
EB25-3	-	-	-	PT25S	GT25S	-	-	-	-	-	-	-
LTZ7-3/EBZ7-3	-	-	-	PTZ7S	GTZ7S	-	-	-	CTZ7S	M727S	YTZ7S	44200
LTX7L-BS/EBX7L-BS	-	-	-	PTX7L-BS	GTX7L-BS	-	GTX7L-BS	-	CTX7L-BS	M327BS	YTX7L-BS	44024
LTX7A-BS/EBX7A-BS	-	-	-	PTX7A-BS	GTX7A-BS	-	GTX7A-BS	-	CTX7A-BS	M327A	YTX7A-BS	44023
LT7B-4/EB7B-4	-	-	-	PT7B-4	GT7B-4	-	-	-	CT7B-4	M627B	YT7B-BS	44153
LTX9-BS/EBX9-BS/MX9-4	02420400	ETX9	9BS	PTX9-BS	GTX9-BS	740-1825	GTX9-BS	ES9BS	CTX9-BS	M329BS/M429BS	YTX9-BS	44025
LT9B-4/EB9B-4	-	-	-	PT9B-4	GT9B-4	-	-	-	CT9B-4	M729B4	YT9B-4	44206
LTZ10-4/EBZ10A-4	-	-	-	PTZ10S	GTZ10S	-	-	-	CTZ10S	M7210A	YTZ10S	44210
EB12A-BS	-	-	-	PTX12A-BS	-	-	-	-	CT12A-BS	M32ABS	YT12A-BS	-
LTX12-BS/EBX12-BS/MX12-4	02078210	ETX12	12BS	PTX12-BS	GTX12-BS	740-1866	GTX12-BS	ES12BS	CTX12-BS	M3RH2S/M4RH2S	YTX12-BS	44016
LT12B-4/EB12B-4	-	-	-	PT12B-4	GT12B-4	-	-	-	CT12B-4	M6212B	YT12B-BS	44159
LTZ12-4/EBZ12A-4	-	-	-	PTZ12S	GTZ12S	-	-	-	CTZ12S	M7212A	YTZ12S	44215
LTX14-BS/EBX14-BS/MX14-4	02420500	ETX14	14BS	PTX14-BS	-	740-1886	GTX14-BS	ES14BS	CTX14-BS	M3RH4S/M4RH4S	YTX14-BS	44017
LTX14L-BS/EBX14L-BS/MX14-3	-	-	-	PTX14L-BS	-	-	-	-	-	-	YTX14L-BS	-
LTX14AH-BS/EBX14AH-BS/MX15-4	-	ETX15	-	PTX14AH-BS	-	-	GT14-BS	-	-	M62H4A/M72H4A	YTX14AH-BS	44004
LTX14HL-BS/EBX14HL-BS/MX15-3	-	ETX15L	-	PTX14HL-BS	-	-	GT14L-BS	-	-	M62H4L/M72H4L	YTX14HL-BS	44005
LT14B-4/EB14B-4	-	-	-	PT14B-4	GT14B-4	-	-	-	CT14B-4	M724B4	YT14B-4	44220
LTZ14-4/EBZ14A-4/EBZ14-4	-	-	-	PTZ14S	GTZ14S	-	-	-	CTZ14S	M7214	YTZ14S	44217
LTX15L-BS/EBX15L-BS	-	-	-	PTX15L-BS	-	-	-	-	CTX15L-BS	M6215L	YTX15L-BS	44162
LTX16-BS/EBX16-BS	-	-	-	PTX16-BS	-	-	-	-	CTX16-BS	M32X6S	YTX16-BS	44020
LTX16-BS-1	-	-	-	PTX16-BS-1	-	-	-	-	CTX16-BS-1	M32X61	YTX16-BS-1	44019
LT16CL-BS	-	ETX16L	-	PTX19CL-BS	-	-	GT16L-BS	-	-	-	-	-
EB16B-BS/MX16-4	-	ETX16	-	PTX19-BS	-	740-1887	GT16-BS	-	CTX19-BS	-	-	-
EB16BL-BS/MX16-3	-	ETX16L	-	PTX19L-BS	-	740-1888	GT16L-BS	-	CTX19L-BS	-	-	-
LTX18L-BS/EBX18L-BS	-	ETX18L	-	PTX18L-BS	-	740-1889	GTX18L-BS	-	CTX18L-BS	-	-	44006
LTX20-BS/EBX20-BS	-	-	-	PTX20-BS	-	740-1824	GTX20-BS	-	CTX20-BS	M32RBS/M42RBS	YTX20-BS	44028
LTX20L-BS/EBX20L-BS	-	ETX20L	20L-BS	PTX20L-BS	-	740-1890	GTX20L-BS	ES20LBS	CTX20L-BS	M320BS/M4220BS	YTX20L-BS	44027
LTX24H-BS/EBX24H-BS	-	-	-	PDX50-BS	-	-	-	-	CTX18-BS	-	-	-
LTX24HL-BS/EBX24HL-BS/MX16-3	-	ETX18L	-	PDX50L-BS	-	740-1889	GTX18L-BS	-	CTX18L-BS	M6250H/M7250H	YTX24HL-BS	44006
EBX30L-BS	-	-	-	PDX30L-BS	-	-	-	-	CTX30L	M7230L	YTX30L	-



BATTERY SUPPLIER CROSS REFERENCE

■ High Performance Flooded Battery

Model	Engelizer	Deka	Champion	Power-Sonic	GS (JSB)	Napa	GS (ZYI)	Wal-Mart	Yacht	Motocross	Yuasa	Sears
LB2.5L-C	-	-	-	CB2.5L-C	GM2.5A-3C-3	-	CB2.5L-C	-	CB2.5L-C	M225L-C/M325L-C	YB2.5L-C	44035
LB2.5L-C-1	-	-	-	CB2.5L-C-1	GM2.5A-3C-1	-	CB2.5L-C-1	-	CB2.5L-C-1	M22L-C1/M32L-C1	YB2.5L-C-1	44036
LB3L-A	-	-	-	CB3L-A	GM3-3A	-	CB3L-A	-	CB3L-A	M223L-A/M323L-A	YB3L-A	44037
LB3L-B	-	-	-	CB3L-B	GM3-3B	-	CB3L-B	-	CB3L-B	M223L-B	YB3L-B	44038
LB4L-A	-	-	-	CB4L-A	GM4A-3B	-	CB4L-A	-	CB4L-A	M224L-A	YB4L-A	44039
LB4L-B	-	-	4LB	CB4L-B	GM4-3B	740-1861	CB4L-B	-	CB4L-B	M224L-B/M324L-B	YB4L-B	44014
LB5L-B	02420300	-	-	CB5L-B	GM5Z-3B	740-1868	CB5L-B	-	CB5L-B	M225L-B/M325L-B	YB5L-B	44353
LB7A	-	-	-	CB7A	GM7Z-4A	-	CB7A	-	CB7A	M227A	YB7A	44040
LB7C-A	-	-	-	CB7C-A	GM7CZ-3D	-	-	-	CB7C-A	M227C	YB7C-A	44041
LB7L-B	-	-	-	CB7L-B	GM7-3B-1	-	CB7L-B	-	CB7L-B	M2273Y	YB7L-B	44042
LB9-B	02071980	-	-	CB9-B	GM9Z-4B	740-1858	CB9-B	-	CB9-B	M229B/M329B	YB9-B	44356
LB9L-B	-	-	9LB	CB9L-B	GM9Z-3B	740-1837	CB9L-B	-	CB9L-B	M229L/M329L	YB9L-B	44045
LB9A-A	-	-	9AA	CB9A-A	GM9AZ-4A	740-1872	CB9A-A	-	CB9A-A	M229A/M329A	YB9A-A	44043
LB9L-A1	-	-	-	CB9L-A2	-	-	CB9L-A2	-	CB9L-A2	M2292Y	YB9L-A2	44044
LB10A-A2	-	-	-	CB10A-A2	-	740-1842	CB10A-A2	-	CB10A-A2	M221AY/M321AY	YB10A-A2	44046
LB10L-A2	02073210	-	10LA2	CB10L-A2	GM10Z-3A	740-1857	CB10L-A2	ES10LA2	CB10L-A2	M2210Y/M3210Y	YB10L-A2	44355
LB10L-B2	-	-	-	CB10L-B2	-	-	CB10L-B2	-	CB10L-B2	M221L2	YB10L-B2	44048
LB10L-B	-	-	-	CB10L-B	GM10-3B	740-1831	CB10L-B	-	CB10L-B	M221LB/M321LB	YB10L-B	44047
LB12A-A	02074490	-	12AA	CB12A-A	GM12AZ-4A-1	740-1854	CB12A-A	ES12AA	CB12A-A	M2212Y/M3212Y	YB12A-A	44358
LB12A-B	-	-	-	CB12A-B	-	-	CB12A-B	-	CB12A-B	M222AB	YB12A-B	44053
LB12AL-A	-	-	12ALA	CB12AL-A	GM12AZ-3A-1	740-1873	CB12AL-A	-	CB12AL-A	M2221Y/M3221Y	YB12AL-A	44052
LB12AL-A2	-	-	-	CB12AL-A2	-	-	CB12AL-A2	-	CB12AL-A2	M22212	YB12AL-A2	-
LB12B-B2	-	-	-	CB12B-B2	GM12B-4B	-	CB12B-B2	-	CB12B-B2	M221B2	YB12B-B2	44054
LB12C-A	-	-	-	CB12C-A	GM12CZ-4A-2	740-1823	CB12C-A	-	CB12C-A	M222CA	YB12C-A	44055
LB14-A2	02074520	-	-	CB14-A2	GM14Z-4A	740-1864	CB14-A2	-	CB14-A2	M2214H/M3214H	YB14-A2	44363
LB14A-A1	-	-	14AA1	CB14A-A	GM14AZ-4A	740-1826	CB14A-A	-	CB14A-A	M224A1/M324A1	YB14A-A1	44056
LB14A-A2	02074650	-	14AA2	CB14A-A2	GM14AZ-4A-1	740-1860	CB14A-A2	ES14AA2	CB14A-A2	M2214A/M3214A	YB14A-A2	44361
LB14L-A1	-	-	-	CB14L-A1	GM14Z-3A-1	-	CB14L-A1	-	CB14L-A1	M22141	YB14L-A1	44057
LB14L-A2	02074780	-	14LA2	CB14L-A2	GM14Z-3A	740-1851	CB14L-A2	ES14LA2	CB14L-A2	M2214Y/M3214Y	YB14L-A2	44364
LB14L-B2	-	-	-	CB14L-B2	GM14Z-3B	740-1828	CB14L-B2	-	CB14L-B2	M2214B	YB14L-B2	44059
LB14-B2	-	-	-	CB14-B2	-	-	CB14-B2	-	CB14-B2	M224B2	YB14-B2	44060
SLB14L-A2	-	-	-	SCB14L-A2	-	-	SCB14L-A2	-	SCB14L-A2	M2214S	YB14L-A2	44061
SLB14L-B2	-	-	-	SCB14L-B2	-	-	SCB14L-B2	-	SCB14L-B2	M224S	YB14L-B2	44062
LB16AL-A2	-	-	16ALA2	CB16AL-A2	GM16A-3A	740-1877	CB16AL-A2	-	CB16AL-A2	M2216Z/M3216Z	YB16AL-A2	44063
HLB16A-A	-	-	16AA	HCB16A-A	GM16-T	740-1867	HCB16A-A	-	HCB16A-A	M22H6B/M32H6B	YB16A-A	44064
LB16-B	02074940	-	16B	CB16-B	GM16Z-4BH	740-1852	CB16-B	ES16B	CB16-B	M2216Y/M3216Y	YB16-B	44366
LB16L-B	-	-	16LB	CB16L-B	GM16Z-3B	740-1827	CB16L-B	-	CB16L-B	M2216K/M3216K	YB16L-B	44065
LB16L-A2	02420600	-	-	CB16L-A2	GM16L-A2	-	CB16L-A2	-	CB16L-A2	M2216C/M3216C	YB16L-A2	44369
LB16B-A	-	-	-	CB16B-A	GM16B-4A	-	CB16B-A	-	CB16B-A	M2216B	YB16B-A	44066
LB16B-A1	-	-	-	CB16B-A1	-	-	CB16B-A1	-	CB16B-A1	M22161	YB16B-A1	44067
LB16CL-B	02077580	-	16CLB	CB16CL-B	GM16AZ-3B	740-1862	CB16CL-B	ES16CLB	CB16CL-B	M22S6CL/M32S6CL	YB16CL-B	44001
LB18-A	-	-	-	CB18-A	GM18A-4A	740-1874	CB18-A	-	CB18-A	M2281Y/M3281Y	YB18-A	44070
LB18L-A	-	-	18LA	CB18L-A	GM18A-3A	740-1871	CB18L-A	-	CB18L-A	M2218L/M3218L	YB18L-A	44071
L50-N18A-A	-	-	-	C50-N18A-A	-	-	-	-	C50-N18A-A	M228AY	Y50-N18A-A	44072
L50-N18LA-A3	02420200	-	18LA2	C50-N18LA-A3	GM18Z-3A(S)	740-1855	C50-N18LA-A3	ES50N18LA3	C50-N18LA-A3	M2218Y/M3218Y	Y50-N18LA-A	44359
12C16A-3B	-	-	-	51814	-	-	-	-	-	M2219B	51814	-
12C16A-3A	-	-	-	51913	-	-	-	-	-	M2219A	51913	-
L50-N18LA-A	-	-	-	C50-N18LA-A	GM18L-A2	-	-	-	C50-N18LA-A	M2218C/M3218C	Y50-N18LA-A	44030
SL50N18LA-A	-	-	-	SC50-N18LA-A	-	740-1878	-	-	SC50-N18LA-A	M2258T	Y50N18LA-A	44073



BATTERY SUPPLIER CROSS REFERENCE

High Performance Flooded Battery

Model	Energizer	Deka	Champion	Power-Sonic	GS (JSB)	Napa	GS (ZYI)	Wal-Mart	Yacht	Motocross	Yuasa	Sears
L60-N24-A	-	-	-	C60-N24-A	-	-	-	-	C60-N24-A	M2224A	Y60-N24-A	44074
L60-N24L-A	-	-	-	C60-N24L-A	-	740-1880	C60-N24AL-A	-	C60-N24L-A	-	-	-
L60-N24AL-B	-	-	-	C60-N24AL-B	-	-	-	-	C60-N24AL-B	M2224B	Y60-N24AL-B	44075
LB30L-B	-	-	-	CB30L-B	-	-	-	-	CB30L-B	M22H30	YB30L-B	44033
LB30CL-B	-	-	-	CB30CL-B	-	-	-	-	M2230C	YB30CL-B	-	-
L60-N30L-A	-	-	-	53030	-	-	-	-	C60-N30L-A	M2230B	53030	-

Conventional Flooded Battery

Model	Energizer	Deka	Champion	Power-Sonic	GS (JSB)	Napa	GS (ZYI)	Wal-Mart	Yacht	Motocross	Yuasa	Sears
12N5-3B	-	-	-	12N5-3B	12N5-3B	740-1883	12N5-3B	-	12N5-3B	M2253B/ M3253B	12N5-3B	44079
12N5-4B	-	-	54B	12N5-4B	-	740-1876	12N5-4B	-	12N5-4B	M2250B/ M3250B	12N5-4B	44080
12N5.5-4A	-	-	-	12N5.5-4A	-	-	12N5.5-4A	-	12N5.5-4A	M2254A/ M3254A	12N5.5-4A	44082
12N5.5-3B	-	-	-	12N5.5-3B	12N5.5-3B	-	12N5.5-3B	-	12N5.5-3B	M2255B/ M3255B	12N5.5-3B	44081
12N5.5A-3B	-	-	55A3B	12N5.5A-3B	12N5.5A-3B	740-1875	12N5.5A-3B	-	12N5.5A-3B	M22A5B/ M32A5B	12N5.5A-3B	44083
12N7-3B	-	-	73B	12N7-3B	12N7-3B	740-1881	12N7-3B	-	12N7-3B	M2273B/ M3273B	12N7-3B	44084
12N7-4A	-	-	74A	12N7-4A	12N7-4A	740-1870	12N7-4A	-	12N7-4A	M2274A/ M3274A	12N7-4A	44085
12N7-4B	-	-	-	12N7-4B	12N7-4B	740-1882	12N7-4B	-	12N7-4B	M2270B/ M3270B	12N7-4B	44086
12N7D-3B	-	-	-	12N7D-3B	12N7D-3B	-	12N7D-3B	-	12N7D-3B	M2270B	12N7D-3B	44087
12N9-3B	-	-	-	12N9-3B	12N9-3B	-	12N9-3B	-	12N9-3B	M2293B/ M3293B	12N9-3B	44090
12N9-3A-1	-	-	-	12N9-3A-1	-	-	12N9-3A-1	-	12N9-3A-1	M22931	12N9-3A-1	44089
12N9-4B-1	-	-	94B1	12N9-4B-1	12N9-4B-1	740-1869	12N9-4B-1	ES12N94B1	12N9-4B-1	M2290B/ M3290B	12N9-4B-1	-
12N10-3A	-	-	-	12N10-3A	12N10-3A	-	-	-	12N10-3A	M2210A	12N10-3A	44092
12N10-3A-1	-	-	-	12N10-3A-1	-	-	-	-	12N10-3A-1	M22101	12N10-3A-1	44093
12N11-3A-1	-	-	-	12N11-3A-1	12N11-3A-1	-	-	-	12N11-3A-1	M2211B/ M3211B	12N11-3A-1	44096
12N12A-4A-1	-	-	12A4A1	12N12A-4A-1	12N12A-4A-1	740-1853	12N12A-4A-1	-	12N12A-4A-1	M2221B/ M3221B	12N12A-4A-1	-
12N14-3A2	-	-	143A	12N14-3A	12N14-3A	740-1856	12N14-3A	-	12N14-3A	M2241B/ M3241B	12N14-3A	-
12N24-3	-	-	-	12N24-3	2N24-3	-	-	-	12N24-3	M2224D	12N24-3	44102
CHD4-12	-	-	H12	CHD4-12	GM32-4A	740-1859	CHD4-12	-	CHD4-12	M22H12/ M32H12	YHD-12	44357



BATTERY CROSS REFERENCE CHART

Factory Activated Maintenance Free	Dry Charged MAINTENANCE FREE UPGRADE	Dry Charged Maintenance Free	High Performance Flooded	Conventional Flooded
LT4-3/EB4-3	-	LTX4L-BS/EBX4L-BS	LB4L-A/LB4L-B	-
LT5A-3-1	-	LT5AL-BS	LB5L-B	12N5-3B
LT5-3/EB5-3	-	LTX5L-BS/EBX5L-BS	-	-
-	-	-	LB7L-B	12N7-3B
-	-	-	LB7A	12N7-4A
LT7A-4/EB7A-4	-	LTX7A-BS/EBX7A-BS	-	-
LT7-3/EB7-3	-	LTX7L-BS/EBX7L-BS	-	-
LT9A-4	-	LT9A-BS	LB9-B	12N9-4B-1
-	-	-	LB9L-B	12N9-3B
-	-	-	LB9L-A1	12N9-3A-1
LT9-4/EB9-4	-	LTX9-BS/EBX9-BS	-	-
-	-	-	LB12A-A	12N12A-4A-1
LT12-4/EB12-4/MX12-4	-	LTX12-BS/EBX12-BS	-	-
LT14A-4/EB14A-4/MX15-4	-	LTX14AH-BS/EBX14AH-BS	LB14-A2/LB14-B2 LB14A-A1/LB14A-A2	-
LT14A-3/EB14A-3/MX15-3	-	LTX14HL-BS/EBX14HL-BS	LB14L-A2/LB14L-B2 SLB14L-A2/SLB14L-B2	12N14-3A2
LT14-4/EB14C-4	-	LTX14L-BS/EBX14L-BS	-	-
LT14-3/EB14C-3	-	LTX14L-BS/EBX14L-BS	-	-
LT15-3/EB15-3	-	LTX15L-BS/EBX15L-BS	-	-
LT20CH-4/EB20CH-4	-	LTX20CH-BS/EBX20CH-BS	-	-
EB16B-4/MX16-4	-	EB16B-BS	LB16-B	-
EB16B-3/MX16-3	-	EB16BL-BS	LB16L-B	-
LT16C-3	-	LT16CL-BS	LB16CL-B	-
LT20-4/EB20-4	-	LTX20-BS/EBX20-BS	LB18-A	-
LT20-3/EB20-3	-	LTX20L-BS/EBX20L-BS	LB18L-A	-
EB20P-3	-	EBX20PL-BS	12C16A-3A	-
LT24-4/EB24-4	-	LTX24H-BS/EBX24H-BS	L50-N18A-A	-
LT24-3/EB24-3/MX18-3	-	LTX24HL-BS/EBX24HL-BS	L50-N18L-A3/SL50-N18L-A1	-
LT30-3/EB30-3/MX30-3	-	EBX30L-BS	LB30L-B/L60-N24AL-B/L60-N30L-A	-





MOTORCYCLE BATTERY APPLICATIONS

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded	CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
BUELL							HARLEY-DAVIDSON						
1200	X1 Lightning	99-02	-	LT20-3/EB20-3	-	-		FLST (Softail)	91-96	MX16-3	EB16B-3	EB16BL-BS	"LB16L-A2
	S1 Lightning	96-99	MX14-4	LT14-4	LT14-4-BS	"LB16-B		FXST, FLST	84-90	MX16-4	EB16B-4	EB16B-BS	"LB16-B
				EB14C-4*	EBX14-BS*	-		FL, FLH (Touring)	80-95	MX18-3	LT24-3	LT24-4-BS	-
	S3, S3T	97-02	-	"LT20-3"	LT20-3-BS	-		FL, FLH (Touring)	97-98	MX30-3	EB24-3	EBX24-4-BS	-
	Thunderbolt			EB20-3	EBX20-BS	-		VRSC V-Rod	78-84	-	-	-	-
	M2 Cyclone	97-02	-	LT20-3	LT20-3-BS	"LB16-B	1290	VRSC V-Rod	08-09	-	LT20-3/EB20-3	-	CHD4-12
				EB20-3	EBX20-BS	"LB16-B	1200	XL, XLH (Sportster)	04-09	MX14-3	LT14-3	LT14-4-BS	-
	S2, S2T Thunderbolt	94-96	MX16-4	EB16B-4	EB16B-BS	"LB16-B				EB14C-3	EBX14-BS	-	
	RR1200	88-90	MX16-4	EB16B-4	EB16B-BS	"LB16-B		XL, XLH (Sportster)	97-03	-	LT20-3	LT20-3-BS	-
	RS1200	89-93	MX16-4	EB16B-4	EB16B-BS	"LB16-B				EB20-3	EBX20-BS	-	
	RS51200	91-93	MX16-4	EB16B-4	EB16B-BS	"LB16-B		XL, XLH (Sportster)	87-95	MX16-4	EB16B-4	EB16B-BS	"LB16-B
	XB12R Fire bolt,	04-10	MX14-4	LT14-4	-	-		FX (Electric Start)	71-78	MX16-4	EB16B-4	EB16B-BS	"LB16-B
	XB12S Lightning			EB14C-4	-	-		FX (Kick Start)	71-72	-	-	-	"LB7-A
	XB12X Ulysses	06-10	MX14-4	LT14-4/EB14C-4	-	-				-	-	-	12N7-4A
1125	1125R	08-10	MX14-4	LT14-4/EB14C-4	-	-				-	-	-	
1000	RR1000	87	MX16-4	EB16B-4	EB16B-BS	-	1130	VRSC (V-Rod)	02-07	MX14-4	LT14-4/EB14C-4	-	
984	XB9R Firebolt,	02-10	MX14-4	LT14-4/EB14C-4	-	-	1100	XL Series (Sportster)	87-93	MX16-4	EB16B-4	EB16B-BS	"LB16-B
	XB9S Lightning			-	-	-	1000	XL Series (Sportster)	79-85	MX16-4	EB16B-4	EB16B-BS	"LB16-B
500	Blast	09-09	MX14-4	LT14-4	LT14-4-BS	-		XLCH Series (Sportster)	70-78	-	-	-	"LB7-A
				EB14C-4	EBX14-BS	-		XL CR Car - Racer	77-78	MX16-4	EB16B-4	EB16B-BS	CHD4-12
CANNONDALE								XLH (Sportster)	67-78	-	-	-	"LB16-B
440	C40, E440, X440, X440S	02-03	-	EB27-3	-	-	883	XLX-41, XR1000	83-85	MX16-4	EB16B-4	EB16B-BS	"LB16-B
	EX400, MX400, XC400	00-01	-	EB27-3	LT20-3-BS	-		XL, XLH (Sportster)	04-14	MX14-3	LT14-3	LT14-4-BS	-
				-	EBX20-BS	-				EB14C-3	EBX14-BS	-	
				-	EBX20-BS	-		XL, XLH (Sportster)	97-	-	LT20-3	LT20-3-BS	-
1395	SuperX	99-00	-	LT20-3/EB20-3	LT20-3-BS	-		XLH (Sportster)	86-95	MX16-4	EB16B-4	EB16B-BS	"LB16-B
				-	EBX20-BS	-	500	MT500 (Military)	A8	MX15-3	LT14A-3	LT14A-4-BS	"LB14L-A2
HARLEY-DAVIDSON										EB14A-3	EBX14A-BS	-	
1893	CVO FL (Touring)	07-15	MX30-3	LT30-3/EB30-3	EBX30-BS	-	360	SS360	All	-	-	-	6N11A-1B
	CVO FXD Fat Bob (Dyna)	07-15	-	LT20-3	LT20-3-BS	-	250	SS250, SX250	75-78	-	-	-	"LB7L-B
	CVO FLST (Softail)	07-15	-	EB20-3	EBX20-BS	-				-	-	-	12N7-3B
				EB20-3	EBX20-BS	-	175	SS175, SX175	74-75	-	-	-	"LB7L-B
1690	FLHTK (Touring)	10-11	MX30-3	LT30-3/EB30-3	EBX30-BS	-				-	-	-	12N7-3B
	FLH, TLT (Touring)	11-15	MX30-3	LT30-3/EB30-3	EBX30-BS	-	125	SS125, SX125	74-75	-	-	-	"LB7L-B
	FLS (Softail)	12-15	-	LT20-3	LT20-3-BS	-		SXT125	75-75	-	-	-	12N7-3B
				EB20-3	EBX20-BS	-				-	-	-	"LB7L-B
	FXD (Dyna)	12-15	-	LT20-3	LT20-3-BS	-		TX125	73-75	-	-	-	12N7-3B
				EB20-3	EBX20-BS	-				-	-	-	"LB7L-B
1584	FXD (Dyna)	07-11	-	LT20-3	LT20-3-BS	-	90	Z90	73-75	-	-	-	12N7-3B
				EB20-3	EBX20-BS	-				-	-	-	"LB7L-B
	FXST, FLST (Softail)	07-11	-	LT20-3	LT20-3-BS	-	HONDA						
				EB20-3	EBX20-BS	-	1800	GL1800 Gold Wing	09-15	MX20-3	-	-	-
	FL, FLH (Touring)	07-10	MX30-3	LT30-3/EB30-3	EBX30-BS	-		GL1800 Gold Wing	01-09	-	LT20-3	LT20-3-BS	-
1450	FXD (Dyna)	99-06	-	LT20-3	LT20-3-BS	-				-	EB20-3	EBX20-BS	-
				EB20-3	EBX20-BS	-				-	LT20-3	LT20-3-BS	-
	FXST, FLST (Softail)	00-06	-	LT20-3	LT20-3-BS	-		NRX1800	04-05	-	EB20-3	EBX20-BS	-
				EB20-3	EBX20-BS	-		Valkyrie Rune		-	EB20-3	EBX20-BS	-
	FL, FLH (Touring)	00-06	MX30-3	LT30-3/EB30-3	EBX30-BS	"LB30L-B		VTX1800C	02-11	-	LT20-3	LT20L-BS	-
	FL, FLH (Touring)	99	MX30-3	LT30-3/EB30-3	EBX30-BS	"LB30L-B		VTX1800R Retro	02-11	-	EB20-3	EBX20-BS	-
1340	FXD, FXST (Dyna)	97-99	-	LT20-3	LT20-3-BS	-	1900	GH1500 Gold Wing	86-00	-	LT24-3	LT18L-BS	"Ln50-N18L-A3
				EB20-3	EBX20-BS	-				-	EB24-3	EBX18L-BS	-
	FXD, FXST (Dyna)	91-96	MX16-3	MX16-3/EB16B-3*	EB16B-BS	"LB16L-A2		GL1500 Valkyrie	97-03	MX14-4	LT14-4	LT14-4-BS	-
	FX, FXR (Dyna)	79-94	MX16-4	EB16B-4	EB16B-BS	"LB16-B				-	EB14C-4	EBX14-BS	-
	FXR (Dyna)	99-00	MX16-4	EB16B-4	EB16B-BS	"LB16-B	1300	CTX1300	14	-	EB24A-4	-	-
	FLST (Softail)	97-99	-	LT20-3	LT20-3-BS	-		ST1300, A, P	03-14	-	EB24A-4	-	-
				EB20-3	EBX20-BS	-				-	-	-	-

* Must use adaptor kit available from Buell. *** "Type": High performance flooded battery for example, "LB16-B" < Requires use of Cover/Spacer Kit.



MOTORCYCLE BATTERY APPLICATIONS

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded	CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
HONDA							HONDA						
1300	VTX1300C,R,S, Retro	03-14	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	-	800	VFR800A Interceptor VFR800F Interceptor	14 98-01	- MX12-4	EB212A-4 LT12-4 EB12-4	- LTX12-BS EBX12-BS	-
	CB1300 Super Four	01-13	-	EB214A-4	-	-		VT800C Shadow	88	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	"LB14-B2
	VFR1200F	10-14	-	EB214A-4	-	-		CB750 Nighthawk	91-03	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	"LB14-A2
1200	VFR1200XD	13	-	EB214A-4	-	-	750	CB750 Nighthawk	91-03	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	"LB14-A2
	GL1200 Gold Wing	84-87	MX18-3	LT24-3 EB24-3	LTX18L-BS EBX18L-BS	"LN50-N18L-A3		CB750A Hondamatic	76-78	MX18-3	LT24-3 EB24-3	LTX18L-BS EBX18L-BS	"LN50-N18L-A3
	CB1100	10-14	-	EB214A-4	-	-		CB750C Custom	80-82	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	"LB14L-A2
1100	CB1100F Super Sport	83	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	"LB14L-A2	750	CB750F Super Sport	75-82	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	"LB14L-A2
	CBR1100XX	01-04	-	EB212A-4	-	-		CB750K Four	69-82	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	"LB14L-A2
	CBR1100XX	97-00	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	-		CB750K Four	69-82	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	"LB14L-A2
1000	GL1100 Gold Wing	80-83	-	LT24-3 EB24-3	LTX18L-BS EBX18L-BS	"LN50-N18L-A3	750	CB750C Limited Ed.	79	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	"LB14L-A2
	ST1100,ABS-TCS, 1100A	91-02	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	-		CB750C Nighthawk	82-83	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	"LB14L-A2
	VF1100C V65 Magna	83-86	-	LT20-4 EB20-4F	LTX20-BS EBX20-BS*	"LB18-A		RVT750R (RC45)	94	MX9-4	LT9-4 EB9-4	LTX9-BS EBX9-BS	-
954	VF1100S V65 Sabre	94-95	-	LT20-3 EB20-3F	LTX20L-BS EBX20L-BS*	"LB18L-A	750	VF750C V45 Magna	88	-	-	-	"LB12A-A
	VT1100 Shadow, C2 Sabre	00-07	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	-		VF750C V45 Magna	82-83	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	"LB14-A2
	VT1100C,C3,T Shadow (Sport,Aero,A.C.E.Tourer)	01-07	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	-		VF750C,C2,D Magna	94-03	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	-
929	VT1100C,C3,T Shadow (Sport,Aero,A.C.E.Tourer)	98-00	-	-	-	"HLB16A-AB	750	VF750F V45 Interceptor	83-84	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	"LB14-A2
	VT1100C Shadow/Split	85-97	-	-	-	"HLB16A-AB		VF750S V45 Sabre	82-83	MX15-3	LT14A-3 EB14A-3+	LTX14AHL-BS EBX14AHL-BS+	"SLB14L-A2+
	VT1100C2 Shadow A.C.E.	95-99	-	-	-	"HLB16A-AB		VF750F Interceptor	86	-	-	-	"LB12A-B
919	CB1000	94-95	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	-	700	VFR750F	90-97	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	-
	CB1000C Custom	83	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	"LB14L-A2		VFR750R (RC30)	90	MX9-4	LT9-4 EB9-4	LTX9-BS EBX9-BS	-
	CB1000F Hurricane	87-96	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	"LB14L-B2		VT750C,CA,C2 Shadow Split,Aero	07-09	-	EB212A-4	-	-
900	CB1000R	05-14	-	EB210A-4	-	-	700	VT750C,C2,C3 RS Shadow	10-15	-	EB214A-4	-	-
	CBF1000F	09-10	-	EB210A-4	-	-		VT750C,CA	04-09	-	EB212A-4	-	-
	CBR1000RA(ABS)	08-15	-	EB210A-4	-	-		VT750C Shadow	98-00	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	-
800	CBR1000RR	08-15	-	EB27-3	-	-	700	VT750C,CD2 Shadow Deluxe	98-02	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	-
	CBR1000RR	04-07	-	EB210A-4	-	-		VT750C,CA,C2,C3 RS Shadow	02-03	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	-
	CBX1000 Super Sport	79-82	-	LT20-3 EB20-3F	LTX20L-BS EBX20L-BS*	"LB18L-A		VT750C Shadow	83	MX15-4	EB214A-4	-	"HLB16A-AB
800	CBX1000 Super Sport(Dp)	82	MX18-3	LT24-3 EB24-3	LTX18L-BS EBX18L-BS	"LN50-N18L-A3	700	VT750C Shadow Split	01-07	MX15-4	EB214A-4	-	-
	GL1000 Gold Wing	75-79	MX15-3	LT24-3 EB24-3	LTX18L-BS EBX18L-BS	"LN50-N18L-A3		VT750C,C2,C3 RS Shadow	10-14	-	EB214A-4	-	-
	RVT1000R RC51	00-06	-	EB212A-4	-	-		CTX700	14	-	EB212A-4	-	-
800	VTR1000F Super Hawk	01-05	-	EB212A-4	-	-	700	CB700RC Nighthawk'S	84-85	-	-	-	"LB14L-A1
	VTR1000 Super Hawk	97-00	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	-		NC700X	12-15	-	EB212A-4	-	-
	VF1000R,F	94-96	-	-	-	-		NC700J(RM4)	15	-	EB212A-4	-	-
800	CBR954RR	02-03	-	EB210A-4	-	-	700	NT700V	10-13	-	EB214A-4	-	-
	CBR929RR,RE	00-01	-	EB210A-4	-	-		VF700C Magna	87	-	-	-	"LB12A-A
	CBR900F (F19)	02-06	-	EB210A-4	-	-		VF700C Magna	84-86	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	"LB14-A2
800	CBR900C,F	80-82	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	"LB14L-A2	700	VF700F Interceptor	84-85	MX15-4	LT14A-4 EB14A-4	LTX14AHL-BS EBX14AHL-BS	"LB14L-A2
	CBR900,RR	93-99	MX9-4	LT9-4 EB9-4	LTX9-BS EBX9-BS	-		VF700S Sabre	84-85	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	"LB14L-A2
	PC800 Pacific Coast	85-98	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	-		VF700F Interceptor	86-87	-	-	-	"LB12A-B
800	VFR800A Interceptor,ABS	02-12	-	EB212A-4	-	-	700	VF700F Interceptor	86-87	-	-	-	"LB12A-B



MOTORCYCLE BATTERY APPLICATIONS

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded	CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
HONDA							HONDA						
700	V7700C Shadow	86-87	MX15-4	LT14A-4 EB14A-4	LT14AH-BS EBX14AH-BS	*LB14-B2	400	CB400F CB-1	89-90	MX15-4	LT9-4/EB9-4	LTX9-BS EBX9-BS	-
	V7700C Shadow	84-85	-	-	-	*LB16A-AB		CB400F Super Sport	75-77	-	-	-	*LB12A-A *LB12A-A-1
680	DN-61	09	-	EB214A-4	-	-		CB400T Hawk/Hawk II	78-81	-	-	-	*LB12A-A
650	CB650C Custom	79-82	-	-	-	*LB12A-A		CB400T Hawk I	78-79	-	-	-	*LB9-B *LB12A-A
	CB650C Nighthawk	83-85	-	-	-	*LB12A-A						-	*LB9-B *LB12A-A
	CB650C Nighthawk	82	-	-	-	*LB12A-A						-	*LB9-B *LB12A-A
	CX650C Custom	83	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14-A2	360	CM400 (40)	79-81	-	-	-	*LB12A-A
	CX650T Turbo	83	MX15-3	LT14A-3 EB14A-3	LTX14AH-BS EBX14AH-BS	*LB14A-2		CB360, G, T	74-76	-	-	-	*LB12A-A *LB12A-A-1
	GL650 Silver Wing Interstate	83	MX15-3	LT14A-3 EB14A-3	LTX14AH-BS EBX14AH-BS	*LB14A-2		CL360T	76-77	-	-	-	*LB9-B *LB12A-A
	N650 Hawk GT	88-91	MX15-4	LT9-4/EB9-4	LTX9-BS EBX9-BS	-		CL360 Scrambler	74-75	-	-	-	*LB12A-A *LB12A-A-1
	NT650V	-	-	-	-	-	350	CB350 Super Sport4	68-74	-	-	-	*LB12A-A *LB12A-A-1
	Nx650	88-89	-	LT9-4/EB9-4	LTX9-BS EBX9-BS	-		CL350 Scrambler	68-73	-	-	-	*LB12A-A *LB12A-A-1
	SLR650	-	-	-	-	-		SL350 Motosport	70-73	-	-	-	*LB12A-A *LB12A-A-1
	Vigor 650	-	-	-	-	-		SL350 Motosport	69-70	-	-	-	*LB12A-A *LB12A-A-1
	XR650L	93-15	MX15-4	LT9-4/EB9-4	LTX9-BS EBX9-BS	-	305	CA77 Dream Touring (late)	63-69	-	-	-	*LB3L-A *LB12A-A
								CB77 Super Hawk	61-68	-	-	-	*LB12A-A *LB12A-A-1
600	CB600F	04-06	-	LT7-3/EB7-3	LTX7L-BS EBX7L-BS	-	300	CL77 Scrambler	65-68	-	-	-	*LB9-B *LB12A-A
	CBR600	87-00	-	LT9-4/EB9-4	LTX9-BS EBX9-BS	-		CB300F	15	-	LT7-3/EB7-3	LTX7L-BS EBX7L-BS	-
	CBR600F4i, 600RR	01-15	-	EB210A-4	-	-		CBR300R	15	-	LT7-3/EB7-3	LTX7L-BS EBX7L-BS	-
	V7500C, CD Shadow Deluxe	04-07	-	EB210A-4	-	-	250	CBR250R	11-13	-	LT7-3/EB7-3	LTX7L-BS EBX7L-BS	-
	V7500C, CD Shadow Deluxe VIX	88-03	MX15-4	LT9-4/EB9-4	LTX9-BS EBX9-BS	-		CMX250C Rebel CA72	96-94	-	LT7-3/EB7-3	LTX7L-BS EBX7L-BS	-
	XL600R	83-87	-	-	-	*LB3L-A		Dream Touring (late)	63-66	-	-	-	*LB12A-A
	XL600V Transalp	89-90	-	-	-	*LB12A-A		CA72 Dream Touring (late)	63-66	-	-	-	*LB12A-A
	CB500 Four, K, SS	74-78	-	-	-	*LB12A-A		CB250 Nighthawk	91-09	-	LT7-3/EB7-3	LTX7L-BS EBX7L-BS	-
	CB500SC Nighthawk	83	-	-	-	*LB12A-A		CL72 Hawk	61-66	-	-	-	*LB12A-A
	CB500 Four, Twin	71-76	-	-	-	*LB12A-A		CL72 Scrambler	62-65	-	-	-	*LB12A-A
	CB500, C,D,T	78-82	MX15-3	LT14A-3 EB14A-3	LTX14AH-BS EBX14AH-BS	*LB14A-2		CM250C Custom	82-83	-	-	-	*LB9-B
	F600 Ascot	82-83	MX15-3	LT14A-3 EB14A-3	LTX14AH-BS EBX14AH-BS	*LB14A-2		CMX250C Rebel	96-09	-	LT7-3/EB7-3	LTX7L-BS EBX7L-BS	-
	GB500	89-90	-	-	-	*LB12A-B		CMX250C Rebel LTD	85-87	-	-	-	*LB9-B
	GL500J Silver Wing	81-82	MX15-3	LT14A-3 EB14A-3	LTX14AH-BS EBX14AH-BS	*LB14A-2		CRF250X	04-09	-	LT5-3/EB5-3	LTX5L-BS EBX5L-BS	-
	VF500C V30 Magna	84-85	-	-	-	*LB12A-A		M250 Etaline	74-76	-	-	-	*LB9-B
	VF500F Interceptor	84-86	-	-	-	*LB12A-A		NC250	88-90	-	LT7-3/EB7-3	LTX7L-BS EBX7L-BS	-
	VF500C Shadow	83-86	-	-	-	*LB12A-A		VTR250 Interceptor VTR	88-89	-	-	-	*LB9-B
	VF500T Ascot	83-84	-	-	-	*LB12A-A		XL250	72-76	-	-	-	*LB9-B
	XL500R	82	-	-	-	*LB3L-A		XL250R	82-87	-	-	-	*LB3L-A
	XL500S	79-81	-	-	-	*LB4-2A-4		XL250S	78-81	-	-	-	*LB4-2A-4
450	CB450, SS	67-74	-	-	-	*LB12A-A		XL250L	91-96	-	LT4-3/EB4-3	LTX4L-BS EBX4L-BS	-
	CB400A	78	-	-	-	*LB12A-A	230	CRF230F	03-15	-	LT5-3/EB5-3	LTX5L-BS EBX5L-BS	-
	CB450SC Nighthawk, T	82-86	-	-	-	*LB12A-A		CRF230L	08-13	-	EB27-3	-	-
	CL450 Scrambler	67-74	-	-	-	*LB12A-A		CRF230L	14	-	LT5-3/EB5-3	LTX5L-BS EBX5L-BS	-
	CMX450C CRF450X Honda matic E	05-15	-	EB27-3	-	*LB12A-A		CRF230L	08-10	-	EB27-3	-	-
	CMX450C Rebel	86-87	-	-	-	*LB12A-A	200	Ch200	74-76	-	-	-	*LB9-B *LB12A-A

* See Battery supplier Cross Reference



MOTORCYCLE BATTERY APPLICATIONS

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded	CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
HONDA							HONDA						
200	CL, CB200 Scrambler	74	-	-	-	*LB9-B *LB12A-4B-1	90	CL90L SHF Scrambler CM91 Honda90 (C90M)	67-70	-	-	-	*LB5.5-1D *LB5-1B
	CM200T Twinstar	81-82	-	-	-	*LB9-B *LB12A-4B-1		CT200 Trail 90	64-66	-	-	-	*LB5.5-1D
	CM200T Twinstar	80	-	-	-	*LB9-B *LB12A-4B-1		CT90 Trail	66-70	-	-	-	*LB5.5-1D
	TLR200 Reflex	86-87	-	LT4-3/EB4-3	-	B54-6A		E200 Cub	91-96	-	LT5-3/EB5-3	LTX5L-BS EBX5L-BS	-
								S90 Super (C90)	64-69	-	-	-	*LB5-1B
	TR200 Fat Cat	87	-	LT7A-4 EB7A-4	LTX7A-BS EBX7A-BS	-		SL90 Motosport	69	-	-	-	*LB5.5-1D
	TR200 Fat Cat	86	MX15-4	LT9-4 EB9-4	LTX9-BS EBX9-BS	-	80	ST90 Trail Sport	73-75	-	-	-	*LB5.5-1D
								XL80S	83-85	-	-	-	*LB4-2A-4B(6)
								XL80S	80-82	-	-	-	*LB4C-1B
	XL200R	83-84	-	-	-	*LB3L-A	75	XL75	77-79	-	-	-	*LB4C-1B
185	CM185T Twinstar	78-79	-	-	-	B54-6A	70	CT70 Passport	82-83	-	-	-	*LB5L-B
	XL185S	79-83	-	-	-	BN4-2A-4		CT70 Passport	80-81	-	-	-	*LB11-2D
175	CA175 Touring (CD175)	68-69	-	-	-	B54-6		CM170 Honda	70-73	-	-	-	*LB11-2D
	CA175 Touring (CD179G)	69-70	-	-	-	B54-6A		CL70 Scrambler	69-73	-	-	-	*LB5.5-1D-1
	CB175, K Super Sport	69-73	-	-	-	*LB9-B *LB12A-4B-1		CT70	91-94	-	LT4-3/EB4-3	LTX4L-BS EBX4L-BS	-
								CT70 Trail	80-82	-	-	-	*LB4-2A-4B(6)
	CL175, K Scrambler	68-73	-	-	-	*LB9-B *LB12A-4B-1		CT70 Trail	74-79	-	-	-	*LB4C-1B
								CT70 Trail, 70H	69-71	-	-	-	*LB2A-2C
	SL175 Motosport	70-72	-	-	-	BN6-3B		CT70, 70H	72-73	-	-	-	*LB2A-2C-3
	XL175	73-78	-	-	-	*LB9-B		SL70 Motosport	73	-	-	-	*LB2A-2C-3
160	CB160 Sport	65-69	-	-	-	*LB9-B *LB12A-4B-1		SL70 Motosport	71-72	-	-	-	*LB2A-2C
								XL70	4-76	-	-	-	*LB4C-1B
	CL160 Scrambler	66-68	-	-	-	*LB9-B *LB12A-4B-1						-	*LB2-3A
150	CRF150F	06-15	-	LT5-3/EB5-3	LTX5L-BS EBX5L-BS	-	65	S65 Sport (CS65)	65-69	-	-	-	*LB2-3A
							55	C, CA105T Trail	62-65	-	-	-	*LB2-3A
							50	C, 100, T, CA100, T, C110, CA110	59-69	-	-	-	*LB2-3A
125	CRF125F	14-15	-	LT4-3/EB4-3	LTX4L-BS EBX4L-BS	-		M65	82	-	-	-	*LB2.5L-C
	MSX123 Grom	14-15	-	LT4-3/EB4-3	LTX4L-BS EBX4L-BS	-		NA50 Express II	90-91	-	-	-	*LB4-2A-4B(6)
								NA50 Express II	79	-	-	-	*LB2-3A
	CB125S	81-82	-	-	-	BN6-3B-1		NC50 Express	90-93	-	-	-	*LB4-2A-4B(6)
	CB125S	73-80	-	-	-	BN6-3B		NC50 Express	78-79	-	-	-	*LB2-3A
	CL125A Scrambler (Twin)	67-69	-	-	-	B54-6		NC50 Express	77	-	-	-	*LB2A-2C-3
	CL125S Scrambler	73-75	-	-	-	BN4C-1B		NS50F	90	-	-	-	*LB3L-A
	CT125 Trail	77	-	-	-	BN4C-1B		NU50 Urban Express	82-83	-	-	-	*LB2.5L-C-1
	MT125 Etaline	74-76	-	-	-	BN6-3B		NU50M Urban Express Dk	82-83	-	-	-	*LB4L-B
	NX125	88-90	-	LT7-3/EB7-3	LTX7L-BS EBX7L-BS	-		NX50M Express SR	81-82	-	-	-	*LB4L-B
								Z650	88	-	LT4-3 EB4-3	LTX4L-BS EBX4L-BS	-
	SL125 Motosport	71-73	-	-	-	BN6-3B	INDIAN						
	SS125A Super Sport	67-69	-	-	-	B54-6		Chief Classic Roadmaster Vintage, Chetlain	14-15	MX20-3	-	-	-
	XL125	74-78	-	-	-	BN4C-1B						-	-
	XL125S	79-84	-	-	-	BN4-2A-4	1819	Chief Classic Roadmaster Vintage, Chetlain	14-15	MX20-3	-	-	-
	XL125S	85	-	-	-	*LB2.5L-C						-	-
110	CRF110F	13-15	-	LT4-3/EB4-3	LTX4L-BS EBX4L-BS	-	1720	Chief Classic, Vintage, Darkhouse	12-13	MX18-3	LT24-3/EB24-3	LTX24L-BS EBX24L-BS	-
												-	-
	C110	09-10	-	EB27-3	-	-	1638	Chief	02-03	-	LT24-3	LTX24L-BS EBX24L-BS	-
	CT110 Trail	86	-	-	-	BN4-2A-4						-	-
	CT110 Trail	80-84	-	-	-	BN4-2A-4B(6)	1442	Scout, Spirit	02-03	-	LT20-4	LTX20-BS EBX20-BS	-
	CB100 Super Sport	70-72	-	-	-	BN6-3B		All Models	99-01	-	EB20-4	LTX20-BS EBX20-BS	-
	CL100, S Scrambler	70-73	-	-	-	BN6-3B						-	-
	SL100 Motosport	70-73	-	-	-	BN6-3B	1133	Scout	15	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS	*LB14A-2
	XL100	77-78	-	-	-	BN4C-1B	KAWASAKI						
	XL100	74-76	-	-	-	BN6-3B						-	-
	XL100S	83-85	-	-	-	BN4-2A-4						-	-
	XL100S	81-82	-	-	-	BN4C-1B	2000	VN2000-A Vulcan	04-13	-	-	LTX15-BS EBX15-BS*	-
	XL100S	79-80	-	-	-	BN4-2A-4						-	-
90	CA200 Honda (C200 Touring 90)	63-66	-	-	-	BN6-1D-2	1700	VN1700 Voyager, Nomad, Vaquero	05-14	-	-	LTX20CH-BS EBX20CH-BS	-

* This battery includes a sensor

+ Eliminates need for sensor (needs to be disabled)

* See Battery supplier Cross Reference

** When ordering this battery specify sensor

The LT20-3/EB20-3 series batteries may be used as an optional upgrade, but some modification to the hold down may be necessary. See battery label for retrofit cautions.



MOTORCYCLE BATTERY APPLICATIONS

CC	Model	Year	MX	Factory A. divided Maintenance Free	Dry Charged Maintenance Free	Flooded	CC	Model	Year	MX	Factory A. divided Maintenance Free	Dry Charged Maintenance Free	Flooded
KAWASAKI							KAWASAKI						
1600	VN1600 Vulcan Classic	03-09	-	-	LTX16-BS EBX16-BS*	-	1000	KZ1000-C Police	80-81	MX16-3	EB16B-3	EB16BL-BS	"LB16L-B
	VN1600 Mean Streak	04-09	-	-	LTX16-BS EBX16-BS*	-		KZ1000-C Police Z1-R	78-79	MX15-3	LT14A-3	LTX14AHL-BS	"LB14L-A2
1500	VN1500 Vulcan 86, SE	87-98	MX18-3	LT24-3EB24-3	LT24-3EB24-3	"LB18L-A3		KZ1000, LTD	77-80	MX15-3	LT14A-3	LTX14AHL-BS	"LB14L-A2
	VN1500-C Vulcan L	96-97	MX18-3	LT24-3EB24-3	LT24-3EB24-3	"LB18L-A3		KZ1000-E ST, Shaft	79-80	-	LT14A-3	LTX14AHL-BS	"LB14L-A2
	VN1500-G, J, L, R	99-05	-	-	LTX16-BS EBX16-BS*	-		KZ1000-G Classic	80	MX15-3	LT14A-3	LTX14AHL-BS	"LB14L-A2
	Vulcan Nomad Drifter	-	-	-	LTX16-BS EBX16-BS*	-			81-83	-	LT20-3	LTX20L-BS	"LB18L-A
	VN1500-DJE	96-00	-	-	LTX16-BS EBX16-BS*	-		KZ1000-R Replica	82-83	-	LT20-3	LTX20L-BS	"LB18L-A
	N Vulcan Classic	-	-	-	LTX16-BS EBX16-BS*	-			-	-	EB20-3F	EB20L-BSF	-
	VN1500 P Vulcan - Mean Streak	02-03	-	-	LTX16-BS EBX16-BS*	-		Z1000 - ABS	14	-	-	EB12A-BS	-
1400	Zg1400 Concours	08-14	MX14-4	LT14-4EB14C-4	LT14-4EB14C-4	"LB14L-A2		Z1000	03-13	MX9-4	LT9-4EB9-4	LT9-4EB9-4	"LB18L-A
	ZX14 Ninja	06-14	MX14-4	LT14-4EB14C-4	LT14-4EB14C-4	"LB14L-A2		ZG1000A Concours	86-06	-	EB20-3F	EB20L-BSF	-
	Concours 14 ABS	14	-	EB214A-4	-	-		ZL1000-A	87	MX15-3	LT14A-3	LTX14AHL-BS	"LB14L-A2
1300	ZX1300 Touring	79-82	-	EB24-3	-	"LB18L-A3		ZX10R	11-14	-	EB27-3	-	-
	ZN1300-A Voyager	83-88	-	EB24-3	-	12N2-4-3		ZX10R - ABS	11-14	-	EB210A-4	-	-
1200	ZG1200 Voyager XII	86-03	MX18-3	LT24-3	LT24-3	"LB18L-A3		ZX10R	86-90	MX15-3	LT14A-3	LTX14AHL-BS	"LB14L-A2
	ZRX1200R	01-05	MX14-4	LT14-4	LT14-4	"LB14L-A2			-	-	EB14A-3	EBX14AHL-BS	"LB14L-A2
	ZRX1200 DAEG	09-13	MX12-4	LT12-4	LT12-4	"LB12L-A2		ZX1000-A Ninja	86-90	MX15-3	LT14A-3	LTX14AHL-BS	"LB14L-A2
	ZX-12R	00-05	MX14-4	LT14-4	LT14-4	"LB14L-A2			-	-	EB14A-3	EBX14AHL-BS	"LB14L-A2
	ZZR1200	02-06	MX14-4	LT14-4	LT14-4	"LB14L-A2		"ZX1000-C Ninja - ZX1000-A	80-81	-	LT12B-4EB12B-4	-	-
1100	KZ1100-A, LTD	81-83	-	-	LT20-3	"LB18L-A		Ninja1000 - ABS	14	-	-	EB12A-BS	-
	KZ1100-B GP	82	MX16-3	EB16B-3	EB16BL-BS	"LB16L-B"	900	KZ900, LTD	76-77	-	-	-	"LB10L-A2
	KZ1100-B GP	81	MX16-3	EB16B-3	EB16BL-BS	"LB16L-B"		Vulcan 900 Classic	06-14	MX12-4	LT12-4	LTX12-BS	-
	ZN1100-B LTD	84-85	MX15-3	LT14A-3	LT14AHL-BS	"LB14L-A2			-	-	EB12-4	EBX12-BS	-
	ZR1100	92-95	-	-	LTX16-BS EBX16-BS*	-		Z1 Series	73-75	MX15-3	LT14A-3	LTX14AHL-BS	"LB14L-A2
	ZRX1100	99-00	MX14-4	LT14-4	LT14-4	"LB14L-A2		ZL900-A Eliminator	85-86	MX15-3	LT14A-3	LTX14AHL-BS	"LB14L-A2
	ZX1100-A GPZ	83-84	MX16-3	EB16B-3	EB16BL-BS	"LB16L-B"		ZX900-A Ninja	84-86	MX15-3	LT14A-3	LTX14AHL-BS	"LB14L-A2
	ZX1100-C Ninja ZX-11	90-93	MX15-3	LT14A-3	LT14AHL-BS	"LB14L-A2		"ZX900-B Ninja (ZX-9R)"	94-97	MX12-4	LT12-4	LTX12-BS	-
	ZX1100-D Ninja ZX-11 (CN)	93-94	MX14-4	LT14-4	LT14-4	"LB14L-A2		ZX900-C, E, F Ninja (ZX-9R)	98-03	MX9-4	LT9-4	LTX9-BS	-
	ZX1100-D Ninja ZX-11	95-01	MX14-4	LT14-4	LT14-4	"LB14L-A2		VN800-A, B, E Vulcan, Classic Drifter	04-06	MX12-4	LT12-4	LTX12-BS	-
	ZX1100-E (Gpz1100), ABS	95-97	MX14-4	LT14-4	LT14-4	"LB14L-A2	800	VN800-A, B, C Vulcan, Classic Drifter	95-03	MX14-4	LT14-4	LTX14-BS	-
1000	Ninja 1000 - ABS	14	-	-	EB12A-BS	-		H2 Series	72-75	-	-	-	12N5.5-4A
	Ninja 1000	11-13	MX9-4	LT9-4EB9-4	LT9-4EB9-4	"LB12L-A2"	750	KZ750, LTD, CSR	76-79	MX15-3	LT14A-3	LTX14AHL-BS	"LB14L-A2
	KZ1000-P Police	02-03	-	-	LT20-3	"LB18L-A			-	-	EB14A-3	EBX14AHL-BS	"LB14L-A2
	KZ1000-P Police	05	-	-	LT20-3	"LB18L-A		KZ750-E, H, L LTD	80-83	-	-	-	"LB12A-A"
	KZ1000-P Police	83-01	-	-	LT20-3	"LB18L-A		KZ750-F LTD, Spectre	83	MX15-3	LT14A-3	LTX14AHL-BS	"LB14L-A2
					EB20-3F	"LB18L-A			93	MX9-4	LT9-4	LTX9-BS	-
					EB20-3F	"LB18L-A		KZ750-L Ninja	82	-	-	-	"LB12A-A"
					EB20-3F	"LB18L-A		KZ750-R GP	86-06	MX15-3	LT14A-3	LTX14AHL-BS	"LB14L-A2
					EB20-3F	"LB18L-A		VN750-A Vulcan	06-13	MX9-4	LT9-4	LTX9-BS	-
					EB20-3F	"LB18L-A		Z750 (EU)	06-13	MX9-4	LT9-4	LTX9-BS	-
					EB20-3F	"LB18L-A			84-85	MX15-3	LT14A-3	LTX14AHL-BS	"LB14L-A2
					EB20-3F	"LB18L-A		ZN750-A LTD	84-85	MX15-3	LT14A-3	LTX14AHL-BS	"LB14L-A2
					EB20-3F	"LB18L-A		ZR7, S	00-05	MX12-4	LT12-4	LTX12-BS	-

* This battery includes a sensor. + Eliminates need for sensor (needs to be disabled). ** When ordering this battery, specify sensor.
 - G3SS & G3TR models having the engine production #235611 and above, use a RM4-2A5 battery. ++ Must use existing terminal adaptor.
 # The LT20-3EB20-3 series batteries may be used as an optional upgrade, but some modification to the hold down may be necessary. See battery label for retrofit cautions.



MOTORCYCLE BATTERY APPLICATIONS

CC	Model	Year	MX	Factory A. div. Maintenance Free	Dry Charged Maintenance Free	Flooded	CC	Model	Year	MX	Factory A. div. Maintenance Free	Dry Charged Maintenance Free	Flooded	
KAWASAKI							KAWASAKI							
750	ZR750	05-06	MX9-4	LT9-4EB9-4	LT9-8S EBX9-8S	-	500	EN500-A Vulcan	90-96	-	-	-	"LB12A-A	
	ZR750-C Zephyr	91-94	MX12-4	LT12-4EB12-4	LT12-8S EBX12-8S	-		EN500-C Vulcan LTD	96-10	-	-	-	"LB12AL-A2	
	ZX750-E Turbo GP2	83-85	MX15-3	LT14A-3 EB14A-3+	LTX14AHL-BS EBX14AHL-BS+	"SLB14L-A2"		EX500-A	87-93	MX15-3	"LT14A-3" EB14A-3	-	"LB14L-A2	
	ZX750-F Ninja	87-90	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	"LB14L-A2		EX500-D Ninja 500R	94-10	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	"LB14L-A2	
	ZX750-H Ninja ZX-7	90	-	-	-	"LB12AL-A++		H1 Series	73-75	-	-	-	"LB9L-B	
	ZX750-H Ninja ZX-7	89	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	"LB14L-A2		H1 Series	69-72	-	-	-	12N9-3B	
	ZX750-J Ninja ZX-7	91-95	MX12-4	LT12-4 EB12-4	LTX12-8S EBX12-8S	-		KH500-A	76	-	-	-	12N9-4B-1	
	ZX750-Ninja ZX-7RR	91-97	MX9-4	LT9-4 EB9-4	LTX9-8S EBX9-8S	-		450	KLX450R	08-10	-	EB27-3	-	"LB12A-A
	ZX750-P Ninja ZX-7R	96-03	MX12-4	LT12-4 EB12-4	LTX12-8S EBX12-8S	-		440	EN450-A 454 LTD	85-90	-	-	-	"LB12A-A
								400	KZ440 (All)	80-83	-	-	-	12N5.5-4A
700	KZ700-A	84	-	-	-	"LB12A-A		KLX400R/KLX400SR	03-04	-	LT7B-4EB7B-4	-	"LB12A-A	
	VN700-A Vulcan	85	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	"LB14L-A2		KZ400 Deluxe	77-79	-	-	-	12N12A-4A-1	
	ZN700-A LTD	84-85	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	"LB14L-A2		KZ400-C	78	-	-	-	12N5.5-4A	
								KZ400-D, H	74-79	-	-	-	"LB12A-A	
									-	-	-	-	12N12A-4A-1	
								KZ400-S	75-77	-	-	-	12N5.5-4A	
								S3 Series	74-75	-	-	-	12N5.5-4A	
							350	A7 Series	66-71	-	-	-	"LB9-B	
								F5 Series	70-71	-	-	-	12N9-4B-1	
								F9 Series	73-75	-	-	-	6N2-2A-3	
650	ER6n	09-12	MX12-4	LT12-4EB12-4	LT12-8S EBX12-8S	-		F9 Series	72	-	-	-	6N4B-2A-3	
	KL650-A, E, KLR, KL650-B, Tengel	87-14	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	"LB14L-A2		F9 Series	72	-	-	-	6N2-2A-3	
	KL650 Versys	08-14	MX12-4	LT12-4EB12-4	LT12-8S EBX12-8S	-		S2 Series	72-73	-	-	-	12N5.5-4A	
	KLX650C, R	93-96	MX9-4	LT9-4EB9-4	LTX9-8S EBX9-8S	-		EX305-B GP	83	-	-	-	"LB9L-A1	
	KZ650SR, LTD, Custom	77-80	-	-	-	"LB10L-A2		KZ305CSR, LTD	81-88	-	-	-	"LB10L-A2	
	KZ650-H CSR	81-83	-	-	-	"LB12A-A			13-14	MX9-4	LT9-4 EB9-4	LTX9-BS EBX9-BS	-	
	Ninja 650R - ABS	12-14	-	-	-	EB12A-BS			-	-	-	-	12N9-4B-1	
	Ninja 650R	06-11	MX12-4	LT12-4EB12-4	LTX12-8S EBX12-8S	-	300	EX300 Ninja	66-71	-	-	-	"LB9-B	
	WV Series	66-70	-	-	-	"LB7L-B 12N7-3B	250	A1 Series	66-71	-	-	-	"LB9L-A1	
								EL250, HS	88-93	-	-	-	-	
636	ZX636-B Ninja ZX-6R	03-14	MX9-4	LT9-4EB9-4	LTX9-8S EBX9-8S	-		EX250, Ninja 250R	08	-	LT7A-4 EB7A-4	LTX7A-BS EBX7A-BS	-	
								EX250, Ninja 250R	09-13	MX9-4	LT9-4 EB9-4	LTX9-BS EBX9-BS	-	
600	KL600-A KLR	84	-	-	-	"LB4L-A			-	-	-	-	-	
	KL600-B KLR	85-86	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	"LB14L-A2		EX250 Ninja	96-07	-	LT7-3EB7-3	LTX7L-BS EBX7L-BS	-	
	ZL600 (All)	86-97	-	-	-	"LB12A-A			-	-	-	-	"LB9L-A1	
	ZX600-A, B, C, D Ninja	85-96	-	-	-	"LB12A-A		EX250 Ninja	86-94	-	-	-	12N5.5-4A	
	ZX600-E, F Ninja ZX-6R	93-02	MX12-4	LT12-4EB12-4	LT12-8S EBX12-8S	-		F4 Series	69-70	-	-	-	6N2-2A-3	
	ZX600-FA Ninja ZX-6R	08-13	MX9-4	LT9-4EB9-4	LTX9-8S EBX9-8S	-		F9 Series	71-72	-	-	-	6N4B-2A-3	
	ZX600-GJ Ninja ZX-6RZ	98-08	MX9-4	LT9-4EB9-4	LTX9-8S EBX9-8S	-		F11 Series	73-75	-	-	-	6N6-1D-2	
	ZX600-KJ Ninja ZX-6RR	03-06	MX9-4	LT9-4EB9-4	LTX9-8S EBX9-8S	-		KE250-B	77-79	-	-	-	12N5.5-4A	
								KH250-A	76	-	-	-	-	
								KL250 Super Sherpa	00-10	-	LT7-3EB7-3	LTX7L-BS EBX7L-BS	-	
550	KZ550 LTD, GP	80-83	-	-	-	"LB12A-A		EX250, KL250	78-84	-	-	-	6N6-1D-2	
	KZ550-F LTD	84	-	-	-	"LB12A-A++		KL250-D KLR	85-05	-	-	-	"LB4L-A	
	KZ550-F Spectro	83	-	-	-	"LB12A-A++		KZ250 CSR, LTD	80-83	-	-	-	"LB10L-A2	
	KZ550-H GP	82-83	-	-	-	"LB12A-A**		KL250S - SF	06-14	-	LT7-3EB7-3	LTX7L-BS EBX7L-BS	-	
	ZR550-B Zephyr	90-92	-	-	-	"LB12A-A			-	-	-	-	12N5.5-4A	
	ZX550-A Gzr	84-86	-	-	-	"LB12A-A**			-	-	-	-	"LB10L-B	
									-	-	-	-	6N4-2A-5	
									-	-	-	-	6N6-1D-2	
									-	-	-	-	-	
									-	-	-	-	-	
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
									-	-	-	-		
				</										



MOTORCYCLE BATTERY APPLICATIONS

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded	CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
KAWASAKI							SUZUKI						
125	F6 Series	71-73	-	-	-	6N4-2A-5	1250	GSF1250F, A Bandit	07-13	-	-	EB12A-BS	-
	KE125-A	76-83	-	-	-	6N6-1D-2	1200	GSF1200, S Bandit	97-05	MX12-4	LT12-4/EB12-4	LT12-BS	-
	KS125 Series	74-75	-	-	-	6N6-1D-2						EBX12-BS	-
120	C2SS RoadRunner	67-69	-	-	-	6N4-2A-3		GV1200GL Madura	85-86	MX15-3	LT14A-3	LT14AHL-BS	"LB14L-B2"
	C2TR RoadRunner	67-69	-	-	-	6N4-2A-3						EB14A-3	-
100	G3SS Series	75	-	-	-	6N4-2A-5	1150	GS1150E, S	83-86	MX15-3	LT14A-3	LT14AHL-BS	"SLB14L-B2"
	G3TR Series	71	-	-	-	6N4-2A-3						EB14A-3+	-
	G4TR Series	73-75	-	-	-	6N4-2A-5	1100	GS1100E, S	80-83	MX15-3	LT14A-3	LT14AHL-BS	"SLB14L-A2"
	G4TR Series	70-72	-	-	-	6N4-2A-3						EB14A-3+	-
	G5 Series	74-75	-	-	-	6N4-2A-5		GS1100G, K, L, Katana	82-84	MX15-3	LT14A-3	LT14AHL-BS	"LB14L-A2"
	G5 Series	72-73	-	-	-	6N4-2A-3						EB14A-3	-
	KE100-A	79-81	-	-	-	6N6-1D-2		GSXR1100	86-88	MX15-3	LT14A-3	LT14AHL-BS	"LB14L-A2"
	KE100-A	76-78	-	-	-	6N4-2A-5						EB14A-3	-
	KE100-B	82-81	-	-	-	6N6-1D-2		GSXR1100	93-96	MX12-4	LT12-4	LT12-BS	-
	KH100-B	76-77	-	-	-	6N4-2A-5						EB12-4	-
	KM100-A	79-81	-	-	-	6N6-1D-2		GSX1100F Katana	88-89	MX15-3	LT14A-3	LT14AHL-BS	"LB14L-B2"
	KM100-A	76-78	-	-	-	6N4-2A-5						EB14A-3	-
	KV100-A	76	-	-	-	6N4-2A-5		GSX1100G	91-93	MX14-4	LT14-4	LT14-BS	-
90	G3SS Series	73-74	-	-	-	6N4-2A-5						EB14C-4	-
	G3SS Series	69-72	-	-	-	6N4-2A-3	1000	DL1000 V-Strom	02-14	MX14-4	LT14-4	LT14-BS	-
	G3TR Series	69-70	-	-	-	6N4-2A-3						EB14C-4	-
	MC1 Series	73-75	-	-	-	6N4-2A-5		GS1000	78-82	MX15-3	LT14A-3	LT14AHL-BS	"LB14L-A2"
												EB14A-3	-
POLARIS VICTORY							SUZUKI						
1731	All Models	08-14	MX20-3	-	-	-		GSXR1000	01-04	MX12-4	LT12-4	LT12-BS	-
1507	V50C, DC Classic, Deluxe, Cruiser	98-04	-	-	-	LT20-3/EB20-3						EB12-4	-
	V52SC Sport Cruiser	00-01	-	-	-	LT20-3/EB20-3		GSXR1000	05-14	-	-	EB12A-BS	-
								SV1000, S	03-07	MX14-4	LT14-4	LT14-BS	-
												EB14C-4	-
	V52TC Touring Cruiser	03-06	-	-	-	LT20-3/EB20-3		TL1000R	98-03	-	-	EB12A-BS	-
								TL1000S	97-01	MX12-4	LT12-4	LT12-BS	-
	Vegas/Kingpin 8-ball, Hammer	03-05	-	-	-	LT20-3/EB20-3						EB12-4	-
							900	RF900, R, S, ZS	94-97	MX9-4	LT9-4/EB9-4	LT9A-BS	-
												EBX9-BS	-
SUZUKI							850	GS850G, GL	79-83	MX15-3	LT14A-3	LT14AHL-BS	"LB14L-A2"
1800	V2R1800 (V1109R)	06-14	-	-	-	LTX20C4-BS						EB14A-3	-
						EBX20C4-BS		VL800 Intruder, Volusia Boulevard, C50, T, M50	01-14	MX12-4	LT12-4	LT12-BS	-
	VLR1800 (C109R)	08-12	-	-	-	LTX20C4-BS						EB12-4	-
1600	Marauder/Boulevard M95	04-05	-	-	-	LTX16-BS		V9800 GL, S Intruder, S90	92-09	-	-	-	"LB16B-A1"
						EBX16-BS		V9800	90-93	-	-	-	"LB16B-A"
						EBX16-BS+		VZ800 Marauder	97-08	MX12-4	LT12-4/EB12-4	LT12-BS	-
1500	VL1500 Intruder	98-11	-	-	-	LTX16-BS-1						EBX12-BS	-
	Boulevard C90, T	98-11	-	-	-	LTX16-BS-1		GS750, Katana	77-83	MX15-3	LT14A-3	LT14AHL-BS	"LB14L-A2"
	GV1400GC, D, T	86-88	MX18-3	LT24-3/EB24-3	-	LTX24H-BS						EB14A-3	-
	VZ1500 Boulevard	14	-	-	-	LTX20C4-BS						LT9-4	-
						EBX20C4-BS		GSX750F Katana	98-06	MX9-4	LT9-4	LT9-BS	-
						EBX20C4-BS						EBB-4	-
	VZ1500 Boulevard	09-13	-	-	-	LTX20C4-BS		GSX750F Katana	89-97	MX15-3	LT14A-3	LT14AHL-BS	"LB14L-B2"
						EBX20C4-BS						EB14A-3	-
1400	M90	09-13	-	-	-	LTX20C4-BS		GSXR750	00-14	-	-	EB12A-BS	-
						EBX20C4-BS		GSXR750	96-99	MX9-4	LT9-4/EB9-4	LT9-BS	-
						EBX20C4-BS						EBX9-BS	-
	GV1400GC, D	86-88	MX18-3	LT24-3/EB24-3	-	LTX24H-BS		GSXR750	86-88	MX15-3	LT14A-3	LT14AHL-BS	"LB14L-A2"
	T Cavalcade	86-88	MX18-3	LT24-3/EB24-3	-	LTX24H-BS						EB14A-3	-
						EBX24H-BS+		GSXR750W	93-95	MX9-4	LT9-4/EB9-4	LT9A-BS	-
						LTX16-BS-1						EBX9-BS	-
	VS1400GL Intruder	87-11	-	-	-	LTX16-BS-1		GT750 LeMans	72-77	MX15-3	LT14A-3	LT14AHL-BS	"LB14L-A2"
	GLP, S63	87-11	-	-	-	LTX16-BS-1						EB14A-3	-
1300	GSX1300BK B-King	06-11	MX12-4	LT12-4/EB12-4	-	LTX12-BS		VS750GLP Intruder	88-91	-	-	-	"LB16B-A1"
						EBX12-BS						EB14A-3	-
	GSX1300RZ Hayabusa	06-14	MX12-4	LT12-4/EB12-4	-	LTX12-BS						EBX14AHL-BS	"LB14L-A2"
						EBX12-BS						EBX14AHL-BS	-
	GSX1300R Hayabusa	99-07	-	-	-	EB12A-BS						-	-



MOTORCYCLE BATTERY APPLICATIONS

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded	CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
SUZUKI							SUZUKI						
700	GV700GL Madura	85	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	"LB14L-B2"	425 400	GS425, GS425E, L DR-2400, E, S GN400T, X GS400 GS400X	79 00-14 80-82 77-78 77-78	- - - - -	- LT7B-4/EB7B-4	- - - - -	"LB10L-A2" - 6N4B-2A "LB10L-A2" "LB7-A" 12N7-4A
650	DL650 V-Strom	04-13	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	-							
	DL650 V-Strom, Adventure	04-13	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	-							
	DR650S EP, ES	94-95	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	-		GSF400 Bandit	91-93	MX9-4	LT9-4/EB7B-4	LTX9-BS EBX9-BS	-
	R650S, N, P	92-93	-	LT4-3 EB4-3	LTX4L-BS EBX4L-BS	-		SP400 TS400 Apache TS400 Apache	80 76-77 72-75	- - -	- - -	- - -	6N4B-2A 6N4B-2A "LB5L-B" 12N5-3B "LB7-A" 12N7-4A 6N4B-2A
	DR650S	90-91	-	-	-	"LB5L-B 12N5-3B"	380	GT380 Sebring	72-77	-	-	-	-
	DR650SE	98-14	MX9-4	LT9-4/EB9-4	LTX9-BS EBX9-BS	-	370	SP370	78-79	-	-	-	-
	DR650SE(CN)	96-97	MX9-4	LT9-4/EB9-4	LTX9-BS EBX9-BS	-	350	DR350S	90-96	-	LT4-3/EB4-3	LTX4L-BS EBX4L-BS	-
	DR650SE	96-97	-	-	-	"LB10L-B2"		DR350SE	94-99	-	LT7-3/EB7-3	LTX7L-BS EBX7L-BS	-
	GR650 Templar, X	83	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	"LB14L-A2"		T350 Series	79	-	-	-	"LB5L-B" 12N5-3B "LB5L-B" 12N5-3B "LB5L-B" 12N5-3B "LB12B-B2"
	GSX650F	08-11	MX9-4	LT9-4/EB9-4	LTX9-BS EBX9-BS	-	305	Scramble TC305	69	-	-	-	-
	GS650E	81-82	-	-	-	"LB10L-A2"						-	-
	CS650 (AB)	81-83	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	"LB14L-A2"		T305	69	-	-	-	-
	LS650 Savage, S40	86-14	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	"LB14L-B2"	300 250	GS300L DR250S	82-85 90-92	- -	LT4-3/EB4-3	LTX4L-BS EBX4L-BS	-
	SV650	99-02	-	-	-	-		DR250S EP, ER, ES	93-95	-	LT7-3/EB7-3	LTX7L-BS EBX7L-BS	-
	SV650A, SA	03-11	MX12-4	LT12-4/EB12-4	LTX12-BS EBX12-BS	-						-	-
	SV650S	03-13	MX12-4	LT12-4/EB12-4	LTX12-BS EBX12-BS	-		DR-Z250 GNZ50 GSZ50T	01-07 82-88 80-81	- - -	EBZ7-3	- - -	- "LB10L-A2" "LB10L-A2"
	SPV650 Gladus	09-14	-	-	-	-		GT250 Husler	73-77	-	-	-	"LB5L-B" 12N5-3B
	XN65 Turbo	83	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	"LB14L-A2"						-	-
620	QJ620F	05	-	-	-	-		GW250	13-14	MX9-4	LT9-4/EB7B-4	LTX9-BS EBX9-BS	-
600	GSF600S Bandit	96-03	MX9-4	LT9-4/EB9-4	LTX9-BS EBX9-BS	-		GZ250	99-12	-	LT7-3/EB7-3	LTX7L-BS EBX7L-BS	-
	GSX-R600	97-14	MX9-4	LT9-4/EB9-4	LTX9-BS EBX9-BS	-		Model T20	69	-	-	-	"LB5L-B" 12N5-3B 6N4B-2A "LB5L-B" 12N5-3B 6N4B-2A 6N2-2A-4
	GSX-R600W	92-03	MX9-4	LT9-4/EB9-4	LTX9-BS EBX9-BS	-		SP250 Scrambler TC250	82-85 69	- -	- -	- -	- -
	GSX600F Katana	88-96	MX9-4	LT9-4/EB9-4	LTX9-BS EBX9-BS	-		T250, T250L, T250J, T25OR TS250 Savage TS250 Savage TLZ50X	72 73-81 69-72 09-15	- - - -	- - - -	- - - -	
	GSX600F Katana	88-97	-	-	-	"LB10L-B2"		DR200SE	96-13	-	LT7-3/EB7-3	LTX7L-BS EBX7L-BS	-
	SP600	85	-	-	-	"LB5L-B 12N5-3B"						-	-
	RF600R, S	94-96	MX9-4	LT9-4/EB9-4	LTX9-BS EBX9-BS	-	200					-	-
550	GS550E, L, M, TX GS550E, ES, L	77-82 83-86	- -	- -	- -	"LB10L-A2" "LB10L-B"		SP200	86-88	-	-	-	"LB4L-B" "LB5L-B" 12N5-3B 12N11-3A-1 12N11-3A-1 6N4B-2A 6N4-2A
	GT550 Indy	72-77	-	-	-	"LB10L-B2" "LB10L-B2"		T200, TC200	-	-	-	-	-
	GS500, F	01-09	-	-	-	"LB7-A"	185	GT185 Adventure TC185 Ranger TS185 Sierra	73-77 74-77 77-81	- - -	- - -	- - -	
	GS500E	89-00	-	-	-	12N7-4A		TS185 Sierra	71-76	-	-	-	-
	SP500	81-83	-	-	-	6N4B-2A "LB7-A" 12N7-4A	125	DR125, SE, SES	94-96	-	LT7-3/EB7-3	LTX7L-BS EBX7L-BS	-
	TS500 Titan	68-75	-	-	-	"LB7-A 12N7-4A"						-	-
450	GS450	83-88	-	-	-	"LB12B-B2"		GN125, E	91-96	-	-	-	"LB7-A"
	GS450	80-82	-	-	-	"LB10L-A2"		GN125, E	82-83	-	-	-	"LB7-A"



MOTORCYCLE BATTERY APPLICATIONS

CC	Model	Year	MX	Factory A. divided Maintenance Free	Dry Charged Maintenance Free	Flooded	CC	Model	Year	MX	Factory A. divided Maintenance Free	Dry Charged Maintenance Free	Flooded
SUZUKI							YAMAHA						
125	RV125 SE, R	94	-	LT7-3EB7-3	LTX7L-BS EBX7L-BS	-	1300	XV513AY V-Star, Stryker	09-15	-	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	-
	RV125 Tracker	73-77	-	-	GN4-2A	-	1200	XT1200Z Super Tenere	11-14	-	EB212A-4	-	-
	SP125	86-88	-	-	GN4-2A	-		FJ1200 (All)	91-93	MX144	LT14-4	LTX14-BS	-
	SP125	82-83	-	-	GN4B-2A	-					EB14C-4	EBX14-BS	-
	TC125 Prospector	73-77	-	-	GN4B-2A	-		FJ1200	86-90	MX15-3	LT14A-3	LTX14AHL-BS	*LB14L-A2
	TS125 Duster	71-81	-	-	GN4B-2A	-					EB14A-3	EBX14AHL-BS	-
120	B120P	-	-	-	GN4-2A	-		VMAX12 V-Max	85-87	-	-	-	*LB16AL-A2
	TC120, TC120R, TC120R	71	-	-	GN4B-2A	-		XVZ12 Venture	83-85	MX18-3	LT24-3EB24-3+	LTX24HL-BS	*SL50-N18L-AT
105	B105P	-	-	-	GN4-2A	-	1100	Royale	-	-	-	EBX24HL-BS+	-
100	A100 Go-Racer	76-77	-	-	GN4-2A	-		FJ1100	84-85	MX15-3	LT14A-3	LTX14AHL-BS	*LB14L-A2
	A100 Go-Racer	69	-	-	GN4-2A	-					EB14A-3	EBX14AHL-BS	-
	B100P	-	-	-	GN4-2A	-		XJ1100 Maxim	82	MX18-3	LT24-3	LTX24HL-BS	*SL50-N18L-AT
	SP100	83	-	-	GN4B-2A	-					EB24-3+	EBX24HL-BS+	-
	Scrambler AC100	69	-	-	GN4-2A	-		XS1100 (All)	78-81	MX18-3	LT24-3	LTX18L-BS	*L50-N18L-A3
	Sport AS100	69	-	-	GN4-2A	-					EB24-3	EBX18L-BS	-
	TC100 Blazer	73-77	-	-	GN4-2A	-		XV1100 Virago (All)	86-99	MX18-3	LT24-3	LTX18L-BS	*L50-N18L-A3
	TS100 Honcho	78-81	-	-	GN4B-2A	-					EB24-3	EBX18L-BS	-
	TS100 Honcho	73-77	-	-	GN4-2A	-	1000	XV51100 V-Star (All)	99-10	-	LT14B-4EB14B-4	-	-
90	RV90 Rover	73-77	-	-	GN4B-2A	-		FZR1000	91-95	MX144	LT14-4	LTX14-BS	-
	TC90	-	-	-	GN4-2A	-					EB14C-4	EBX14-BS	-
	RV90 Rover	72	-	-	GN2-2A-4	-		FZR1000	87-90	MX15-3	LT14A-3	LTX14AHL-BS	*LB14L-A2
	TC90J, TC90R	-	-	-	GN2-2A-4	-					EB14A-3	EBX14AHL-BS	-
	Model K10/Model K10P	68	-	-	GN4-2A	-		FZS1000 FZ1	01-05	-	-	EB14B-BS	-
80	Sport 80 (Models K115K115P)	68	-	-	GN4-2A	-		FZS1000 FZ1	06-14	-	EB214A-4	-	-
	Trail 80 (Models K15K15P)	68	-	-	GN4-2A	-		GTS1000	93-94	MX144	LT14-4	LTX14-BS	-
75	TS75 Colt	75-77	-	-	GN4-2A	-					EB14C-4	EBX14-BS	-
70	DR-Z70	08-09	-	-	LT4B-BS	-		XV1000 Virago	84-85	MX18-3	LT24-3	LTX18L-BS	*L50-N18L-A3
55	Model 31	68	-	-	-	-					EB24-3	EBX18L-BS	-
50	AC50, AS50	71	-	-	GN4-2A	-		YZF-R1	99-03	-	LT12B-4EB12B-4	-	*L50-N18L-A2
	CR50	79-80	-	-	GN4B-2A	-		YZF-R1	04-14	-	EB210A-4	-	-
	Sport 50 (Model M12)	68	-	-	GN4-2A	-		YZF1000R	97-98	MX144	LT14-4	LTX14-BS	-
	TS50J, TS50K	74	-	-	GN4-2A	-	950	XV950CT, Y V-Star	09-15	-	EB214A-4	-	-
	TS50L, TS50R	74	-	-	GN4-2A	-	900	Bot. R-SPEC	14-15	-	EB214A-4	-	-
YAMAHA								XV900 Virago	82	MX18-3	LT24-3EB24-3+	LTX24HL-BS	*SL50-N18L-AT
1854	Roadliner, Stratoliner	06-14	MX16-4	LT14B-4 EB14B-4	-	-		XV900M Midnight-Virago	83	MX18-3	LT24-3EB24-3	LTX18L-BS	*L50-N18L-A2
	Raido	08-15	MX16-4	LT14B-4 EB14B-4	-	-		XV900R Virago	81-83	MX18-3	LT24-3EB24-3	LTX18L-BS	*L50-N18L-A2
1700	VMAX	09-15	-	-	EB214A-4	-					LT24-3EB24-3	LTX18L-BS	*L50-N18L-A2
	XV1700 Road Star - Warrior	04-09	-	-	LT14B-4 EB14B-4	-	900	TDN500 (EU)	02-13	-	LT12B-4EB12B-4	-	*L50-N18L-A2
	XV1700A Road Star, Silverado	08-14	-	-	LT20-3EB20-3	-	850	XJ900R Seca	83	MX15-3	LT14A-3	LTX14AHL-BS	*LB14L-A2
	MT-01 (EU)	05-12	-	-	LT20-3EB20-3	-					EB14A-3	EBX14AHL-BS	-
1600	XV1600 Road Star (All)	99-03	-	-	LT20-3EB20-3	-		FZ-09	14-15	-	EB210A-4	-	-
1300	FJR1300, A	03-15	-	-	LT14B-4 EB14B-4	-		TDN850	92-93	MX12-4	LT12-4	LTX12-BS	-
	XVZ13 Royal Star Venture (All)	95-12	-	-	LT20-3 EB20-3	-		TRX850	95-99	MX12-4	LT12-4	LTX12-BS	-
	XVZ13 Venture	86-93	MX18-3	LT24-3EB24-3+	LTX20L-BS EBX20L-BS	-					EB12-4	EBX12-BS	-
	Royal	-	-	-	EBX24HL-BS+	-		XS850 (All)	80-81	MX15-3	LT14A-3	LTX14AHL-BS	*LB14L-A2
	XJR1300 (EU)	07-13	-	-	EB214A-4	-	800				EB14A-3	EBX14AHL-BS	-
							750	FZ8	11-13	-	EB210A-4	-	-
								FZ750	85-88	MX15-3	LT14A-3	LTX14AHL-BS	*LB14L-A2
											EB14A-3	EBX14AHL-BS	-
								FZR750	87-88	MX15-3	LT14A-3	LTX14AHL-BS	*LB14L-A2
								Tr750	73-74	-	EB16B-3	EB16BL-BS	*LB16L-B

* This battery includes a sensor. + Eliminates need for sensor (needs to be disabled)



MOTORCYCLE BATTERY APPLICATIONS

CC	Model	Year	MX	Factory A. divided Maintenance Free	Dry Charged Maintenance Free	Flooded	CC	Model	Year	MX	Factory A. divided Maintenance Free	Dry Charged Maintenance Free	Flooded
YAMAHA							YAMAHA						
750	XJ750 Maxim	82-83	MX15-3	LT14A-3 EB14A-3+	LTX14AHL-BS EBX14AHL-BS+	*LB14L-A2	550	XJ Maxim, R Seca	81-83	-	-	-	*LB12A-A 12N12A-4A-1
	XJ750M Midnight-Maxim	83	MX15-3	LT14A-3	LTX14AHL-BS	*LB14L-A2		XT950	82-83	-	-	-	*LB5L-B 12N5-3B
	XJ750R Seca	81-83	MX15-3	EB14A-3 EB14A-3+	EBX14AHL-BS EBX14AHL-BS+	*LB14L-A2		XZ550R Vision	82-83	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
	XS750 (All)	77-79	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2	535	XV535 Virago	87-89	-	-	-	*LB12AL-A2
	XV750 Virago (All)	81-86	-	-	-	*LB16AL-A2	500	SR500	78-81	-	-	-	*LB7L-B 12N7-3B
	YZF750R	94-98	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	-		TX500	73-74	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2 12N14-3A2
	YZF-R7	99	-	-	LT9B-4EB9B-4	-		XS500	75-78	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2 12N14-3A2
700	FZ700	87	MX15-3	LT14A-3	LTX14AHL-BS	*LB14L-A2		XT800	76-81	-	-	-	*LB12A-A 12N12A-4A-1
	FZX700 Fazer	86-87	MX15-3	EB14A-3 EB14A-3	EBX14AHL-BS EBX14AHL-BS	*LB14L-A2	490	WR490F	03-15	-	EB27-3	-	*LB5-3B-1 6N5-2A-3
	XJ700 Maxim	85-86	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2	400	DT400 Enduro	77-78	-	-	-	*LB12AL-A2 12N12A-4A-1
	XJ700X	85	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2		FZR400 (All)	88-90	-	-	-	*LB7L-B
	XV700 Virago	84-87	-	-	-	*LB16AL-A2		SR400	01-15	-	-	-	LT4B-BS
600	XT600X, FZ Tenere (EU)	04-13	-	-	LT9B-4EB9B-4	-		SR400(FI)	10-13	-	-	-	LT4B-BS
	MT-03 (EU)	05-13	-	-	LT9B-4EB9B-4	-	650	TX650	74	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2 12N14-3A2
								TX650	73	-	-	-	*LB12A-A 12N12A-4A-1
	XJ650 (All)	80-83	-	-	-	*LB12A-A	360	DT360 Enduro	74	-	-	-	*LB12A-A 12N12A-4A-1
	XS1	70-71	-	-	-	*LB12A-A		RT1, RT1B 360 Enduro	70-71	-	-	-	*LB12A-A 12N12A-4A-1
	XS2	72	-	-	-	*LB12A-A		RT2, RT3 360 Enduro	72-73	-	-	-	*LB12A-A 12N12A-4A-1
	XS650	75-83	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2		XS360	76-78	-	-	-	*LB7L-B 12N7-3B
	XV650 V-Star (All)	88-15	-	-	-	*LB14L-A2	350	BW350 Big Wheel	87-88	-	-	-	*LB12B-B2 12N5-3B
								R3	69	-	-	-	*LB5L-B 12N5-3B
600	FJ600	84-85	-	-	-	*LB12A-A		R5, R5B, R5C	70-72	-	-	-	*LB12A-A 12N12A-4A-1
	FZ6, R	05-14	-	-	-	*LB12A-A		RD350	73-75	-	-	-	*LB12A-A 12N12A-4A-1
	FZ600	86-88	-	-	-	*LB12A-A		RZ350	84-85	-	-	-	*LB12A-A 12N12A-4A-1
	FZR600R	89-99	-	-	-	*LB12A-A		XT350	85-08	-	-	-	*LB12A-A 12N12A-4A-1
	SR600	86	-	-	-	*LB12A-A	250	YR250	68	-	-	-	*LB12A-A 12N12A-4A-1
	XJ800S Seca II	92-98	MX9-4	LT9-4 EB9-4	LTX9-BS EBX9-BS	-		D57	72	-	-	-	*LB12A-A 12N12A-4A-1
	XJ6, Develon (EU)	09-13	-	-	-	*LB12A-A		DT1 250 Enduro	68	-	-	-	*LB12A-A 12N12A-4A-1
	XT600	84-89	-	-	-	*LB5L-B		DT1B, DT1C	69-71	-	-	-	*LB12A-A 12N12A-4A-1
	XT600E	90-95	MX9-4	LT9-4EB9-4	LTX9-BS EBX9-BS	-		DT1E 250 Enduro	71-72	-	-	-	*LB12A-A 12N12A-4A-1
	YX600Radian	86-90	-	-	-	*LB12A-A		DT2 250 Enduro	72	-	-	-	*LB12A-A 12N12A-4A-1
	YZF-R6, R6S	01-07	-	-	-	*LB12A-A		DT250 Enduro	77-79	-	-	-	*LB12A-A 12N12A-4A-1
	YZF-R6 (Excl. R6S)	06-15	-	-	-	*LB12A-A		DT250 Enduro	74-76	-	-	-	*LB12A-A 12N12A-4A-1
	YZF-R6	99-00	-	-	-	*LB12A-A		DT3 250 Enduro	73	-	-	-	*LB12A-A 12N12A-4A-1
	YZF600R	95-07	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	-		RD250	73-75	-	-	-	*LB12A-A 12N12A-4A-1
								SR250 Exciter	80-82	-	-	-	*LB12A-A 12N12A-4A-1
								SRV250	87	-	-	-	*LB12A-A 12N12A-4A-1
								TTT250	99-06	-	-	-	*LB12A-A 12N12A-4A-1
								WR250F	03-09	-	-	-	*LB12A-A 12N12A-4A-1



MOTORCYCLE BATTERY APPLICATIONS

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded	CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
YAMAHA							YAMAHA						
250	WR250XR	08-15	-	EB27-3	-	-	125	Ref125	75-76	-	-	EBX4-BS	12N5.5A-3B
	XT250	08-15	-	EB27-3	-	-		DT125 Enduro	74-76	-	LT4-3EB4-3	LTX4L-BS	12N7L-B
	XT250	84	-	-	-	12N3L-B							12N7-3B
	XT250	80-83	-	-	-	6N6-3B-1		TTR125ALE (Elec)	03-15	-	LT4-3EB4-3	LTX4L-BS	-
	XT250 Serow	05-13	-	EB27-3	LTX7L-BS	-						EBX4L-BS	-
	XV250 Virago	05-03	-	-	-	12N10L-A2		XT125	82-83	-	-	-	6N4A-4D
	XV250 Roadster 66	88-90	-	-	-	12N10L-A2		YAS10C	88	-	-	-	12N5.5-3B
	XV250OR V-Star	09-15	-	-	-	12N10L-A2		TTR125ALE (Elec)	08-15	-	-	-	-
	Tricker	-13	-	EB27-3	-	-		DT100 Enduro	77-83	-	-	LT4B-BS	6N4-2A-5
230	TTR230E	06-15	-	LT5-3EB5-3	LTX5L-BS	-		DT100 Enduro	74-76	-	-	-	6N4B-2A-3
					EBX5L-BS	-		LST, LSTA	89-70	-	-	-	12N7-3B
225	TTR225	09-05	-	LT7B-4EB7B-4	-	-		LS2	72	-	-	-	12N5.5A-3B
	XT225	01-07	-	EB27-3	-	-		LT2, LT3 100 Enduro	72	-	-	-	6N4A-4D
	XT225 Serow	02-00	-	LT7-3EB7-3	EBX7L-BS	-		Ref100	75-76	-	-	-	12N7-3B
300	BNV200E Big Wheel (Elec Start)	86-88	-	-	-	12N7C-A		YL200CM	88	-	-	LT4B-BS	12N5.5-3B
	CS3B, CS3C	70-71	-	-	-	12N9-3A-1		HS1, HS1B	70-71	-	-	-	6N2-2A-3
	CS5	72	-	-	-	12N9-3A-1		HT1, HT1B 90 Enduro	70-71	-	-	-	-
	RD200	74-76	-	-	-	12N9-3A-1		*TTR90E (Elec Start) *	03-07	-	-	-	6N4-2A-5
	TW200 Trailway	87-09	-	-	-	12N9-3A-1	80	DT80 Mini Enduro	81-83	-	-	-	6N4A-4D
	XT200	82-83	-	-	-	12N9-3A-1		G65, G65B	70-71	-	-	-	6N4A-4D
	YCS1	68	-	-	-	12N9-3A-1		G7S	72	-	-	-	6N4A-4D
185	SR185 Exciter	81-82	-	-	-	12N9-3A-1		GT1 Mini Enduro	73	-	-	-	6N4-2A-5
175	CT1, CT1B	89-71	-	-	-	12N7L-B		GT80 Mini Enduro	74-80	-	-	-	6N4A-4D
	CT1C 175 Enduro	-	-	-	-	6N4A-4D		LB80 Chappy	76-78	-	-	-	12N7-3B
	CT2, CT3 175 Enduro	72-73	-	-	-	6N6-3B-1	60	JT2 Mini Enduro	72	-	-	-	6N2-2A-3
	DT175 Enduro	78-81	-	-	-	12N5.5-3B		RD60	73-75	-	-	-	6N4A-4D
	DT175 Enduro	74-76	-	-	-	12N7-3B	50	DT50 Enduro	86-90	-	-	-	6N4B-2A-3
125	AS2C	69	-	-	-	12N7-3B		LB50P Chappy	78-82	-	-	-	6N4-2A-5
	AT1E, AT1B	69-71	-	-	-	12N7-3B		LC50 Champ	80-81	-	-	-	6N4-2A-5
	AT1C 125 Enduro	-	-	-	-	12N7-3B		MJ50 Towey	82	-	-	-	6N4-2A-5
	AT2, AT3 125 Enduro	72-73	-	-	-	12N7-3B		QT50 Yamahaopper	79-87	-	-	LT4B-BS	6N4-2A-5
	DT125 Enduro	78-81	-	-	-	12N7-3B		RV50 Special	83-84	-	-	-	6N4-2A-5
						12N7-3B		TTR50E	08-15	-	-	-	-
						12N7-3B		YSR50	87-92	-	-	-	6N4-2A-5



ALL TERRAIN VEHICLE BATTERY APPLICATIONS

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded	CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
ARCTIC CAT							ARCTIC CAT						
700	TRV700	-09	MX15-4	LT14A-4	LTX14AH-BS	12N14A-2	300	All Models	-09	MX15-3	LT14A-3	LTX14AH-BS	12N14A-2
				EB14A-4	EBX14AH-BS	-					EB14A-3	EBX14AH-BS	-
650	850H1, TRX650	05-12	MX15-4	LT14A-4	LTX14AH-BS	12N14A-2	250	250	-10	MX12-4	LT12-4	LTX12-BS	-
				EB14A-4	EBX14AH-BS	-					EB12-4	EBX12-BS	-
	4x4 Automatic	04-06	MX15-4	LT14A-4	LTX14AH-BS	12N14A-2		All Models	-05	MX15-3	LT14A-3	LTX14AH-BS	12N14A-2
				EB14A-4	EBX14AH-BS	-					EB14A-3	EBX14AH-BS	-
500	All Models	All	MX15-4	LT14A-4	LTX14AH-BS	12N14A-2		DVX250, 204	06	MX12-4	LT12-4	LTX12-BS	-
				EB14A-4	EBX14AH-BS	-					EB12-4	EBX12-BS	-
400	TRV400	-10	MX15-4	LT14A-4	LTX14AH-BS	12N14A-2	150	150	-13	MX9-4	LT9-4	LTX9-BS	-
				EB14A-4	EBX14AH-BS	-					EB9-4	EBX9-BS	-
	DVX400	All	MX9-4	LT9-4	LTX9-BS	-	90	All Models	-06	-	LT4-3	LTX4L-BS	-
				EB9-4	EBX9-BS	-					EB4-3	EBX4L-BS	-
	All Other Models	All	MX15-4	LT14A-4	LTX14AH-BS	12N14A-2		DVX90	08-14	-	LT5-3	LTX5L-BS	-
				EB14A-4	EBX14AH-BS	-					EB5-3	EBX5L-BS	-
300	300	08-12	MX15-4	LT14A-4	LTX14AH-BS	12N14A-2		90,90 Utility	-14	-	LT5-3	LTX5L-BS	-
				EB14A-4	EBX14AH-BS	-					EB5-3	EBX5L-BS	-
300	DVX300	08-14	MX12-4	LT12-4	LTX12-BS	-	50	DVX50	06-10	-	LT5-3	LTX5L-BS	-
				EB12-4	EBX12-BS	-					EB5-3	EBX5L-BS	-

*** *Type*: High performance flooded battery, for example, 12N3L-B



ALL TERRAIN VEHICLE BATTERY APPLICATIONS

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded	CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
SUZUKI							SUZUKI						
750	LT-A750X King Quad	07-14	-	-	-	LTX20CH-BS EBX20CH-BS	250	LT-Z250 QuadSport	04-09	MX9-4	LT9-4 EB9-4	LTX9-BS EBX9-BS	-
700	LT-A700X King Quad	05-07	-	-	-	LTX20CH-BS EBX20CH-BS		LTZ50EQuadRunner	85-86	-	-	LTX24H-BS EBX24H-BS	12N4N18A-A
	LT-V700F Twin Peaks	04-05	-	-	-	LTX20CH-BS EBX20CH-BS	230	LT-F230 QuadRunner LTZ30E QuadRunner	85-87 88-93	- MX12-4	- LT12-4 EB12-4	- LTX12-BS EBX12-BS	12N10A-A2
500	LT-A500 King Quad	05-14	-	-	-	LTX20CH-BS EBX20CH-BS		LTZ30GE QuadRunner	85-86	-	-	-	12N10A-A2
	LT-A500F Vinson 4WD	04-07	-	-	-	LTX20CH-BS EBX20CH-BS	160	LT-F160 QuadRunner LT-F160 QuadRunner	91-01 03-04	- -	- -	- -	12N9A-A 12N9A-A
	LT-A500F Vinson 4WD	02-03	-	-	-	LTX16-BS EBX16-BS*	90	LT160E QuadRunner LTZ30 QuadSport	89-94 07-09	- -	- LT7A-4 EB7A-4	- LTX7A-BS EBX7A-BS	12N9A-A 12N9A-A
	LT-A500F Quad Master	00-01	-	-	-	LTX16-BS-1							
	LT-A500F Quad Runner	98-02	-	-	-	LTX16-BS-1	80	LT80 QuadSport 80	87-06	-	-	LTX5L-BS EBX5L-BS	-
	LT-F500F Vinson, Manual 4WD	04-07	-	-	-	LTX20CH-BS EBX20CH-BS	90	QuadSport 250	06-09	-	-	LTX5L-BS EBX5L-BS	-
	LT-F500F Vinson, Manual 4WD	03	-	-	-	LTX16-BS EBX16-BS*	QIAN JIANG						
450	LT-A450X King Quad	07-11	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	-	100	ATV100		-	LT4-3 EB4-3	LTX4L-BS EBX4L-BS	-
	LT-R450 QuadRacer	06-11	-	-	-	-	50	ATV50		-	LT4-3 EB4-3	LTX4L-BS EBX4L-BS	-
400	LT-A400 Elger 2WD, F Elger 4WD	02-07	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	-	HONDA						
	LT-A400F KingQuad	-09	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	-	700	TRX700X	08-13	MX9-4	LT9-4 EB9-4	LTX9-BS EBX9-BS	-
	LT-A400F KingQuad	13-14	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	-	680	TRX680 FourTrax Rincon	05-14	-	-	LTX20L-BS EBX20L-BS	-
	LT-F400 Elger 2WD, F Elger 4WD	02-07	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	-	650	TRX650 FourTrax Rincon (Std)	03-05	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	-
	LT-Z400 Quad Sport	13-14	MX9-4	LT9-4 EB9-4	LTX9-BS EBX9-BS	-		(Optional Cold Starting)	03-04	-	-	LTX20L-BS EBX20L-BS	-
	LT-A400 King Quad	-13	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	-	500	TRX500FE,FPE,FM,FPM	11-14	MX14-4	-	-	-
300	LT-Z400 QuadSport	03-14	MX9-4	LT9-4 EB9-4	LTX9-BS EBX9-BS	-		TRX500F FourTrax, Rubicon	01-11	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	-
	LT300E Quad Runner, 300E	87-89	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	12N14A-A2		TRX500FE, FM, TM, FourTrax Foreman, ES, 4x4	05-11	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	-
	LT-F300F KingQuad	99-02	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	12N14A-A2	450	TRX450ER, TRX450ER	06-13	-	-	EB27-3	-
	LT-F300F King Quad, (CN, Opt)	99-02	-	-	-	12N14A-A2		TRX450, FourTrax, Foreman S, ES	98-04	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	-
	LT-F300F King Quad, (CN, Opt)	99-02	-	-	-	12N14A-A2		TRX450ER	06-09	-	-	EB27-3	-
280	LT-F4WDX KingQuad	91-99	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	12N14A-A2	420	TRX420 Rancher 4x4	-13	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	-
	LT-F4WDX King Quad (CN, Opt)	91-99	-	-	-	12N14A-A2		TRX420 Rancher 4x4	14-15	MX14-4	-	-	-
	LT-F4WDX King Quad (CN, Opt)	91-99	-	-	-	12N14A-A2		TRX420 Rancher 2x4	-14	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	-
250	LT-4WD QuadRunner	87-89	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	12N14A-A2	400	FL400R Pilot	89-90	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	-
	LT-4WD Quad Runner (Opt)	87-89	-	-	-	12N14A-A2		TRV400EX, FourTrax, Sportrax	95-13	MX9-4	LT9-4 EB9-4	LTX9-BS EBX9-BS	-
	LT-F250 QuadRunner	88-01	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	12N14A-A2		TRX400 Rancher AT, TRX400FW	04-06	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	-
	LT-F250 Quad Runner, (Opt)	88-01	-	-	-	12N14A-A2		Foreman	95-03	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	-
	LT-F250, F Ozark	02-14	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	-	350	FL350R Odyssey	85	-	-	LTX12-BS EBX12-BS	-
	LT-F250F QuadRunner	99-02	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	12N14A-A2		TRX350, D FourTrax 4x4	86-89	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	-
	LT-F250F Quad Runner (CN, Opt)	99-02	-	-	-	12N14A-A2		TRX350 Rancher	00-06	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	-



ALL TERRAIN VEHICLE BATTERY APPLICATIONS

CC	Model	Year	MX	Factory Act. vated Maintenance Free	Dry Charged Maintenance Free	Flooded	CC	Model	Year	MX	Factory Act. vated Maintenance Free	Dry Charged Maintenance Free	Flooded	
HONDA							KAWASAKI							
300	TRX300 FourTrax 300	88-00	MX14-4	LT14-4 EB14C-4	LT14-4BS EBX14-4BS	-	750	KVF750-A, B Brute Force 750 4x4	05-14	-	LT14-4EB14C-4 LT14-4EB14C-4	-	-	
	TRX300EX, Sportrax	93-12	MX9-4	LT9-4 EB9-4	LT9-4BS EBX9-4BS	-	700	KFX700 V-Force	03-10	-	LT14-4EB14C-4	-	-	
	TRX300FW, FourTrax 300 4x4	88-00	MX14-4	LT14-4 EB14C-4	LT14-4BS EBX14-4BS	-		KSV700-A,B (KFX700)	04-08	-	LT14-4EB14C-4	-	-	
250	ATC250ES Big Red	85-87	MX12-4	LT12-4 EB12-4	LT12-4BS EBX12-4BS	-		KSV700-A,B Prairie 700 4x4	04-06	-	LT14-4 EB14C-4	-	-	
	ATC250SX	85-87	MX12-4	LT12-4 EB12-4	LT12-4BS EBX12-4BS	-	650	KVF650 Brute Force	02-13	-	LT14-4EB14C-4	-	-	
	TRX250 FourTrax	85-87	MX12-4	LT12-4 EB12-4	LT12-4BS EBX12-4BS	-	450	KV650-A,B,D,E Prairie 650, 4x4	02-11	-	LT14-4/EB14C-4	-	-	
	TRX250 FourTrax, Recon ES	97-09	MX12-4	LT12-4 EB12-4	LT12-4BS EBX12-4BS	-	400	KFX400R	08-14	-	LT7-3 EB7-3	LTX7L-BS EBX7L-BS	-	
	TRX250EX, TE, TM	01-13	MX9-4	LT9-4 EB9-4	LT9-4BS EBX9-4BS	-		KLF400-B Bayou 400 4x4	93-00	-	LT16C-3	LT16CL-BS	*LB16CL-B	
200	ATC200 Big Red	82-84	MX15-4	LT14A-4 EB14A-4	LT14AH-4BS EBX14AH-4BS	*LB14AA-A2		KSF400-A (KFX400)	03-06	MX9-4	LT9-4 EB9-4	LT9-4BS EBX9-4BS	-	
	ATC200M	84-85	MX15-4	LT14A-4 EB14A-4	LT14AH-4BS EBX14AH-4BS	*LB14AA-A2		KVF400-A Prairie 4x4	97-00	MX15-4	LT14A-4 EB14A-4	LT14AH-4BS EBX14AH-4BS	*LB14AA-A2	
	TRX200 FourTrax	90-97	-	LT12-4 EB12-4	LT12-4BS EBX12-4BS	-		KVF400-A, Prairie 400 4x4 (CN)	97-00	-	LT16C-3	LT16CL-BS	*LB16CL-B	
	TRX200 FourTrax	84	MX15-4	LT14A-4 EB14A-4	LT14AH-4BS EBX14AH-4BS	*LB14AA-A2		KVF400-B, Prairie 400 4x4 (CN)	98-00	MX15-4	LT14A-4 EB14A-4	LT14AH-4BS EBX14AH-4BS	*LB14AA-A2	
	TRX200SX FourTrax	86-88	MX12-4	LT12-4 EB12-4	LT12-4BS EBX12-4BS	-		KVF400-C, Prairie 400, 4x4	99-02	-	LT16C-3	LT16CL-BS	*LB16CL-B	
125	ATC125M	86-87	MX12-4	LT12-4 EB12-4	LT12-4BS EBX12-4BS	-		KVF400-C, Prairie 400, 4x4	99-02	-	LT14A-4 EB14A-4	LT14AH-4BS EBX14AH-4BS	*LB14AA-A2	
	ATC125M	84-85	-	-	-	*LB9A-A		KVF400-D, Prairie 400 4x4 (CN)	99-01	MX14-4	LT14-4 EB14C-4	LT14-4BS EBX14-4BS	-	
	TRX125 FourTrax	87-88	MX9-4	LT9-4 EB9-4	LT9-4BS EBX9-4BS	-	360	KVF360 Prairie	-13	MX15-4	LT14A-4 EB14A-4	LT14AH-4BS EBX14AH-4BS	*LB14AA-A2	
	TRX125 FourTrax	85-86	-	-	-	*LB9A-A		KVF360-A,B,C Prairie 360, 4x4	03-11	MX15-4	LT14A-4 EB14A-4	LT14AH-4BS EBX14AH-4BS	*LB14AA-A2	
90	TRX90EX	06-15	-	LT5-3 EB5-3	LT5SL-BS EBX5SL-BS	-	300	KEF300-A Lakota	95-00	MX15-4	LT14A-4 EB14A-4	LT14AH-4BS EBX14AH-4BS	*LB14AA-A2	
JOHN DEERE								KEF300-B, Lakota Sport	01-03	MX15-4	LT14A-4 EB14A-4	LT14AH-4BS EBX14AH-4BS	*LB14AA-A2	
All Models				All	LT16C-3	LT16CL-BS	*LB16CL-B		KLF300-A Bayou	86-87	-	LT16C-3	LT16CL-BS	*LB16CL-B
KASEA								KLF300-B Bayou	88-04	MX15-4	LT14A-4 EB14A-4	LT14AH-4BS EBX14AH-4BS	*LB14AA-A2	
250	Skyhawk 250	All	-	LT7A-4/EB7A-4	LT7A-4BS	-		KLF300-B, Bayou (CN)	92-99	-	LT16C-3	LT16CL-BS	*LB16CL-B	
170	Skyhawk 170	All	-	LT7A-4 EB7A-4	LT7A-4BS EBX7A-4BS	-		KLF300-C, Bayou 300 4x4	89-04	MX15-4	LT14A-4 EB14A-4	LT14AH-4BS EBX14AH-4BS	*LB14AA-A2	
150	Skyhawk 150, Adventure Buggy	All	-	LT7A-4 EB7A-4	LT7A-4BS EBX7A-4BS	-		KVF300 Brute Force	13-14	MX12-4	LT12-4 EB12-4	LT12-4BS EBX12-4BS	-	
125	KSJ Models, Adventure Buggy	All	-	LT7A-4 EB7A-4	LT7A-4BS EBX7A-4BS	-		KVF300-A, Prairie 300, 4x4	99-02	MX15-4	LT14A-4 EB14A-4	LT14AH-4BS EBX14AH-4BS	*LB14AA-A2	
90	Skyhawk 90	All	-	LT5-3 EB5-3	LT5SL-BS EBX5SL-BS	-		KVF300-A, Prairie 300 4x4 (CN)	99-01	-	LT16C-3	LT16CL-BS	*LB16CL-B	
65	KSJ Models	All	-	LT7A-4 EB7A-4	LT7A-4BS EBX7A-4BS	-		KVF300-B, Prairie 300, 4x4	99-02	MX15-4	LT14A-4 EB14A-4	LT14AH-4BS EBX14AH-4BS	*LB14AA-A2	
	KSJ Models	All	-	LT7A-4 EB7A-4	LT7A-4BS EBX7A-4BS	-	250	KVF300-B, Prairie 300 4x4 (CN)	99-02	-	LT16C-3	LT16CL-BS	*LB16CL-B	
50	Mini Skyhawk	All	-	LT4-3 EB4-3	LT4L-BS EBX4L-BS	-		KLF250-A Bayou	03-12	-	LT14A-4	LT14AH-4BS	*LB14AA-A2	
	Skyhawk 50	All	-	LT5-3 EB5-3	LT5SL-BS EBX5SL-BS	-		KLF250-A, Bayou (CN)	03-05	MX15-4	LT14A-4 EB14A-4	LT14AH-4BS EBX14AH-4BS	*LB14AA-A2	
								KL250-A	82-83	-	-	-	*LB12A-A	
								KL250-C Prairie	84-85	-	-	-	*LB10L-B	
								KL250-D Prairie	83	-	-	-	*LB12A-A	
								KL220-A Bayou	88-02	-	-	-	*LB10A-A2	
								KL220-B, Bayou (CN)	92-02	MX15-4	LT14A-4 EB14A-4	LT14AH-4BS EBX14AH-4BS	*LB14AA-A2	

*Must use adaptor kit available from Buell. *** = "Type", High performance flooded battery, for example, "LB16-B"



ALL TERRAIN VEHICLE BATTERY APPLICATIONS

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded	CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
KAWASAKI							POLARIS						
200	KL2300-A, C	81-84	-	-	-	*LB10L-B	1000	Scrambler	14	MX20-3	-	-	-
	KL2300-B, C	83	-	-	-	*LB12A-A	850	Scrambler	14	MX20-3	-	-	-
185	KL185-A Bayou	85-88	-	-	-	*LB10L-B		Sportsman	09-14	MX30-3	-	-	-
110	KL110-B Mojave (Elec.Star)	87-88	-	-	-	*LB9L-A1	800	Sportsman	14	MX20-3	-	-	-
90	KFX90	07-14	LT5-3 EB5-3	LT5SL-BS EB5SL-BS	-	-		Sportsman 6x6	14	MX30-3	-	-	-
80	KSF80-A (KFX80)	03-05	LT5-3EB5-3	LT5SL-BS EB5SL-BS	-	-		Sportsman 6x6	05-14	MX30-3	LT30-3EB30-3	EBX30L-BS	-
50	KFX50	07-14	LT5-3EB5-3	LT5SL-BS EB5SL-BS	-	-		Sportsman 4x4	11-13	MX20-3	-	-	-
E-TON							700	Sportsman, Military	02-10	MX30-3	LT30-3EB30-3	EBX30L-BS	*LB30L-B
							600	Sportsman	04-05	MX30-3	LT30-3EB30-3	EBX30L-BS	*LB30L-B
							570	Sportsman	14	MX15-4	LT14A-4 EB14A-4	LT14AH-BS EB14AH-BS	*LB14AA-A2
250	Vector250	-13	LT12-4 EB12-4	LT12-4BS EB12-4BS	-	-	550	Sportsman	09	MX20-3	-	-	-
150	Viper 150R	-13	MX9-4	LT9-4 EB9-4	LT9-4BS EB9-4BS	-		Sportsman EPS,X2, Touring	10-14	MX15-4	LT14A-4 EB14A-4	-	-
	CXL 150 Yukon II	00-13	MX9-4	LT9-4 EB9-4	LT9-4BS EB9-4BS	-		Sportsman Touring,XP,XC	09-10	MX20-3	-	-	-
	YXL 150 Yukon	00-01	MX9-4	LT9-4 EB9-4	LT9-4BS EB9-4BS	-		Sportsman X2	10-12	MX20-3	-	-	-
90	AXL, TXL, NXL, RXL	99-03	-	LT4-3 EB4-3	LT4L-BS EB4L-BS	-	525	Outlaw 525	08-12	MX9-4	LT9-4 EB9-4	LT9-4BS EB9-4BS	-
	All Models	04-13	-	LT5-3 EB5-3	LT5SL-BS EB5SL-BS	-	500	All Models (Excl.Predator)	99-12	MX15-4	LT14A-4 EB14A-4	LT14AH-BS EB14AH-BS	*LB14AA-A2
								Predator	03-06	MX9-4	LT9-4 EB9-4	LT9-4BS EB9-4BS	-
	DXL90 Samia	00-03	-	LT5-3 EB5-3	LT5SL-BS EB5SL-BS	-		Sportsman	-09	-	-	EBX30L-BS	*LB30L-B
70	Viper70	-13	-	LT5-3 EB5-3	LT5SL-BS EB5SL-BS	-	450	Outlaw 450	07-10	MX9-4	LT9-4 EB9-4	LT9-4BS EB9-4BS	-
50	AXL, TXL, NXL, RXL	99-03	-	LT4-3EB4-3	LT4L-BS EB4L-BS	-		Outlaw 450 (primary)	99-03	MX30-3	LT30-3 EB30-3	EBX30L-BS	*LB30L-B
	All Models	04-05	-	LT5-3EB5-3	LT5SL-BS EB5SL-BS	-		(secondary)	99-03	MX15-4	LT14A-4 EB14A-4	LT14AH-BS EB14AH-BS	*LB14AA-A2
KYMC							425	All models	95-02	MX15-4	LT14A-4 EB14A-4	LT14AH-BS EB14AH-BS	*LB14AA-A2
700	MXU700	-14	-	LT20-3 EB20-3	LT20L-BS EB20L-BS	-	400	All models	94-14	MX15-4	LT14A-4 EB14A-4	LT14AH-BS EB14AH-BS	*LB14AA-A2
500	MXU500	-14	-	LT20-3 EB20-3	LT20L-BS EB20L-BS	-	353	Sportsman	98-01	MX15-4	LT14A-4 EB14A-4	LT14AH-BS EB14AH-BS	*LB14AA-A2
450	Maxxer450	-14	-	LT20-3 EB20-3	LT20L-BS EB20L-BS	-	330	Magnum Trail Boss	03-13	MX15-4	LT14A-4 EB14A-4	LT14AH-BS EB14AH-BS	-
300	Mongoose 300	-10	-	LT12-4 EB12-4	LT12L-BS EB12L-BS	-		Sportsman	-10	MX15-4	LT14A-4 EB14A-4	LT14AH-BS EB14AH-BS	-
	MXU300SD	All	-	LT12-4 EB12-4	LT12L-BS EB12L-BS	-		ACE	14-15	MX15-4	LT14A-4 EB14A-4	LT14AH-BS EB14AH-BS	-
250	Mongoose, MXU250	All	-	LT12-4 EB12-4	LT12L-BS EB12L-BS	-	325	All models	87-02	MX15-4	LT14A-4 EB14A-4	LT14AH-BS EB14AH-BS	*LB14AA-A2
150	MXU150	All	MX9-4	LT9-4 EB9-4	LT9-4BS EB9-4BS	-	300	Hawkeye, Sportsman 300	06-10	MX15-4	LT14A-4 EB14A-4	LT14AH-BS EB14AH-BS	*LB14-B2
90	Mongoose 90	All	-	LT5-3 EB5-3	LT5SL-BS EB5SL-BS	-	250	All models	85-05	MX15-4	LT14A-4 EB14A-4	LT14AH-BS EB14AH-BS	*LB14AA-A2
50	Mongoose 50	All	-	LT5-3 EB5-3	LT5SL-BS EB5SL-BS	-	200	Phoenix, Sawtooth	05-14	MX30-3	T30-3 EB30-3	LT12-BS EB12-BS	-
MANCO							90	Predator, Sportsman, Outlaw	03-14	-	LT5-3 EB5-3	LT5L-BS EB5L-BS	-
250	B26SL	06	MX15-4	LT14A-4 EB14A-4	LT14AH-BS EB14AH-BS	*LB14AA-A2		Scrambler, Sportsman	01-02	-	LT4-3 EB4-3	LT4L-BS EB4L-BS	-
	B26L	05-06	MX15-4	LT14A-4 EB14A-4	LT14AH-BS EB14AH-BS	*LB14AA-A2	50	Scrambler	03	-	LT5-3 EB5-3	LT5L-BS EB5L-BS	-
	B26OE, L	04-06	MX15-4	LT14A-4 EB14A-4	LT14AH-BS EB14AH-BS	*LB14AA-A2		Scrambler	01-02	-	LT4-3 EB4-3	LT4L-BS EB4L-BS	-
72	B089L	05-06	-	LT5-3 EB5-3	LT5L-BS EB5L-BS	-		Predator, Outlaw	04-14	-	LT5-3 EB5-3	LT5L-BS EB5L-BS	-



ALL TERRAIN VEHICLE BATTERY APPLICATIONS

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded	CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
DRR							YAMAHA						
	All Models		-	LT4-3 EB4-3	LTX4L-BS EBX4L-BS	-	700	YFM700FG Grizzly	07-15	-	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	-
CANNONDALE								YFM700R Raptor	06-15	-	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	-
	All Models	01-03	MX9-4	LT9-4 EB9-4	LTX9-BS EBX9-BS	-	660	YFM660FW Grizzly	02-08	-	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	-
BOMBARDIER(Can-Am)								YFM660R Raptor	01-05	MX14-4	LT14-4 EB14-4	LTX14-BS EBX14-BS	-
1000	Outlander 1000, Renegade	12-13	-	LT20-3 EB20-3	-	-	600	YFM600FW Grizzly	98-01	-	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	-
800	Outlander800 EFI, MAX, Renegade	06-13	-	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	-	550	YFM550FG Grizzly	-14	-	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	-
660	Outlander600 EFI	06	-	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	-	450	YFM450FG Grizzly	07-14	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	-
650	Outlander, MAX	-13	-	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	-		YFM450FW Kodiak, Automatic	03-10	-	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	-
DS650		00-06	-	LT15-3 EB15-3	LTX15L-BS EBX15L-BS	-		YFM450FX Wolverine	06-08	-	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	-
Quest		02-05	-	LT16C-3 EB16C-3	LTX16CL-BS EBX16CL-BS	-		YFZ450	04-13	-	LT7B-4 EB7B-4	-	-
Quest (Opt)		02-05	MX18-3	LT24-3 EB24-3	LTX18L-BS EBX18L-BS	-		YFZ450V	-09	-	LT7B-4 EB7B-4	-	-
500	Outlander, MAX, Renegade	-13	-	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	-	400	YFM400FG Grizzly	07-08	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	-
	Traxter, Quest	99-05	-	LT16C-3 EB16C-3	LTX16CL-BS EBX16CL-BS	-		YFM400FW Kodiak Automatic	03-06	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	-
	Traxter, Quest (Opt)	02-05	MX18-3	LT24-3 EB24-3	LTX18L-BS EBX18L-BS	-		YFM400FW Kodiak Automatic	06-02	-	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	-
450	DS450	-13	-	LT7B-4 EB7B-4	-	-		YFM400FW Kodiak Automatic	03-05	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	-
400	Outlander400XT, Max	04-13	-	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	-		YFM400FB BigBear	00-12	-	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	-
	Outlander400	03-04	-	LT15-3 EB15-3	LTX15L-BS EBX15L-BS	-		YFM400FWN BigBear 4WD	00-03	-	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	-
330	Outlander330	04-05	-	LT15-3 EB15-3	LTX15L-BS EBX15L-BS	-	350	Bruin	04-06	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	-
250	DS250	06-13	-	LT12-4 EB12-4	LTX12-BS EBX12-BS	-	350	YFM350ER Moto 4	87-95	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	-
200	Rally	03-05	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	-		YFM350FW BigBear 4WD	87-99	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	-
90	DS90, DS90F, Quest	02-13	-	LT4-3 EB4-3	LTX4L-BS EBX4L-BS	-		YFM350FX Wolverine	95-05	-	-	-	-
70	DS70	-13	-	LT4-3 EB4-3	LTX4L-BS EBX4L-BS	-		YFM350U BigBear 2WD	96-99	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	-
50	DS50, Quest	02-06	-	LT4-3 EB4-3	LTX4L-BS EBX4L-BS	-		YFM350X Wamtor	87-93	-	-	-	-
KTM								YFP350 TerraPro	88	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	-
525	SKATV	10-13	-	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	-		YFM350FX Wolverine	06-10	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	-
	XCATV	10-11	-	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	-		YFM350FG Grizzly	07-14	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	-
505	SKATV	08-13	-	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	-	250	YFM250R Raptor	04-13	-	EB210A-4	-	-
	XCATV	08-11	-	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	-		YFM250B BigBear	07-08	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	-
450	SKATV	08-11	-	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	-		YFM250B Bruin	05-06	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	-
	XCATV	08-09	-	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	-		YFM250R Raptor	08-13	-	EB27-3	-	-
PANDA MOTOR SPORTS								YFB250 Timber Wolf 2WD	92-98	-	-	-	-
125 KD		-	-	-	LB7-A	-		YFB250FW Timber Wolf 4WD	94-00	-	-	-	-
KD80		-	-	-	LB7-A	-		YFM250 Bear Tracker	99-04	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	-
Kd50		-	-	-	LB7-A	-	250	YFM250 Moto 4	89-91	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	-
		-	-	-	LB7-A	-	230	YFU4JT Pro-Hacker	89	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	-

* Must use adaptor kit, available from Buell.

"-": "Type": High performance flooded battery, for example, "LB16-B



ALL TERRAIN VEHICLE BATTERY APPLICATIONS

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded	CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
YAMAHA							YAMAHA						
225	YFM225 Moto 4	86-88	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	-	100	YFM100 Champ	87-91	-	-	-	12N7D-3B
	YTM225DR Tri-Moto	85-86	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	-	90	YFM90R Raptor	09-13	-	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	-
	YTM225DX Tri-Moto	83-85	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	-	80	YFM Grizzly	05-08	-	-	-	12N7D-3B
200	YFM200 Moto 4	85	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	-		YFM80 Badger	85-01	-	-	-	12N7D-3B
	YFM200XX Moto 4	85-89	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	-		YFM80R Raptor80	02-06	-	-	-	12N7D-3B
200	YTM200, E,ER Tri-Moto	83-85	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	-	50	YFM50 Raptor	04-09	-	-	-	12N7D-3B
125	YFA-1 Breeze	89-04	-	-	-	-	AEON(BENZAI)						
	YFM125S G	04-08	-	-	-	-	100	Cobra/CX-Sport 100	All	-	LT4-3EB4-3	LTX4L-BS EBX4L-BS	-
	YFM125R Raptor	11-13	-	EB27-3	-	-	90	Cobra/CX-Sport 90	All	-	LT4-3EB4-3	LTX4L-BS EBX4L-BS	-
							50	Cobra/CX-Sport 50	All	-	LT4-3EB4-3	LTX4L-BS EBX4L-BS	-



EUROPEAN AND OTHER MOTORCYCLE BATTERY APPLICATIONS

CC	Model	Year	Battery Type	CC	Model	Year	Battery Type
APRILIA				BENELLI			
1000	EST Caponord	02-03	LTX14-BS/EBX14-BS*	900	900 (6 Cilindri)		LB6-N24AL-B
	RST Futura	01-04	LTX12-BS/EBX12-BS*	650	650 Tornado U.T.		LB12A-A
	RSV 1000 Mile SP	99	LTX12-BS/EBX12-BS*	250	250 (4 Cilindri)		LB12A-A
	RSV 1000 Factory	04-09	LTX12-BS/EBX12-BS*		250-2C		6N11A-1B
	RSV 1000 Mile R	01-05	LTX12-BS/EBX12-BS*	125	125 Cross		6N11A-1B
	RSV 1000 Mile	01-09	LTX12-BS/EBX12-BS*		125 Custom Guzzi		12N5.5-4A
	RSV 1000 Mile	00	LTX12-BS/EBX12-BS*		125 Guzzi		12N5.5-4A
	Tuono	03-09	LTX12-BS/EBX12-BS*		125 Jarmo (clavv.)		LB9-B
	SL Falco	01-03	LTX14-BS/EBX14-BS*		125 Scooter Benelli		LB9L-B
850	MANA850	09	LTX14-BS/EBX14-BS*		125-2 CSE		6N11A-1B
750	Shiver	09	LTX14-BS/EBX14-BS*		125CS		LB9-B
650	Pegaso	00	LB12AL-A		125T Sport		6N11A-1B
600	Tuareg, Wind	87-88	LB14L-A2*	50	Devil 50 (clavv.)		LB4L-B
500	Scarabeo	04-05	LB14L-A2*		KBX 50 Race		LB4L-B
	Atlantic	03-05	LB14L-A2*		Scooty LX/DLX		LB4L-B
350	Tuareg, Wind	87-88	LB14L-A2*	BIG DOG			
250	RS250	00-04	LB4L-B*	1750	Bower	01-02	LTX20L-BS/EBX20L-BS
200	Atlantic	04-05	LB12AL-A		Bulldog	98-02	LTX20L-BS/EBX20L-BS
150	Scarabeo	00-04	LB12AL-A		Husky, Husky XT	99-02	LTX20L-BS/EBX20L-BS
	Mojito	04-05	LTX7L-BS/EBX7L-BS*		Mustiff	01-02	LTX20L-BS/EBX20L-BS
	Leonardo	00-03	LB12AL-A		Pitbull	98-02	LTX20L-BS/EBX20L-BS
125	Tuareg, Wind	88	LB9-B		Prosport/Prosport 1B	99-02	LTX20L-BS/EBX20L-BS
50	RS50	00-05	LB4L-B*		Vintage-Classic,Light, Sport	99-01	LTX20L-BS/EBX20L-BS
	SR50	00-01	LB4L-B*		Wolf	00-02	LTX20L-BS/EBX20L-BS
	SR50 Ditech	01-05	LTX5L-BS/EBX5L-BS*		Vintage-Classic,Light, Sport	99	LTX20L-BS/EBX20L-BS
	Scarabeo	00-03	LB4L-B*		Aeroglide/Aerosport	98-99	LTX20L-BS/EBX20L-BS
	Mojito	04-05	LB4L-B*		Bulldog	98	LTX20L-BS/EBX20L-BS
	Rally	04-05	LB4L-B*		Pitbull	98-99	LTX20L-BS/EBX20L-BS
ATK					Prosport/Prosport 1B*	98	LTX20L-BS/EBX20L-BS
	All Electric Start Models	91-95	LTX9-BS/EBX9-BS*		Vintage-Classic,Light, Sport	98	LTX20L-BS/EBX20L-BS
	All Electric Start Models	96-01	LTX7L-BS/EBX7L-BS*	1340	Aeroglide/Aerosport*	97	LTX20L-BS/EBX20L-BS

CC	Model	Year	Battery Type	CC	Model	Year	Battery Type
BIG DOG				BMW			
	Coyote	95-96	LTX20L-BS/EBX20L-BS •		R50/5	70-73	12C16A-3B
	Proglide	95-00	LTX20L-BS/EBX20L-BS •		R50S Twin Cylinders	55-59	B38-6A
	Vintage-Classic/Light, Sport	95-97	LTX20L-BS/EBX20L-BS •	250	R25, R27 Single Cylinder	55-59	6N11A-1B
BIMOTA					R25		B39-6
1100	SB6, SB7	95-97	LTX7L-BS/EBX7L-BS(x2)*	BSA			
	SB6R	97-99	LTX12-BS/EBX12-BS*		250350400,441, 500(12V)		LB7-A
1000	YBB/YB10	92-95	LB14L-A2*		600, 650, 750 (12V)		LB7-A
	YB11	95-99	LTX12-BS/EBX12-BS*		250, 350, 650 (6V)		B39-6
996	SB8R, SB8RS	98-00	LTX12-BS/EBX12-BS*		500 Gold Star		B38-6A
900	DB2	93-95	LB14-A2*		Rocket 750, Thunderbolt		LB9L-B
	DB2 Final Edition	97	LB14-A2*		Splitfire HK35, Starfire B25		LB9L-B
	DB3 Mantra	97-99	LTX7L-BS/EBX7L-BS(x2)*	CAGIVA			
	Testi	91-95	LB14-A2*	900	Elefant E900		LB16B-A1
BMW				750	Elefant	94-97	LB16-B*
1200	K1200R,S	05-09	LTX14-BS/EBX14-BS •		Elefant Bifaro	89	LB14L-A2*
	R1200GS,S,R	05-09	LTX14-BS/EBX14-BS •	500	T4 E Elefant	88*	LB14L-A2*
	K1200LT		12C16A-3A •	350	Elefant 2 Cyl.	86*	LB14L-A2*
	R1200LT,TGT	05-09	12C16A-3A •		T4 E Elefant, W12	87*	LB14L-A2*
	K1200LT,GT,RS,S	99-05	12C16A-3A •		T4R	87*	LB3L-A
	K1200RS	05-09	12C16A-3A •	125	Crouser	87-88	LB9-B
	K1200RS	97-05	12C16A-3A •		Freccia C9/C10R/C12R	87-90	LB9-B
	R1200C	98-05	12C16A-3A •		Lawson	90-97	LB9-B
	R1200RT	05-09	12C16A-3A •		Mito	90-97	LB9-B
1150	R1150GS, R	00-05	12C16A-3A •		N 90	97	LB9-B
1100	R1100LT/RS	90-95	12C16A-3A •		Roadster	94-97	LB9-B
	R1100GS	94-00	12C16A-3A •		Superduty	91-97	LB9-B
	R1100R	94-00	12C16A-3A •	50	City, Lucky, Explorer	94-97	LTX4L-BS/EBX4L-BS*
	R1100RS, RT	93-00	12C16A-3A •		K3, W4	-08	LB4L-B*
	R1100S	99-00	12C16A-3A •	CAN-AM			
1000	All 'K' Models	83-93	L60-N30L-A •	250	Spyder	08-09	LT24-3/EB24-3†
	R100/7	76-84	L60-N30L-A •	250	All Models	96-01	12N5-4B
	R100GS,FD,RS,RT	87-95	L60-N30L-A •	175	All Models	96-01	12N5-4B
	R100CS	76-84	L60-N30L-A •	125	All Models (Except Roadster & Superduty)	96-01	12N5-4B
900	R90W, R90S	69-76	L60-N30L-A •	CCM			
850	R850R	95-97	12C16A-3A •	600	All Electric Start Models	96-01	LTX9-BS/EBX9-BS*
800	F800ST, GS	09	LTX14-BS/EBX14-BS •	DAZON			
	R80, R80RT	84-95	L60-N30L-A •	150	Raider-Adventure	02-03	12N5-4B
	R80GS, R80ST	80-96	12C16A-3B		Raider-Classic	04	LTX9-BS/EBX9-BS •
	R80/7, R80RT	78-84	L60-N30L-A •		Raider-Max	04	LTX9-BS/EBX9-BS •
750	K75, RT	85-95	L60-N30L-A •	125	Scorpion	04	LTX9-BS/EBX9-BS •
	K75C, S	85-95	12C16A-3B	50	Diamondback	03-04	LTX4L-BS/EBX4L-BS •
	K75/5	70-73	12C16A-3B		Stinger	03-04	LB7-A
	K75/7	76-84	L60-N30L-A •	DERBI			
	K75/6	69-76	L60-N30L-A •		All Models		LB4L-B*
700	R69 - R69S	55-59	B38-6A	DUCATI			
650	F650GS	09	LTX14-BS/EBX14-BS •	1200	12, S, Multistrada	07	LT12B-4/EB12B-4
	F650	93-00	LB12AL-A	1100	Monster 110	09	LT12B-4/EB12B-4
	R65	84-95	L60-N30L-A •		1100, S, Multistrada, Hypemotard	07-09	LT12B-4/EB12B-4
	R65LS	78-84	12C16A-3B		Street Fighter, S	06	LT12B-4/EB12B-4
600	R60, R60/2 Twin Cylinders	55-59	B38-6A				
	R60S	70-73	12C16A-3B				
	R60R, R60/7	69-84	L60-N30L-A •				
500	R60/2 Twin Cylinders	55-59	B38-6A				

Please see battery supplier cross reference

Must use factory activated battery

* Part number EBZ10A-4 can be used as an optional upgrade, but spacer from MV must be used.

CC	Model	Year	Battery Type	CC	Model	Year	Battery Type
DUCATI				GILERA			
1098	1098	07-09	LT12B-4/EB12B-4	600	Nordwest	93	LB14L-A2 •
	All Other Models	01-09	LT12B-4/EB12B-4		RC 600C	93	LB14L-A2 •
1000	Desmosedici RR	08-09	LT12B-4/EB12B-4		Top Rally, XRT		LB14L-A2 •
	Biposto, GT, ST3	07	LT12B-4/EB12B-4	500	Dakota Kick-Start		12N5.5-3B
998	998,999	02-07	LT12B-4/EB12B-4		Dakota E-Start		LB10L-A2
996	Monoposto, Biposto, S	01-07	LT12B-4/EB12B-4	350	Dakota Kick-Start		12N5.5-3B
	996, S, SPS	99-00	LB16AL-A2		Dakota E-Start		LB10L-A2
944	ST2	01-07	LT12B-4/EB12B-4		ER Kick-Start		12N5.5-3B
	Support Touring 2(ST2)	97-00	LB16AL-A2		ER E-Start		LB10L-A2
916	Biposto, Senna, Strada	94-98	LB16AL-A2		XRT		LB14L-A2*
	I.E., SP, SPS	94-98	LB16AL-A2	250	Arizona Rally		LB10L-B
	Monster S4	01-02	LT12B-4/EB12B-4		RV NGR Kick-Start		12N5.5-3B
	ST4	01-07	LT12B-4/EB12B-4		RV NGR E-Start		LB10L-B
	ST4	99-00	LB16AL-A2		Arizona		12N5.5-3B
907	I.E. Paso	90-94	LB16-B*		Arizona		LB9-B
905	Paso	90-92	LB16-B*		Fast Bike		12N5.5-3B
900	Monster	01-07	LT12B-4/EB12B-4		Fast Bike		LB9-B
	Monster	94-00	LB16AL-A2		RTX, RV, RX Kick-Start		12N5.5-3B
	SS Kick-Start	-81	LB12A-A		RTX, RV, RX E-Start		LB9-B
	SS Replica	-81	LB12A-A		T4		12N5.5-3B
	SS Supersport, Replica	82-	LB14L-A2*		Motocarro		B38-6A
	SS	01-07	LT12B-4/EB12B-4	125	Apache Kick-Start		12N5.5-3B
	SL	92-96	LB16AL-A2		Apache E-Start		LB9-B
	Supersport FE	97-98	LB16AL-A2		Arizona Kick-Start		12N5.5-3B
888	SP, SP II, SP IV, SP V	90-95	LB16AL-A2		Arizona E-Start		LB9-B
860	GT, GTS		L60-N24AL-B*		Crona Kick-Start		12N5.5-3B
	Kick-Start		LB12A-A		Crona E-Start		LB9-B
851	Superbike	90-91	LB16AL-A2		CX Kick-Start		12N5.5-3B
	S Superbike	91-92	LB16AL-A2		CX E-Start		LB9-B
848	848	09	LT12B-4/EB12B-4		Fast Bike Kick-Start		12N5.5-3B
800	800SS	07	LT12B-4/EB12B-4		Fast Bike E-Start		LB9-B
750	F1, Montjuich, Paso	87-90	LB14L-A2		Freestyle Kick-Start		12N5.5-3B
	GT, Laguna Seca		L60-N24AL-B*		Freestyle E-Start		LB9-B
	Indiana		LB14L-A2*		GFR Kick-Start		12N5.5-3B
	Monster	01-07	LT12B-4/EB12B-4		GFR E-Start		LB9-B
	Sport	89-90	LB16AL-A2		KK, KZ Kick-Start		12N5.5-3B
750	SS Supersport Kick-Str.		LB12A-A		KK, KZ E-Start		LB9-B
	SS	01-07	LT12B-4/EB12B-4		MX1, MXR Kick-Start		12N5.5-3B
	SS	90-00	LB16AL-A2		MX1, MXR E-Start		LB9-B
748	Monoposto, Biposto, S	01-07	LT12B-4/EB12B-4		Nebraska Kick-Start		12N5.5-3B
	Strada Biposto, SP, SPS	97-00	LB16AL-A2		Nebraska E-Start		LB9-B
696	Monster	09	LT12B-4/EB12B-4		R1, R15 Kick-Start		12N5.5-3B
695	Multi strada	07	LT12B-4/EB12B-4		R1, R15 E-Start		LB9-B
650	Alazzurra, Indiana, Pantah		LB14L-A2*		RC Rally		LB10L-B
600	Monster		LT12B-4/EB12B-4		RTX, RV, RX Kick-Start		12N5.5-3B
	Pantah	01-07	LB14L-A2*		RTX, RV, RX E-Start		LB9-B
	TL		LB14L-A2*		SPO1, SPO2 Kick-Start		12N5.5-3B
500	GTL, GTV		L50-N18L-A3*		SPO1, SPO2 E-Start		LB9-B
	Pantah		LB14L-A2*		Top Rally Kick-Start		12N5.5-3B
	Sport		L50-N18L-A3 *		Top Rally E-Start		LB9-B
GAS GAS					Typhoon		LB7-A
370	Pampera	97	LTX4L-BS/EBX4L-BS •		XR1, XR2 Kick-Start		12N5.5-3B
320	Pampera	98-01	LTX4L-BS/EBX4L-BS •		XR1, XR2 E-Start		LB9-B
250	Pampera	96-01	LTX4L-BS/EBX4L-BS •				

CC	Model	Year	Battery Type	CC	Model	Year	Battery Type
GILERA (Continued)				KTM			
50	Bullit, Easy Moving, Runner	-97	LB4L-B*		LC4 E/XC	96-98	LTX9-BS/EBX9-BS*
	Eaglet	95-97	LB4L-B*	250	RXC LC4	96-01	LTX9-BS/EBX9-BS*
	GSA E-Starter		LB4L-B*		EXC Racing	05-09	LTX5L-BS/EBX5L-BS*
	Runner	-97	LB4L-B*		EXC Racing	03-05	EBZ5-3
	Sioux E-Starter		LB4L-B*		EXF	05-09	LTX5L-BS/EBX5L-BS*
	Stalker, Storm, Top Rally		LB4L-B*	MBK			
	Typoon	-97	LB4L-B*	250	Skyliner	01	LB7L-B
HUSABERG					Skyliner	99-00	EBZ7-3
	All Electric Start Models	01-02	LTX5L-BS/EBX5L-BS*	150	Vertex	99-00	LTX7A-BS/EBX7A-BS*
	All Electric Start Models	97-00	LTX9-BS/EBX9-BS*	125	Dodo	01	LB7L-B
HUSQVARNA					Flame, Flame R	01	LB7C-A
580	TE610E, SM610S	00-01	LTX14-BS/EBX14-BS*		Flame, Flame R	95-97	LTX7A-BS/EBX7A-BS*
460	TE450/TC450	09	EBZ7-3		Skyline/Skyliner	01	12N7-3B*
400	TE410E	00-01	LTX14BS/EBX14-BS*	100	Booster	01	LB4L-B*
HYOSUNG MOTORS					Booster	99-00	LTX5L-BS/EBX5L-BS*
650	GT650,R,S	09	LTX14-BS/EBX14-BS*		Nitro, Ovetto	01	LB4L-B*
	GV650,SE	09	LT14B-4/EB14B-4		Nitro, Ovetto	99-00	LTX5L-BS/EBX5L-BS*
250	GT250,R	09	LTX14-BS/EBX14-BS*	80	Evolet	95-98	LB4L-B*
	GV250	09	LTX9-BS/EBX9-BS	50	Booster	93-97	LB4L-B*
125	XR125	All	LTX7A-BS/EBX7A-BS*		Evolet	98	LB4L-B*
KASEA					Flapper, Nitro, Ovetto, Stunt	01	LB4L-B*
125	RX125	All	LTX7A-BS/EBX7A-BS*	MOTO GUZZI			
KTM				1200	Norge	09	LTX20CH-BS/EBX20CH-BS
1090	RC8	09	EBZ14A-4		Sport, ABS	09	LTX20CH-BS/EBX20CH-BS
990	Super Duke	03-09	EBZ14A-4		Breva, Griso	05-09	LTX20CH-BS/EBX20CH-BS
	Supernova	09	EBZ14A-4		Breva, Griso	05-06	LTX20CH-BS/EBX20CH-BS
950	Adventure	03-09	EBZ14A-4		1100 California(CA)	03-05	LTX15L-BS/EBX15L-BS*
	Supernova	09	EBZ14A-4		1100 California, Special, Jackal, Stone, EV	94-05	L60-N30L-A*
	Supernova	09	EBZ14A-4		Quota 1100 ES	99-02	LT15-3/EB15-3†
890	Duke	09	EBZ10A-4		Sport 1100i	97-99	LT15-3/EB15-3†
	Supernova	09	EBZ10A-4		V11 Bassa	99-00	L60-N30L-A*
	Supernova	09	EBZ10A-4		V11 EV	98-99	L60-N30L-A*
640	Adventurer, Duke, R/XC LC4	99-02	LTX9-BS/EBX9-BS*		VII Le Mans, Sport	99-05	LT15-3/EB15-3†
	Super Moto				California III	89-93	L60-N24AL-B*
	DUKE II, LC4, Adventure	03-08	EBZ10A-4		Convert		L60-N24AL-B*
625	SMC, SXC	03-09	EBZ10A-4		Daytona		L60-N24AL-B*
620	Adventure, Duke, LC4	96-98	LTX9-BS/EBX9-BS*		Le Mans		L60-N24AL-B*
530	EXC Racing	03-05	EBZ5-3		Mike		L60-N24AL-B*
	EXC Racing(Late05)	05-09	LTX5L-BS/EBX5L-BS*		1000NT		L60-N24AL-B*
	XC-W	09	LTX5L-BS/EBX5L-BS*		Quota		L60-N24AL-B*
525	EXC Racing	05	EBZ5-3		V10 Centauro Sport, BT	95-	LT15-3/EB15-3†
520	E/XC, M/XC Racing 4-Stroke	00-02	LTX4L-BS/EBX4L-BS*		Le Man		L60-N24AL-B*
	E/XC, M/XC Racing 4-Stroke (Opt)	00-02	LTX5L-BS/EBX5L-BS*		T3, T4, T5		L60-N24AL-B*
450	EXC Racing	03-05	EBZ5-3	850	Breva	04-09	LTX14AHL-BS/EBX14AHL-BS*
	EXC Racing	05-09	LTX5L-BS/EBX5L-BS*		Nevada		LB18L-A*
	SX-F, XC-FXC-W	09	LTX5L-BS/EBX5L-BS*		NTX		LB18L-A*
400	EXC Racing	05-09	LTX5L-BS/EBX5L-BS*		Strada		LB18L-A*
	EXC Racing	03-05	EBZ5-3		V7		L60-N24AL-B*
	XC-W	09	LTX5L-BS/EBX5L-BS*		V75		LB18L-A*
	EXC Racing 4-Stroke	00-02	LTX4L-BS/EBX4L-BS*	650	NTX		LB18L-A*
	EXC Racing 4-Stroke(Opt)	00-02	LTX5L-BS/EBX5L-BS*		V65		L60-N24AL-B*
					V65 Florida		LB18L-A*

*Please see battery supplier cross reference
†Must use factory activated battery
*Part number EBZ10A-4 can be used as an optional upgrade, but spacer from MV must be used.

CC	Model	Year	Battery Type	CC	Model	Year	Battery Type
MOTO GUZZI				PIAGGIO-VESPA			
500	Falcone		B38-6A		PX125*		LB9-B
	Falcone u.L.		LB18L-A*		PX125*80E		12N5.5-3B
	V50		L60-N24AL-B*		PX125*80E-AREC		12N5.5-3B
MuZ					PX125*80E-ARC		LB9-B
660	Baghira, Mastiff	98	LB9L-A1		PX125T5*		LB9-B
	Skorpion	95-01	LB9L-A1		PX150E *		LB9-B
125	All Models	All	LB9L-A1		PX150E-ARC		LB9-B
MV AGUSTA					PX200-ARC		LB9-B
1000	F4	05-09	EBZ10A-4		PX200E-ARC*		12N5.5-3B
910	Brutale	06-09	EBZ10A-4		PX200GS*		LB9-B
750	F4, Brutale	00-08	EB12A-BS*		Quartz, Sactico, Sfera 50, Sfera 80, Skipper 125/150		LB4L-B*
NORTON					Vespa 50 Elestart*		6N11A-1B(x2)
850	850 Commando, Commando (75)		LB14L-A2*		Vespa 125 Sprint		B39-6
750	750 Ranger Commando		LB9-B		Vespa 150 GL*		B39-6
350	350 Navigator		6N11A-1B		Vespa 150 FL/FL2(c/av.)		LB7-A
OZBIKE					Zip - Zip (Fast Rider)		LB4L-B*
	All Models	All	LTX5L-BS/EBX5L-BS*	PUCH			
PANDA MOTOR SPORTS					Cobra 80		B39-6
70	Trail Rider	99-02	LTX4L-BS/EBX4L-BS*		Cobra GTL, Daytona NS50, Monza		B39-6
50	Com-ute	96-02	6N4-2A		Lido SL50, Lido Vario		LB4L-B*
	Cub	96-99	LTX4L-BS/EBX4L-BS*		Monza GP, Monza GX, Monza X		B39-6
	Fun Rider	96-02	6N2-2A	ROYALENFIELD			
	Retro	01-02	LB7-A	500	All Kick-Start Models	95-99	LB7-A
36	Com-ute	98-01	6N4-2A		All Kick-Start Models	00-03	LB5L-B
PEUGEOT					All Electric Start Models	00-03	LB14L-A2*
150	Elyseo	98	LB12AL-A	350	All Kick-Start Models	95-99	LB7-A
125	Elyseo	98	LB12AL-A		All Kick-Start Models	00-03	LB5L-B
	SV, SV Geo	93-97	LB5L-B		All Electric Start Models	00-03	LB14L-A2*
100	Speedfighter, Trakker	98	LTX5L-BS/EBX5L-BS*	SYM			
	SV, SV Geo	97	LB5L-B	50	Red Devil	01	LTX4L-BS/EBX4L-BS*
80	SV, SV Geo	93-96	LB5L-B	TGB / VINKING			
50	Buxy, RS	95-97	LB4L-B*	150	All Models	00	LB4L-B*
	Elyseo	98	LB4L-B*	125	All Models	00	LB4L-B*
PIAGGIO-VESPA				90	All Models	00	LB4L-B*
	APE CAR, MP, MFR, P602		L60-N24AL-B*	50	All Models	00	LB4L-B*
	Ape 50 FL	93	LB9-B	TRIUMPH			
	Boxer, Bravo, Ciao		B39-6	2300	Rocket 3	03-09	LTX20L-BS/EBX20L-BS*
	Cosa 2		LB7-A	1200	Trophy	00-04	LTX14-BS/EBX14-BS*
	Cosa CLX 125(c/av.)		LB7-A		All Other Models		LB14L-A2*
	Cosa CLX 150(c/av.)		LB7-A	1050	Tiger	07-09	LT12B-4/EB12B-4
	Cosa CLX 200(c/av.)		LB7-A		Triple	05-07	EB12A-BS
	Free		LB4L-B*		Sprint	05-09	LTX12-BS/EBX12-BS*
	Hexagon 125/150		LB9-B		Speed Triple	05-09	LTX12-BS/EBX12-BS*
	NRQ 50		LB4L-B*	1000	Daytona	92-93	LB14L-A2*
	P125ETES, P125TS		LB7-A	955	Daytona 955, Speed Triple, Sprint ST	99-04	LTX14-BS/EBX14-BS*
	P200E (c/av.)		LB9-B		Sprint RS	00-04	LTX14-BS/EBX14-BS*
	PK50, PK50-C.A., PK50N, PK50XL		LB7-A		Tiger	02-06	LTX14-BS/EBX14-BS*
	PK80S-C.A.		LB7-A		All Other Models	95-97	LB14L-A2*
	PK125FL, PK125SS, PK125XL		LB7-A	900	Bonneville	05-07	LTX12-BS/EBX12-BS*

555 EUROPEAN AND OTHER MOTORCYCLE BATTERY APPLICATIONS

CC	Model	Year	Battery Type	CC	Model	Year	Battery Type
TRIUMPH				TRIUMPH			
	Scrambler	06-07	LTX12-BS/EBX12-BS •	650	T120 Bonneville		LB7L-B
	T90		6N11A-1B	600	600 (12V)		B39-6(x2)
	Tiger	99-01	LTX14-BS/EBX14-BS •		6T, T20B		6N11A-1B
	Thruxton	03-07	LTX12-BS/EBX12-BS •		Daytona 600	03-05	LTX9-BS/EBX9-BS •
	Thunderbird	02-03	LB14L-A2 •		T7600	00-03	LTX12-BS/EBX12-BS •
	All Other Models	91-01	LB14L-A2 •	500	500 (12V)		B39-6(x2)
865	America	09	LTX12-BS/EBX12-BS •		5TA, TR5A/R		6N11A-1B
	Bonneville T100, SE	09	LTX12-BS/EBX12-BS •	350	350 (6V)		6N11A-1B
	Scrambler	09	LTX12-BS/EBX12-BS •		350 (12V)		B39-6(x2)
	Speedmaster	09	LTX12-BS/EBX12-BS •		350 3TA, Twenty One		B38-6A
800	Bonneville	01-05	LTX12-BS/EBX12-BS •	250	Tigress (6V)		6N11A-1B
	Speedmaster	03-05	LTX12-BS/EBX12-BS •		Tigress (12V)		6N11A-1B(x2)
750	Bonneville, Tiger		LB9-B	200	Tiger		6N11A-1B
	T150 Trident		LB7L-B	183	Tigress		6N11A-1B
	All Other Models	93-97	LB14L-A2 •	173	Tigress		6N11A-1B
675	Daytona 675	06-09	LTB7-4/EB7B-4	150	Trident		LB7L-B
	Street triple	09	LTX9-BS/EBX9-BS •	120	Sonneville		LB7L-B

555 SNOWMOBILE BATTERY APPLICATION

CC	Model	Year	MX	Factory Active Maintenance Free	Dry Charged Maintenance Free	Flooded	CC	Model	Year	MX	Factory Active Maintenance Free	Dry Charged Maintenance Free	Flooded
ARCTIC CAT							ARCTIC CAT						
	4 Stroke Trail, Touring	02-03	-	LT24-3	LTX24H-BS	*L50-N18L-A2		Cougar	85-90	-	EB16B-3	EB16BL-BS	*L816L-B
				EB24-3	EBX24H-BS			Cougar	91-94	-	LT14A-3	LTX14AH-BS	*L814L-A2
	Bearcat 340, 440	95-00	-	LT14A-4	LTX14AH-BS	*L814L-A2					EB14A-3	EBX14AH-BS	
				EB14A-4	EBX14AH-BS			Cougar	95-98	-	LT20-4	LTX20-BS	*L818A
	Bearcat 570	04-07	-	LT24-3	LTX24H-BS	*L50-N18L-A2					EB20-4#	EBX20-BS#	
				EB24-3	EBX24H-BS			ET Tigre 5000	87-88	-	LT14A-3	LTX14AH-BS	*L814L-A2
	Bearcat 570	08-09	-	LT20-4	LTX20-BS	*L818A					EB14A-3	EBX14AH-BS	
				EB20-4#	EBX20-BS#			EXT	89-91	-	EB16B-3	EB16BL-BS	*L816L-B
	Bearcat 570	10-14	-	LT20H-4	-	-		EXT	92-94	MX15-3	LT14A-3	LTX14AH-BS	*L814L-A2
				EB20H-4	-	-					EB14A-3	EBX14AH-BS	
	Bearcat WT	95-02	-	LT20-4	LTX20-BS	*L818A		EXT Dk (EFI)	97-98	-	LT24-3	LTX24H-BS	*L50-N18L-A2
				EB20-4#	EBX20-BS#						EB24-3	EBX24H-BS	
	Bearcat WT	03-04	-	LT24-3	LTX24H-BS	*L50-N18L-A2		EXT (EFI)	95-97	-	-	-	*L87-A
				EB24-3	EBX24H-BS						-	12N7-4A	
	Bearcat WT	05-07	-	LT24-3	LTX24H-BS	-		EXT (EFI)	98	-	LT20-4	LTX20-BS	*L818A
				EB24-3	EBX24H-BS						EB20-4#	EBX20-BS#	
	Bearcat WT Turbo	06-07	-	LT24-3	LTX24H-BS	-		EXT 600	97-98	-	LT20-4	LTX20-BS	*L818A
				EB24-3	EBX24H-BS						EB20-4#	EBX20-BS#	
	Cheetah	86-90	-	EB16B-3	EB16BL-BS	*L816L-B		EXT (Carb)	95-96	-	LT20-4	LTX20-BS	*L818A
	Cheetah	91-93	-	LT14A-3	LTX14AH-BS	*L814L-A2					EB20-4#	EBX20-BS#	
				EB14A-3	EBX14AH-BS			EXT Special	91-92	MX15-3	LT14A-3	LTX14AH-BS	*L814L-A2
	Crossfire 500	07	-	LT20H-4	-	-					EB14A-3	EBX14AH-BS	
				EB20H-4	-	-					LT20-4	LTX20-BS	*L818A
	Crossfire 600	05-07	-	LT20H-4	-	-		F570, T570, Bearcat	08-14	-	EB20-4#	EBX20-BS#	
				EB20H-4	-	-					LT20-4	LTX20-BS	*L818A
	Crossfire 700	06	-	LT20H-4	-	-		F5 LXR	07-14	-	EB20-4#	EBX20-BS#	

*Please see battery supplier cross reference

555 SNOWMOBILE BATTERY APPLICATION

CC	Model	Year	MX	Factory Active Maintenance Free	Dry Charged Maintenance Free	Flooded	CC	Model	Year	MX	Factory Active Maintenance Free	Dry Charged Maintenance Free	Flooded
ARCTIC CAT							ARCTIC CAT						
	F6, F8, F1000	07-09	-	LT20-4EB20-4	-	-		Panther	94-96	MX15-4	LT14A-4	LTX14AH-BS	*L814A-2
				EB20-4	EBX20-BS#						EB14A-4	EBX14AH-BS	
	F8 LXR, F800, M800, X800	07-13	-	LT20-4EB20-4	-	-		Panther 340	97-00	MX15-4	LT14A-4	LTX14AH-BS	*L814A-2
				EB20-4	EBX20-BS#						EB14A-4	EBX14AH-BS	
	Finecat	03-06	-	LT24-3	LTX24H-BS	*L50-N18L-A2		Panther 370	01-04	MX15-4	LT14A-4	LTX14AH-BS	*L814A-2
				EB24-3	EBX24H-BS						EB14A-4	EBX14AH-BS	
	Jag AFS	89-91	MX15-3	LT14A-3	LTX14AH-BS	*L814L-A2		Panther 370	07	MX15-4	LT14A-4	LTX14AH-BS	*L814A-2
				EB14A-3	EBX14AH-BS						EB14A-4	EBX14AH-BS	
	Jag AFS/LT	89-93	MX15-3	LT14A-3	LTX14AH-BS	*L814L-A2		Panther 440	97-03	MX15-4	LT14A-4	LTX14AH-BS	*L814A-2
				EB14A-3	EBX14AH-BS						EB14A-4	EBX14AH-BS	
	Jag, Jag Dlx	85-93	MX15-3	LT14A-3	LTX14AH-BS	*L814L-A2		Panther 550	97-01	-	LT20-4	LTX20-BS	*L818A
				EB14A-3	EBX14AH-BS						EB20-4#	EBX20-BS#	
	Jag, Jag Dlx	94-99	MX15-4	LT14A-4	LTX14AH-BS	*L814A-2		Panther 570	02-07	MX18-3	LT24-3	LTX24H-BS	*L50-N18L-A2
				EB14A-4	EBX14AH-BS						EB24-3	EBX24H-BS	
	Jag Liquid	96	MX15-4	LT14A-4	LTX14AH-BS	*L814A-2		Panther 660	06-07	MX18-3	LT24-3	LTX24H-BS	*L50-N18L-A2
				EB14A-4	EBX14AH-BS						EB24-3	EBX24H-BS	
	Jag Z	93	MX15-3	LT14A-3	LTX14AH-BS	*L814L-A2		Powder Extreme	97-98	-	LT20-4	LTX20-BS	*L818A
				EB14A-3	EBX14AH-BS						EB20-4#	EBX20-BS#	
	Jag Z	94	MX15-4	LT14A-4	LTX14AH-BS	*L814A-2		Powder Special	95-97	-	LT20-4	LTX20-BS	*L818A
				EB14A-4	EBX14AH-BS						EB20-4#	EBX20-BS#	
	Jagular	07	-	LT20H-4	EB20H-4	-		Prowler	90-93	-	LT14A-3	LTX14AH-BS	*L814L-A2
				EB20H-4	-	-					EB14A-3	EBX14AH-BS	
	King Cat 900	04-06	MX18-3	LT24-3	LTX24H-BS	*L50-N18L-A2		Prowler	94	-	-	-	*L87-A
				EB24-3	EBX24H-BS						-	12N7-4A	*L818A
	Lynx	91-93	MX15-3	LT14A-3	LTX14AH-BS	*L814L-A2		Prowler 2-Up	95	-	LT20-4	LTX20-BS	*L818A
				EB14A-3	EBX14AH-BS						EB20-4#	EBX20-BS#	
	M5	06-07	-	LT20H-4	EB20H-4	-		Prowler Special	91-92	-	LT20-4	LTX20-BS	*L818A
				EB20H-4	-	-					EB20-4#	EBX20-BS#	
	M6	05-07	-	LT20H-4	EB20H-4	-		Puma	94-96	MX15-4	LT14A-4	LTX14AH-BS	*L814A-2
				EB20H-4	-	-					EB14A-4	EBX14AH-BS	
	M7	05-06	-	LT20H-4	EB20H-4	-		Sabercat 500	04-06	-	LT20-4	LTX20-BS	*L818A
				EB20H-4	-	-					EB20-4#	EBX20-BS#	
	Mountain Cat	01	-	LT20-4	LTX20-BS	*L818A		Sabercat 600, 700	04-06	-	LT24-3	LTX24H-BS	*L50-N18L-A2
				EB20-4#	EBX20-BS#						EB24-3	EBX24H-BS	
	Mountain Cat 500	02	-	LT20-4	LTX20-BS	*L818A		Super Jag	87-88	-	EB16B-3	EB16BL-BS	*L816L-B
				EB20-4#	EBX20-BS#			Super Jag	89-92	MX15-3	LT14A-3	LTX14AH-BS	*L814L-A2
	Mountain Cat 570	02-04	MX18-3	LT24-3	LTX24H-BS	*L50-N18L-A2					EB14A-3	EBX14AH-BS	
				EB24-3	EBX24H-BS			T660 Touring	04-06	MX18-3	LT24-3	LTX24H-BS	*L50-N18L-A2
	Mountain Cat 600	02-04	-	LT20-4	LTX20-BS	*L818A					EB24-3	EBX24H-BS	
				EB20-4#	EBX20-BS#			T660 Turbo	04-07	MX18-3	LT24-3	LTX24H-BS	-
	Mountain Cat 800	02-04	MX18-3	LT24-3	LTX24H-BS	*L50-N18L-A2					EB24-3	EBX24H-BS	
				EB24-3	EBX24H-BS			T660 Turbo Touring	04-07	MX18-3	LT24-3	LTX24H-BS	-
	Mountain Cat 900	03-04	MX18-3	LT24-3	LTX24H-BS	*L50-N18L-A2					EB24-3	EBX24H-BS	
				EB24-3	EBX24H-BS			T500, T570	09	-	LT20-4	LTX20-BS	*L818A
	Mountain Cat 1000	02	-	LT20-4	LTX20-BS	*L818A					EB20-4#	EBX20-BS#	
				EB20-4#	EBX20-BS#			Thundercat	97-02	-	LT20-4	LTX20-BS	*L818A
	Pantera	89-85	-	EB16B-3	EB16BL-BS	*L816L-B					EB20-4#	EBX20-BS#	
	Pantera	86-93	MX15-3	LT14A-3	LTX14AH-BS	*L814L-A2		Wildcat (EFI)	93	-	EB16B-3	EB16BL-BS	*L816L-B
				EB14A-3	EBX14AH-BS			Wildcat (EFI)	95-96	-	-	-	*L87-A
	Pantera	94	-	LT20-4	LTX20-BS	*L818A					-	12N7-4A	*L87-A
				EB20-4#	EBX20-BS#			Wildcat MC	94	-	-	-	12N7-4A
	Pantera	95-98	MX18-3	LT24-3	LTX24H-BS	*L50-N18L-A2					-	12N7-4A	*L87-A
				EB24-3	EBX24H-BS			Wildcat Touring	95-96	-	-	-	12N7-4A
	Pantera	99-01	-	LT20-4	LTX20-BS	*L818A					-	-	-
				EB20-4#	EBX20-BS#			X7000, X9000, X9000, M9000	14	-	LT20H-4	-	-
	Pantera 550, 600	02-05	-	LT20-4	LTX20-BS	*L818A					EB20H-4	-	-
				EB20-4#	EBX20-BS#			Z	98-01	MX15-4	LT14A-4	LTX14AH-BS	*L814A-2
	Pantera 800	02-04	-	LT24-3	LTX24H-BS	*L50-N18L-A2					EB14A-4	EBX14AH-BS	
				EB24-3	EBX24H-BS			21, TX1, F1100, M1100, Bearcat Z1	01-14	-	LT20H-4	-	-
	Panther	80-88	-	EB16B-3	EB16BL-BS	*L816L-B					EB20H-4	-	-
	Panther	89-93	MX15-3	LT14A-3	LTX14AH-BS	*L814L-A2					LT14A-4	LTX14AH-BS	*L814A-2



SNOWMOBILE BATTERY APPLICATION

CC	Model	Year	MX	Factory Active Maintenance Free	Dry Charged Maintenance Free	Flooded	CC	Model	Year	MX	Factory Active Maintenance Free	Dry Charged Maintenance Free	Flooded
ARCTIC CAT							POLARIS						
2570		02-07	MX18-3	LT24-3 EB24-3	LT24HL-BS EB24HL-BS	*L50-N18L-A2	800	Rush, RMK, Pro, Assault, SWBK	12	-	LT20-3 EB20-3	LT20HL-BS EB20HL-BS	-
ZL		01	-	LT20-4 EB20-4#	LT20HL-BS EB20HL-BS#	*L818-A		Rush, Switchback, RMK	11-13	-	LT20-3 EB20-3	LT20HL-BS EB20HL-BS	-
ZL 500		02	-	LT20-4 EB20-4#	LT20HL-BS EB20HL-BS#	*L818-A		Switchback, RMK	-10	-	LT20-3 EB20-3	LT20HL-BS EB20HL-BS	-
ZL 550, 600		02-03	-	LT20-4 EB20-4#	LT20HL-BS EB20HL-BS#	*L818-A	750	FS Wide Track	10-11	MX30-3	LT20-3 EB20-3	LT20HL-BS EB20HL-BS	-
ZL 800		02-03	MX18-3	LT24-3 EB24-3	LT24HL-BS EB24HL-BS	*L50-N18L-A2		Turbo LXJQ	08-14	-	LT20-3 EB20-3	LT20HL-BS EB20HL-BS	-
ZR (EFI)		95-96	-	-	-	-		Wide Track	89-09	MX18-3	LT24-3 EB24-3	LT24HL-BS EB24HL-BS	*L50-N18L-A3
ZR 500, 600		01-02	-	LT20-4 EB20-4#	LT20HL-BS EB20HL-BS#	*L818-A		FS/ST	06-09	-	LT20-3 EB20-3	LT20HL-BS EB20HL-BS	-
ZR 800		02-03	MX18-3	LT24-3 EB24-3	LT24HL-BS EB24HL-BS	*L50-N18L-A2	600	IQ	14	-	LT20-3 EB20-3	LT20HL-BS EB20HL-BS	-
ZR 900		03-06	MX18-3	LT24-3 EB24-3	LT24HL-BS EB24HL-BS	*L50-N18L-A2		Wide Track Rush, IQ, Shift, Switchback	09-13	-	LT20-3 EB20-3	LT20HL-BS EB20HL-BS	-
Z5000, Z6000, Z7000, Z8000, Z9000		14	-	LT20H-4 EB20H-4	-	-		Turbo Switchback, Turbo Dragon	06-09	-	LT20-3 EB20-3	LT20HL-BS EB20HL-BS	-
ZRT		97-02	-	LT20-4 EB20-4#	LT20HL-BS EB20HL-BS#	*L818-A		Turbo LXJQ	08-13	-	LT20-3 EB20-3	LT20HL-BS EB20HL-BS	-
BOMBARDIER/SKI-DOO (BRP)							YAMAHA						
1200	Grand Touring/Expedition, Renegade, GSX, GTX, MXZ	10-13	MX20-3	-	-	-		Indy, Indy Trail	84-01	MX18-3	LT24-3 EB24-3	LT24HL-BS EB24HL-BS	*L50-N18L-A3
1000	Expedition	03-06	MX18-3	LT24-3 EB24-3	LT24HL-BS EB24HL-BS	-		AI/EFI (FXL 500 EFI) FS/ST	93-07	-	LT20-3 EB20-3	LT20HL-BS EB20HL-BS	-
	Legend	03-06	MX18-3	LT24-3 EB24-3	LT24HL-BS EB24HL-BS	-		Sprint (Electric Start)	86-88	-	-	-	*L89A-A
	Scandic	03-06	MX18-3	LT24-3 EB24-3	LT24HL-BS EB24HL-BS	-		Wide Track FS	10-13	MX30-3	LT20-3 EB20-3	LT20HL-BS EB20HL-BS	*L50-N24-A
800	Expedition, Legend Skandic, Renegade, Summit Free Ride	07-13	-	LT20-3EB20-3	LT20HL-BS	-		Wide Track	89-05	MX18-3	LT24-3 EB24-3	LT24HL-BS EB24HL-BS	*L50-N18L-A3
	GSX, MXZ	04-13	-	LT20-3EB20-3	LT20HL-BS	-		All Other Models	02-06	MX15-4	LT14A-4 EB14A-4	LT14AHL-BS EB14AHL-BS	*L814A-A2
600	Expedition, Skandic, Summit	06-13	-	LT20-3EB20-3	LT20HL-BS	-		All Electric Start Kits	85-89	MX18-3	LT24-3 EB24-3	LT24HL-BS EB24HL-BS	*L50-N18L-A3
	Grand Touring/Renegade, Tundra, GSX, GTX	04-13	-	LT20-3EB20-3	LT20HL-BS	-		All Electric Start Kits	94-05	MX15-4	LT14A-4 EB14A-4	LT14AHL-BS EB14AHL-BS	*L814A-A2
550	Expedition, Freestyle, Skandic	05-13	-	LT20-3EB20-3	LT20HL-BS	-		IQ, LX, Shift	-13	-	LT20-3 EB20-3	LT20HL-BS EB20HL-BS	-
	Grand Touring, Renegade, Tundra, GSX, GTX, MXZ	07-13	-	LT20-3EB20-3	LT20HL-BS	-		Trail, Trail Touring	-10	MX15-4	LT14A-4 EB14A-4	LT14AHL-BS EB14AHL-BS	*L814A-A2
300	Skandic	-10	-	LT20-3EB20-3	LT20HL-BS	-		Wide Track	89-14	MX18-3	LT24-3 EB24-3	LT24HL-BS EB24HL-BS	*L50-N18L-A3
	All models	-08	MX18-3	LT24-3 EB24-3	LT24HL-BS EB24HL-BS	*L50-N18L-A3	YAMAHA						
	All 4-stroke	03	MX18-3	LT24-3 EB24-3	LT24HL-BS EB24HL-BS	-	1049	FX Nitro	-14	-	LT20-3 EB20-3	LT20HL-BS EB20HL-BS	-
	CKG Types	99-03	MX18-3	LT24-3 EB24-3	LT24HL-BS EB24HL-BS	*L50-N18L-A3		RS Venture	-14	-	LT20-3 EB20-3	LT20HL-BS EB20HL-BS	-
	Elite	04-06	MX30-3	LT20-3EB20-3	LT20HL-BS	-		RS Vector	-14	-	LT20-3 EB20-3	LT20HL-BS EB20HL-BS	-
	Zx Types	99-01	-	LT20-3 EB20-3	LT20HL-BS EB20HL-BS	-		RS Viking Pro/Class	09-13	-	LT20-3 EB20-3	LT20HL-BS EB20HL-BS	-
	Zx Types	02-03	-	LT20-3 EB20-3	LT20HL-BS EB20HL-BS	-	1000	RS 1000S, GT, RS	-	-	LT20-3 EB20-3	LT20HL-BS EB20HL-BS	-
KAWASAKI								Apex	06-14	MX14-4	LT14A-4 EB14C-4	LT14AHL-BS EB14C-4	-
	All Models	All	MX18-3	LT24-3 EB24-3	LT24HL-BS EB24HL-BS	*L50-N18L-A3		Rx 1000R RX (All Models)	03-05	-	LT20-3 EB20-3	LT20HL-BS EB20HL-BS	-
KASEA							998	Apex	06-09	MX14-4	LT14A-4 EB14C-4	LT14AHL-BS EB14C-4	-
50	Sense, Prima	-	-	LT5-3 EB5-3	LT5HL-BS EB5HL-BS	-	973	Vector	09-14	-	LT20-3 EB20-3	LT20HL-BS EB20HL-BS	-
								Viking	09	-	LT20-3 EB20-3	LT20HL-BS EB20HL-BS	-



SNOWMOBILE BATTERY APPLICATION

CC	Model	Year	MX	Factory Active Maintenance Free	Dry Charged Maintenance Free	Flooded	CC	Model	Year	MX	Factory Active Maintenance Free	Dry Charged Maintenance Free	Flooded
YAMAHA							YAMAHA						
700	SXV700ER SXViper ER	02-05	MX18-3	LT24-3 EB24-3	LT24HL-BS EB24HL-BS	*L50-N18L-A3	499	Phazer	09	MX14-4	LT14-4 EB14C-4	LT14HL-BS EB14C-4	-
	VT700 Venture 700	98-04	MX18-3	LT24-3 EB24-3	LT24HL-BS EB24HL-BS	*L50-N18L-A3		Venture Lite	09	MX14-4	LT14-4 EB14C-4	LT14HL-BS EB14C-4	-
	VX700XTCD Vmax 700 XTC Deluxe	98	MX18-3	LT24-3 EB24-3	LT24HL-BS EB24HL-BS	*L50-N18L-A3	490	P2480E Phazer Deluxe	84-89	MX15-3	LT14A-3 EB14A-3	LT14AHL-BS EB14AHL-BS	*L814L-A2
	VX700XTC Vmax 700 Deluxe	99-00	MX18-3	LT24-3 EB24-3	LT24HL-BS EB24HL-BS	*L50-N18L-A3		P2480E Phazer II LE, SS	90-98	MX15-3	LT14A-3 EB14A-3	LT14AHL-BS EB14AHL-BS	*L814L-A2
	VX700ER Vmax 700 ER	01-02	MX18-3	LT24-3 EB24-3	LT24HL-BS EB24HL-BS	*L50-N18L-A3		VT480 Venture GT	92-93	MX15-3	LT14A-3 EB14A-3	LT14AHL-BS EB14AHL-BS	*L814L-A2
600	VT600 Venture 600	97-98	-	-	-	*L816AL-A2		VT480 Venture XL	91-97	MX15-3	LT14A-3 EB14A-3	LT14AHL-BS EB14AHL-BS	*L814L-A2
	VT600 Venture 600	99-00	MX18-3	LT24-3 EB24-3	LT24HL-BS EB24HL-BS	*L50-N18L-A3		VT480TR Venture TR Electric	98	MX15-3	LT14A-3 EB14A-3	LT14AHL-BS EB14AHL-BS	*L814L-A2
	VX600EXC Vmax 600 LE/ DX	94-96	-	-	-	*L816AL-A2	340	CS340 Ovation Deluxe/ LE	89-98	-	-	-	*L814L-A2
	VX600ER Vmax 600 ER	02-03	MX18-3	LT24-3 EB24-3	LT24HL-BS EB24HL-BS	*L50-N18L-A3		EC340 Excel III	81-88	MX15-3	LT14A-3 EB14A-3	LT14AHL-BS EB14AHL-BS	*L814L-A2
	VX600XTC Vmax 600 XTC	97-98	-	-	-	*L816AL-A2		ET340E Enduro	79	MX18-3	EB24-3	EB24HL-BS	*L814L-A2
	VX600 DX Xmax	99-01	MX18-3	LT24-3 EB24-3	LT24HL-BS EB24HL-BS	*L50-N18L-A3		ET340E Enduro	80	MX15-3	LT14A-3 EB14A-3	LT14AHL-BS EB14AHL-BS	*L814L-A2
570	EX570E Exciter	88-90	-	-	-	*L816AL-A2		CF300 Invader	86-90	-	-	-	*L816AL-A2
	EX570E Exciter II LE	91-93	-	-	-	*L816AL-A2							
540	EC540 Excel	79-80	MX18-3	LT24-3 EB24-3	LT24HL-BS EB24HL-BS	*L50-N18L-A3	300	CF300 Invader	86-90	-	-	-	*L816AL-A2
	VX540E, II, III	89-93	-	-	-	*L816AL-A2	125	SV125E Sno-Sport	90-91	MX15-3	LT14A-3 EB14A-3	LT14AHL-BS EB14AHL-BS	*L814L-A2
	XL540 XLV	85-90	-	-	-	*L816AL-A2		SV800E Sno-Scoot	88-90	-	-	-	*L814L-A2
500	Phazer	-14	MX14-4	LT14-4 EB14C-4	LT14HL-BS EB14C-4	-	80	SV800E Sno-Scoot	88-90	-	-	-	*L814L-A2
	Venture Lite	-14	MX14-4	LT14-4 EB14C-4	LT14HL-BS EB14C-4	-		Electric Start Kit 80S Triple	All	MX18-3	LT24-3 EB24-3	LT24HL-BS EB24HL-BS	*L50-N18L-A3
	PZ500DX Phazer 500 Deluxe	01	-	-	-	*L816AL-A2		Electric Start Kit 80R Twin Vmax	All	MX15-3	LT14A-3 EB14A-3	LT14AHL-BS EB14AHL-BS	*L814L-A2
	VX500 Venture 500	97-01	-	-	-	*L816AL-A2		Electric Start Kit 80J	All	MX15-3	LT14A-3 EB14A-3	LT14AHL-BS EB14AHL-BS	*L814L-A2
	VT500 Venture 500 XL	99-00	-	-	-	*L816AL-A2		P500	All	MX15-3	LT14A-3 EB14A-3	LT14AHL-BS EB14AHL-BS	*L814L-A2
	VX500E Vmax	94-01	-	-	-	*L816AL-A2		Electric Start Kit 80BH	All	MX15-3	LT14A-3 EB14A-3	LT14AHL-BS EB14AHL-BS	*L814L-A2
								P2480 ST, ET, 1410TR					



SCOOTER BATTERY APPLICATIONS

CC	Model	Year	MX	Factory Active Maintenance Free	Dry Charged Maintenance Free	Flooded	CC	Model	Year	MX	Factory Active Maintenance Free	Dry Charged Maintenance Free	Flooded
KYMCO							KYMCO						
500	Xolting 500i	05-14	-	LT14-4 EB14C-4	LT14HL-BS EB14C-4	-	120	Agility 125	-14	-	LT5-3 EB5-3	LT5HL-BS EB5HL-BS	-
400	Xolting 400i	09	MX12-4	LT12-4 EB12-4	LT12HL-BS EB12HL-BS	-		People S 125	09-10	-	LT7A-4 EB7A-4	LT7AHL-BS EB7AHL-BS	-
300	Downtown 300	-13	-	-	-	-	90	Super 8	09-14	-	LT7A-4 EB7A-4	LT7AHL-BS EB7AHL-BS	-
	People GT	-14	-	-	-	-		Super 9	09-10	-	LT5-3 EB5-3	LT5HL-BS EB5HL-BS	-
250	People 250	09	MX12-4	LT12-4 EB12-4	LT12HL-BS EB12HL-BS	-			09-13	-	LT5-3 EB5-3	LT5HL-BS EB5HL-BS	-
	Xolting 250i	10-11	MX12-4	LT12-4 EB12-4	LT12HL-BS EB12HL-BS	-		People S 50	09-10	-	LT7A-4 EB7A-4	LT7AHL-BS EB7AHL-BS	-
200	People S 200	-11	-	LT7A-4 EB7A-4	LT7AHL-BS EB7AHL-BS	-		Agility 50	09-14	-	LT7A-4 EB7A-4	LT7AHL-BS EB7AHL-BS	-
	People GT	-13	-	-	-	-							
150	People S 150	09-13	-	LT7A-4 EB7A-4	LT7AHL-BS EB7AHL-BS	-							
	Super 8 150	09-14	-	LT7A-4 EB7A-4	LT7AHL-BS EB7AHL-BS	-							

The LT20-3EB20-3 series batteries may be used as an optional upgrade, but some modification to the hold down may be necessary. See battery label for retrofit cautions.



SCOOTER BATTERY APPLICATIONS

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded	CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
MANCO							HONDA						
50	504IE	02-06	-	LT5-3 EB5-3	LTX5L-BS	-	50	NN50MD Gyro	84 03-15	-	- EB27-3	-	LB4L-B
	5051L	06	-	LT5-3 EB6-3	LTX5L-BS	-		NP50L S, Ruckus	86-87	-	LT4-3 EB4-3	LTX4L-BS EBX4L-BS	-
DDR								NC50 Spruce	84-85	-	-	-	LB4L-B
	All Models	-	-	LT4-3 EB4-3	LTX4L-BS	-		P50 Little Honda	67-68	-	-	-	6N4-2A-4
					EBX4L-BS	-		PASOM Moped, PASOM	78-83	-	-	-	6N4B-2A-5
						-		SA50 Elite LX, S, SR	88-01	-	LT4-3 EB4-3	LTX4L-BS EBX4L-BS	-
HONDA								SE50 (All)	88-90	-	LT4-3 EB4-3	LTX4L-BS EBX4L-BS	-
600	F50C600 Silver Wing	02-15	-	EB212A-4 EB212-4	-	-		SE50 Elite (All)	87	-	LT4-3 EB4-3	LTX4L-BS EBX4L-BS	-
300	NBS300 Forza	14-15	-	EB212A-4 EB212-4	-	-		TO50 Gyro S (All)	85-86	-	LT4-3 EB4-3	LTX4L-BS EBX4L-BS	-
250	SM250	09-13	-	EB212A-4 EB212-4	-	-	YAMAHA						
	CH250 Elite	85-90	MX12-4	LT12-4 EB12-4	LTX12-BS	-	530	T-Max	12-13	-	EB212A-4 EB212-4	-	-
	CH250 Hawk	93-99	MX12-4	LT12-4 EB12-4	LTX12-BS	-	500	XP500T-Max	09-13	-	EB210A-4	-	-
	CH250 Hawk	86-87	MX12-4	LT12-4 EB12-4	LTX12-BS	-	400	YP400 Majesty Maxium	04-14 -13	-	LT08-4EB08-4 EB210A-4	-	-
	NBS250 Reflex	01-09	-	EB212A-4 EB212-4	-	-	250	Morphous	06-07	-	EB210A-4	-	-
	PS250 Big Ruckus	05-08	-	EB212A-4 EB212-4	-	-	200	XC200 Riva	87-91	-	-	-	LB10L-B2
	PCX	11-13	-	EB27-3	-	-	180	XC180 Riva	83-85	-	-	-	LB10L-B
150	NHX110 Elite	10-11	-	LT7-3 EB7-3	LTX7L-BS	-	125	YJ125T Vino 125	04-09	-	LT7A-4 EB7A-4	LTX7A-BS EBX7A-BS	-
	PCX150	13	-	EB27-3	-	-		XC125 Riva	85-01	-	-	-	LB7C-A
	PCX150	15	-	LT7-3 EB7-3	-	-		Zuma 125	09-15	-	LT7A-4 EB7A-4	LTX7A-BS EBX7A-BS	-
	CH150 Elite	87	MX3-4	LT9-4 EB9-4	LTX9BS	-	80	CV80 Riva	83-87	-	-	-	6N11-2D
	CH150 Elite Deluxe	85-86	-	-	EBX9-BS	-	50	JOG, JR	-13	-	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	-
	FES150	-	-	-	LT9-BS	-		CASO Riva	83-86	-	-	-	6L89L-B
	SH150	10-12	-	LT7-3 EB7-3	LTX7L-BS	-		CE50 Riva Jog	86-87	-	-	-	LB4L-B
	SH150	13	-	EB27-3	EBX7L-BS	-		CG50 Riva	88-91	-	-	-	LB4L-B
125	CH125 Elite	84	-	-	-	LB9-B		CV50 Riva	84	-	-	-	6L89L-B
	FES125	-	-	-	LT9-BS	-		OW50 Zuma	89-90	-	-	-	LB4L-B
	NH125 Aero	84	-	-	EBX9-BS	-		OW50 Zuma II	97-01	-	-	-	LB4L-B
	Pantheon 125	-	-	-	LT9-BS	-		CV50 Riva Jog	92-01	-	LT4-3 EB4-3	LTX4L-BS EBX4L-BS	-
	PCX125	11	-	EB27-3	-	-		SH50 Riva Razz	87-01	-	-	-	LB4L-B
	SH125	10-12	-	LT7-3 EB7-3	LTX7L-BS	-		XC50 Vino Classic	06-09	-	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	-
	SH125	13	-	EB27-3	-	-		XF50W (C3)	07-13	-	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	-
110	NHX110 Elite	10-13	-	LT7-3 EB7-3	LTX7L-BS	-		Vino & Vino Classic	02-14	-	-	LT4B-BS	-
80	CH80 Elite	93-99	-	LT5-3 EB5-3	LTX5L-BS	-		YWS0A, F, FX Zuma	02-14	-	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	-
	NH80 Aero	85	-	LT5-3 EB5-3	LTX5L-BS	-		VOX	-13	-	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	-
	NH90MD Aero	83-84	-	-	-	LB5L-B	PIAGGIO-GILERA						
50	CH-F50 Metropolitan II, SF	02-09	-	EB27-3	-	-	500	Fuoco 500ie	10-13	-	-	LTX16-BS	-
	NBS50 Aero	85-87	-	LT4-3 EB4-3	LTX4L-BS	-	50	Sp50	10-13	-	-	EBX16-BS*	LB4L-B
	NBS0M Aero	83-84	-	-	-	LB4L-B	BMW						
	NCH50 Metropolitan	13-15	-	LT4-3 EB4-3	LTX4L-BS	-	650	C650 GT	11-14	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	-
					EBX4L-BS	-	600	C600	13-14	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	-
						-		C690	11-12	-	EB214A-4	-	-

* Must use adaptor kit available from Buell.


** * "Type": High performance flooded battery, for example, "LB16-B".



SCOOTER BATTERY APPLICATIONS

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded	CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
PIAGGIO							SYM						
500	Mps 500	08-13	MX14-4	LT14-4	LTX14-BS EB14C-4	-	250	RV250	10-11	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	-
	BV500	08-13	MX14-4	LT14-4	LTX14-BS EB14C-4	-	200	HD200	10-13	MX9-4	LT9-4	LTX9-BS EBX9-BS	-
	Fuoco 500ie	10-11	-	-	LTX16-BS EBX16-BS*	-	125	HD125	10-11	MX9-4	LT9-4	LTX9-BS EBX9-BS	-
	Nexus 500ie	10	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2		Fiddell 125	10-11	-	LT7A-4 EB7A-4	LTX7A-BS EBX7A-BS	-
400	X9	09	MX14-4	LT14-4	LTX14-BS EB14C-4	-	50	DO	09	-	LT4-3 EB4-3	LTX4L-BS EBX4L-BS	-
400	MP3 400	08-13	MX14-4	LT14-4	LTX14-BS EB14C-4	-		Fiddell 50	10-11	-	LT7A-4 EB7A-4	LTX7A-BS EBX7A-BS	-
300	GTS300	10-11	MX14-4	LT14-4	LTX14-BS EB14C-4	-		JetEuro 50	-	-	EB27-3	-	-
	Nexus 300ie	10-11	MX14-4	LT14-4	LTX14-BS EB14C-4	-		MO50	10-13	-	LT7A-4 EB7A-4	LTX7A-BS EBX7A-BS	-
250	GTS250	10-11	MX14-4	LT14-4	LTX14-BS EB14C-4	-		MO50	09	-	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	-
	GTV250	10-11	MX14-4	LT14-4	LTX14-BS EB14C-4	-		RS50	10	-	LT4-3 EB4-3	LTX4L-BS EBX4L-BS	-
	MP3 250	08-09	MX14-4	LT14-4	LTX14-BS EB14C-4	-		SYMpy50	10-11	-	LT7A-4 EB7A-4	LTX7A-BS EBX7A-BS	-
	BV250	08-09	MX14-4	LT14-4	LTX14-BS EB14C-4	-	E-TON						
200	Runner 200	10-11	MX12-4	LT12-4	LTX12-BS EB12-4	-	150	Beamer R4-150	-11	-	LT9-4 EB9-4	LTX9-BS EBX9-BS	-
150	FLY 150	09-13	-	-	-	*LB9-B		Matix R4-150	-11	-	LT9-4 EB9-4	LTX9-BS EBX9-BS	-
	LX50	10-11	-	-	-	*LB9-B	50	Sport150	-11	-	LT7A-4 EB7A-4	LTX7A-BS EBX7A-BS	-
125	Runner 125	10-11	MX14-4	LT14-4	LTX14-BS EB14C-4	-		Beamer50,III	00-11	-	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	-
50	FLY 50	09-13	-	-	-	*LB9-B		Matix 50	-11	-	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	-
	LX50	10-11	-	-	-	*LB9-B		Sport 50	-11	-	LT7A-4 EB7A-4	LTX7A-BS EBX7A-BS	-
	SP50	10	-	-	-	*LB4L-B	APRILLA						
	Typhoon	09	-	-	-	*LB9-B	850	SRV850	12-13	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	-
SUZUKI							500	Scramble	09-13	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	-
650	AN650 Burgman	03-14	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS EB12A-BS	-	250	Sport City	09-13	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	-
400	AN400 Burgman	03-14	-	-	-	-	200	Scramble	09-13	-	-	-	*LB12ALA
50	F50, F50R	71	-	-	-	6N4-2A	150	Motile	09-13	-	-	LT7-3 EB7-3	LTX7L-BS EBX7L-BS
	FA50 Shuttle	80-81	-	-	-	6N2-2A-4	125	Sport City	08-13	-	-	-	*LB9-B
	F850	80-81	-	-	-	6N4-2A	100	Scramble ST	09-13	-	-	-	*LB9-B
	Fz50	79-83	-	-	-	6N4-2A	50	Sport City	09-13	-	-	-	*LB9-B
PIAGGIO-VESPA								SV50	09-13	-	-	-	*LB9-B
300	GTS300,GTV300	10-13	MX14-4	LT14-4	LTX14-BS EB14C-4	-							
150	LX150 4T	-13	MX12-4	LT12-4	LTX12-BS EB12-4	-							
50	Lx50	10-13	-	-	-	*LB9-B							





Model	Battery Type
ALLIS-CHALMERS	
405,506	12N9-4B-1+
608,TD, 611,LTQ, 611 Special,	
611H, 613, 616 Special, 616H,	
830 Sprint, T811, T815,	
1036 Sprint	
	U1-9
ARIENS / GRAVELY	
1330,1332,8028,8530	LB14A-A2+
901000 & 912000 Series	12N12A-4A-1+
925000 & 927000 Series	12N12A-4A-1+
929001, 929002, GT17,	U1-9
931001, 931006,	
LTQ20, 931010, 931018, HT16,	
YT10, YT11	
ATLAS TOOL & MFG. CO.	
ER2600, ER650, ER2680,	12N9-3A-1+
ER3280	
BOLENS	
Husky 728, Husky 770,	LB9-B
Husky 829	
BUNTON COMPANY	
32-10BBS, 36-10BBS,	U1-9
39+10BBS	
53-10BBS, 53H-10BBS	
Lawn Larry 36	
	U1R-9
CARTER BROTHERS	
EZ-602, EZ-602C, EZ-702,	LB12A-A
EZ-702C	
CASE INTERNATIONAL	
107, 108, 108XC, 110, 110XC,	U1-9
116XC, 117, 118, 210, 220,	
222, 226, 442, 448,	
644, 646, 648, 80XC	
M80	
DEERE & CO.	
100, 108, 111, 112L, 116, 116H	U1-9
300, R72, R92, S82, S92	
DIXIE CHOPPER	
9018,5020,5024,8024	U1-9
E.T. RUGG CO	
5049-E2, 5049-E4,	U1-9
5069-E, 5088-E	
ECONOMY TRACTOR	
PK1212	U1R-9
FLOW-MOW MOWER COMPANY	
JETX 2668	U1-9
FORD MOTOR CO.	
LGT100, LGT120, LGT125,	U1-9
LGT145, LGT165, LT75,	
RV1T66	

Model	Battery Type
GARDEN WAY / TROY BUILT	
Pony (before 1996)	LB12A-A
Pony (After 1996)	LB9-B
Troy-Built Rototiller	U1-B
GENERAL APPLIANCE MFG. CO.	
All Electric Starters	U1-B
GENERAL POWER	
3-725-E7, 3-725-EB, 3-725-E9	12N12A-4A-1 *
WES725, WES725-FS	12N12A-4A-1 *
GILSON	
GT14, GT14E, GT14HE	U1-B
YT11E, YT11HE, YT12.5,	
YT12E	
GRAVLEY CORPORATION	
1132, 1138, IHDE-126, IHDE-130, IHSE-126	U1-B
408	U1R-B
HEILMAN ENTERPRISES	
11-76, 11-77, 11-78, 8-76, 8-77	U1-B
220, 440, 445, 550, 555	U1R-B
HUFFMAN MFG.CO. (HUFFY)	
H-270, H-360	LB12A-A
HULL INDUSTRIES	
TC30ER	LB16-B *
JACOBSEN/HOMELITE/HUSTLER	
42642, 43002, 43032, 43037	LB9-B
43043, Javelin MK11, RE-8E	LB9-B
53107, 53146, 53148, 53200, 53215, 53275, 53300, 53300	U1-B
GT12G, GT12H	
730-CLE, T-8	
JC PENNEY	
931-2703, 931-2737, 931-5730	U1-B
J. I. CASE	
M-80	12N12A-4A-1 *
KEES	
48/60	U1-B
KUBOTA	
B4200, B5100, B5200, B6100, B620, B7100	U1-B
G3300, G4200, G5200, G6200, Px2100	
LAWN BOY	
333, 335, 5802, 5803, 7259E 7259E, 7260E, 8227E, 8228E 8229E, 8229EA, 8233E 9303E, 9325ES, 9328E, 9328ES, 9365ES, 9368E, 9368ES	12N9-3A-1 *
	U1-B


Model	Battery Type
LAWN BOY	
9369ES (After 1975)	U1-S U1R-S
9329ES (After 1975)	
9369ES & 9329ES (Thru 1975)	
MINNEAPOLIS-MOLINE	
All Models	U1-S
MONTGOMERY WARD	
99 & Under Series	LB9-B
1300-1400 Series	U1-S
MORIDGE MFG., CO.	
1210, 1622, 1822	U1-S
MTD PRODUCTS	
300, 400, 500, 600 Series	LB14L-A2 +
385, 410, 412, 465, 485, 489, 497	
387, 397, 455, 485, 495, 497, 525, 667, 760	
500, 525, 526, 600, 698, 775, 795	U1-S
756 (395, 760 From 1981)	LB14L-A2 +
700-800 Series	LS0-N18L-A3 +
MURRAY OHIO MFG., CO.	
2523, 3033, 3035, 6-30502 6-30502XA, 6-30702, 6-30702XA 7-30502	LB14L-A2 +
NOMA	
321050... 321054, 328000... 328018 360100, 36101	LB14L-A2
POWER KING	
1212	U1-S
ROOF MFG., CO.	
492683, 493081, 493071	U1-S
ROOT MFG., CO.	
30-N7-3, 830-E, 30-NB-E	U1R-S
ROPER	
96444, 96527, 96941, K522, K852 L722, L72256R K9324AR, K932PRA, K9324AR K932PRA, L8000AT	LB9-B LB14L-A2
SEARS	
502-23365, 50223365, 502-2561128 502-256050, 502-256051 502-256050... 502-256053 502-256070, 502-256071 502-256080, 502-256081	U1R-S 12N14-3A2



Model	Battery Type
SEARS	
502.256120... 502.256126	
502.256130... 502.256132	
502.2561321, 502.2561576,	12N14-3A2+
502.2561576	U1R-9
502.256134, 502.256136A	
502.256138, 917.255260	12N14-3A2+
502.25617, 502.25619	U1R-9
502.255270... 917.255273	
502.255330, 917.255340	12N14-3A2+
502.256135, 502.25256136	
502.256137, 502.256140	
502.256141, 502.256142	LB16L-B+
131.96927, 131.969310	
131.96941, 131.96970	12N9-3A-1+
520.25800 (Thru 1996)	
520.25710 (Thru 1996)	
520.25538 (Thru 1996)	U1-9
536.250820... 536.250823	
536.25087	
536.250920... 536.250922	
536.255110, 536.255112	
536.255113, 536.255212	
536.255220, 536.255221	

Model	Battery Type
SEARS	
536.255230, 536.255232	
536.255240, 536.255250	
536.657020, 536.657040	
536.657060, 536.657080	
536.658080, 536.963100	
917.250740, 917.255120	12N9-3A-1.
917.25424, 917.25431 ...	
917.25435	
917.25474	U1R-8
917.255121, 917.259180	12N9-3A-1.
917.25541, 917.25558,	
917.25582	U1R-8
917.25592	12N9-3A-1.
SIMPLICITY	
3008, 3008-3, 99075	LB9-B
SNAPPER	
All Walk Behind Mowers (Electric Start)	LTXL4-BSEBX4L-B
YARD MAN INC.	
13420, 3730	12N9-3A-1.
Beetle	12N14-3A2.

Model	Battery Type
VOELLER, INC.	
SS-7	U1-9
WHEEL HORSE / TORO	
108-3, 108-6, 111-5 (1985)	
A85, A115 (1984)	LB14L-A2.
11-32, 11-38, 11-44	
57300, 57351, 57356, 57360	
7-25, TE10, TE12	
Grandmaster 117	U1-9
WHITE OUTDOOR PRODUCTS	
FST-16	
GT-185, -205, -1000	
LT-125, -155, -160, -165	L50-N18L-A3.
GT1000, R80, T100, T80,	
T800, T85	U1-9
WOODS	
1250, 1850	U1-9
SWISHER	
18Hp/32"	LB12A-A
TURFMASTER	
12/36, 12/39	U1-9



CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded	CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
KAWASAKI							ARCTIC CAT						
950	Mule 5210 Diesel	-10	-	-	-	-	1000	Prowler 1000	-13	MX30-3	LT30-3EB30-3	EBX30L-BS	*LB30L-B
750	Teryx All Models (US)	08-13	-	-	-	*U1-9	700	Wildcat 1000 LTD	13	MX30-3	LT30-3EB30-3	EBX30L-BS	*LB30L-B
	Teryx All Models (CN)	08-13	MX14-4	LT14-4 EB14-4	LTX14-BS EBX14-BS	-		Prowler 700	09	MX18-3	LT24-3 EB24-3	LTX24L-BS EBX24L-BS	*LB30L-B *LB30L-B
650	KAF650, Mule 4010 4x4	09	-	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	-	650	Prowler 700	10-13	MX30-3	LT30-3EB30-3	EBX30L-BS	*LB30L-B
620	Mule 4010 Trans4wd, Diesel	-13	-	-	-	*U1-9	550	Prowler 650	06-09	MX18-3	LT24-3 EB24-3	LTX24L-BS EBX24L-BS	*LB30L-B *LB30L-B
	KAF620F, Mule 4010 4x4 (US)	-13	-	-	-	*U1-9		Prowler 550	10-13	MX30-3	LT30-3EB30-3	EBX30L-BS	*LB30L-B
	KAF620F, Mule 4010 4x4 (CN)	-13	-	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	-		Prowler 550	-09	MX18-3	LT24-3 EB24-3	LTX24L-BS EBX24L-BS	*LB30L-B *LB30L-B
	Mule 4000 Classic	-13	-	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	*U1-9	POLARIS						
KAF620, Mule 3000, 3010, 3020	KAF620, Mule 500, 2510, 2620	-	-	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	-	900	Ranger RZR	11-14	MX30-3	LT30-3EB30-3	EBX30L-BS	-
				LT20-3 EB20-3	LTX20L-BS EBX20L-BS	-	800	Ranger RZR	09-13	MX20-3	-	EBX30L-BS	-
				LT16C-3	LT16CL-BS	*LB16CL-B	700	Ranger RZR 4,5	10-14	MX30-3	LT30-3EB30-3	EBX30L-BS	-
				LT16C-3	LT16CL-BS	*LB16CL-B		Ranger	10-13	MX30-3	LT30-3EB30-3	EBX30L-BS	*LB30L-B
540	KAF540, Mule 2010, 2030, 2030	-	-	LT16C-3	LT16CL-BS	*LB16CL-B	570	Ranger 8x6, 4x4	06-10	MX30-3	LT30-3EB30-3	EBX30L-BS	-
450	KAF450, Mule 1000	-	-	LT16C-3	LT16CL-BS	*LB16CL-B	570	Ranger 4x4	14	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14-B2
400	KAF400, Mule 600, 610	05-13	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A2	425	RZR570, EPS	12-13	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14-B2
360	Advantage Classic	03-07	-	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	-		Ranger 8x6, 4x4	11-13	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14-B2
300	KAF300, Mule 500, 520, 550	-	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A2	425	Ranger 8x6, 4x4	10-13	MX30-3	LT30-3EB30-3	EBX30L-BS	*LB30L-B
				LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A2		Ranger 2x4	02-03	MX30-3	LT30-3EB30-3	EBX30L-BS	*LB30L-B

- Please see battery supplier cross reference

555 UTILITY VEHICLE BATTERY APPLICATIONS

CC	Model	Year	MX	Factory Activated MF	Dry Charged MF	Flooded	CC	Model	Year	MX	Factory Activated MF	Dry Charged MF	Flooded
POLARIS							SUZUKI						
400	Ranger 400	11-14	MX15-4	LT14A-4	LTX14AH-BS	LB14-B2	620	QUAD50F	05	-	LT20-3	LTX20L-BS	-
170	Ranger RZR	-14	MX12-4	EB14A-4	EBX14AH-BS	-	KYMC0						
				LT12-4	LTX12-BS	-	500	UXV500	-13	-	LT20-3	LTX20L-BS	-
				EB12-4	EBX12-BS	-					EB20-3	EBX20L-BS	-
POLARIS													
	Rhino(All models)	ALL	-	-	-	-							

555 PERSONAL WATERCRAFT BATTERY APPLICATIONS

CC	Model	Year	Factory Activated MF	Dry Charged MF	High Performance	Conventional	CC	Model	Year	Factory Activated MF	Dry Charged MF	High Performance	Conventional
AQUA-JET CO.							KAWASAKI						
432	Aqua-Jet Sx1	89-90	EB16B-4	EB16B-BS	LB16-B	-	800	JS800 SX-R	03-01	LT20-3	LTX20L-BS	-	-
430	Aqua-Jet Sx1	91	EB16B-4	EB16B-BS	LB16-B	-				EB20-3	EBX20L-BS	-	-
ARCTIC CAT							750	JH750 SS, ST, XL, XLR	92-99	LT16C-3	LT16CL-BS	LB16CL-B	-
770	Tiger Shark	97-99	LT14A-3	LTX14AH-BS	LB14LA-2	-		JH750 ST, ZXI	95-97	LT20-3	LTX20L-BS	-	-
			EB14A-3	EBX14AH-BS	-	-				EB20-3	EBX20L-BS	-	-
640	Tiger Shark	97-99	LT14A-3	LTX14AH-BS	LB14LA-2	-		JS750 SX, ZX	92-95	LT16C-3	LT16CL-BS	LB16CL-B	-
			EB14A-3	EBX14AH-BS	-	-		JS750 SX1, SX1 PRO	95-02	LT20-3	LTX20L-BS	-	-
BOMBARDIER/SEA-DOO (BRP)										EB20-3	EBX20L-BS	-	-
1500	GTX, RXT	09	-	-	LB30CL-B	-		JT750 XLR, ST, STS	94-95	LT16C-3	LT16CL-BS	LB16CL-B	-
	GTX 4-Tec, RXP	03-05	-	-	LB30CL-B	-		JT750 STS, STX	96-98	LT20-3	LTX20L-BS	-	-
	All other Models	94-07	LT16C-3	LT16CL-BS	LB16CL-B	-				EB20-3	EBX20L-BS	-	-
	All Models	88-93	EB16B-3	EB16BL-BS	LB16L-B	-	650	JP650 X2	85-95	LT16C-3	LT16CL-BS	LB16CL-B	-
HONDA								JP650 TS	89-95	LT16C-3	LT16CL-BS	LB16CL-B	-
1470	Aqua Trax F-15, F-15X	03-09	LT20-3	LTX20L-BS	-	-		JP650 SC	91-95	LT16C-3	LT16CL-BS	LB16CL-B	-
			EB20-3	EBX20L-BS	-	-		JS650 SX	87-95	LT16C-3	LT16CL-BS	LB16CL-B	-
1235	Aqua Trax F-12, F-12X	02-09	LT20-3	LTX20L-BS	-	-	550	JS550, SX	86-95	LT16C-3	LT16CL-BS	LB16CL-B	-
			EB20-3	EBX20L-BS	-	-		JS550	82-85	EB16B-3	EB16BL-BS	LB16L-B	-
	Aqua Trax R-12, R-12X	02-09	LT20-3	LTX20L-BS	-	-	440	JS440	87-92	LT16C-3	LT16CL-BS	LB16CL-B	-
			EB20-3	EBX20L-BS	-	-		JS440	77-85	EB16B-3	EB16BL-BS	LB16L-B	-
KAWASAKI							400	JS400	76	EB16B-3	EB16BL-BS	LB16L-B	-
1500	JT1500-A, C, STX-15F	04-09	LT20-3	LTX20L-BS	-	-	300	JS300 TS, SK	85-91	LT16C-3	LT16CL-BS	LB16CL-B	-
			EB20-3	EBX20L-BS	-	-	YAMAHA						
	JT1500B, C, 250X Ultra LX	07-09	LT20-3	LTX20L-BS	-	-		All Waverunner Models	87-09	LT16C-3	LT16CL-BS	LB16CL-B	-
1200	JH1200-A, B Ultra 150	99-05	LT20-3	LTX20L-BS	-	-	POLARIS						
			EB20-3	EBX20L-BS	-	-		All Models	All	LT16C-3	LT16CL-BS	LB16CL-B	-
	JT1200-A, B, C, STX-R, STX-12F	02-07	LT20-3	LTX20L-BS	-	-	S.O.S. MARINE MFG						
1100	JH1100-B Ultra 130	01-04	LT20-3	LTX20L-BS	-	-		All Models	All	LT16C-3	LT16CL-BS	LB16CL-B	-
			EB20-3	EBX20L-BS	-	-	ULTRANAUTICS						
	Jh1100 ZXI	96-03	LT20-3	LTX20L-BS	-	-	800	Sea Flash	89-92	-	-	LB0A24AL-B	-
			EB20-3	EBX20L-BS	-	-		Wet Bike	87-92	-	-	LB0A24AL-B	-
	JT1100 STX	97-03	LT20-3	LTX20L-BS	-	-		Wet Bike	85-86	-	-	-	CHD-12
			EB20-3	EBX20L-BS	-	-		Jet Star 1250 (Boat)	88-99	-	-	LB0A24AL-B	-
900	JH900 ZXI	95-97	LT20-3	LTX20L-BS	-	-		Jet Star 1260 (Boat)	91	-	-	LB0A24AL-B	-
			EB20-3	EBX20L-BS	-	-	WET JET INTERNATIONAL						
	JT900 STS, STX	97-05	LT20-3	LTX20L-BS	-	-		All Models	All	EB16B-4	EB16B-BS	LB16-B	-

*MF=Maintenance Free


WHAT CAUSES A BATTERY TO FAIL PREMATURELY

SELF DISCHARGE

Antimony Batteries (Conventional 6-Volt and 12-Volt Standard)

Even when the motorcycle is not being used, these batteries discharge (SELF DISCHARGE) at the rate of approximately 0.5 to 1% per week period. The rate of discharge increases with warm temperatures. See the approximate rates of discharge shown in Figure 1 to the right.


Figure 1 Self Discharge - Temperature Comparison

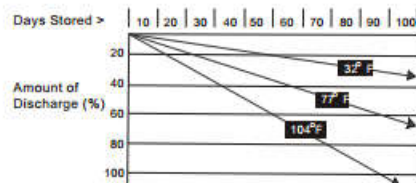

Lead Calcium Batteries (12-Volt Premium High Performance)

The lead/calcium technology motorcycle batteries have a longer life because they hold their charge more than three times as long as the conventional lead antimony batteries. These batteries discharge (SELF DISCHARGE) at a weekly rate of approximately .15 - .3%. See Figure 2 to the right. Some lead/calcium batteries also contain a special chemical that resists sulfation formation on the battery plates.

Figure 2 Self Discharge Rate Calcium vs. Antimony @ 77 °F

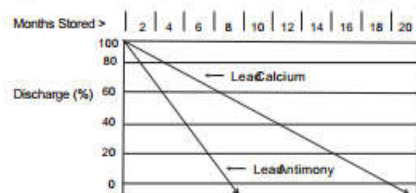

In order to minimize the self discharge of the battery, it is recommended that the battery be placed in a cool (NOT FREEZING) dry location when the motorcycle is not being used.

CURRENT DRAIN

Some big motorcycles (1,000 cc & up) have electric accessories such as clocks, GPS, radios, computer memory and alarm discharge the battery even when the ignition is turned off. The amperage drain of each motorcycle is different depending on the model, year and electric accessories.

Figure 3

The chart below shows how quickly the battery is discharged by BOTH self discharge and current drain.

Figure 3 Self Discharge

Approximate # of Days from 100% full Charged to 100% Discharged		
Temperature	Lead Antimony Battery	Lead Calcium Battery
100° F	100 Days	300 Days
77° F	200 Days	600 Days
32° F	550 Days	1,650 Days

Figure 4 Current Drain

Discharging Amperes	Days from 100% Charged to 50% Discharged	Days from 100% Charged to 100% Discharged
7 mA	60 Days	119 Days
10 mA	42 Days	83 Days
15 mA	28 Days	56 Days
20 mA	21 Days	42 Days
30 mA	14 Days	28 Days


Note: If the battery is less than 100% charged when the battery begins standing, the discharge period will be shorter than the time indicated above.

HOW TO PROLONG BATTERY LIFE

ANTI SULFATE is a chemical that can drastically reduce sulfate crystal build up on battery plate surfaces. This allows the battery to operate longer with optimum performance. All of our Premium, AGM and factory activated batteries have anti-sulfate added.


LOW SELF- DISCHARGE

Self discharge occurs when batteries slowly lose charge when not in service. With the use of special lead alloy grids, self discharge is minimal and the batteries maintain their state-of-charge.

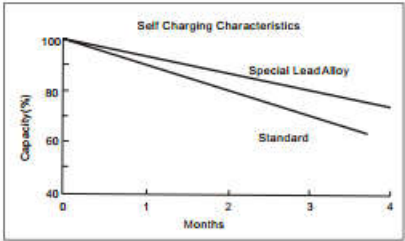

GREATER TERMINAL VOLTAGE


At lower, batteries can supply greater terminal voltage over a longer period of time than conventional batteries as shown below.

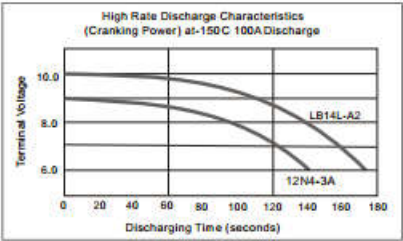

HOW TO DETERMINE BATTERY STATE-OF-CHARGE

To check the battery's state-of-charge you can use one of three methods: 1.) syringe hydrometer 2.) voltmeter or 3.) 5-Ball Hydrometer. See the table below for a comparison between 3 methods to determine the accurate state-of-charge.

State-of-Charge	Syringe Hydrometer	Digital Voltmeter	5-Ball Hydrometer
100% Charged With Anti-Sulfate Additive	1,280 Sp. Gr.	12.80 Volts	5- Balls Floating
100% Charged	1,265 Sp. Gr.	12.60 Volts	4- Balls Floating
75% Charged	1,210 Sp. Gr.	12.40 Volts	3- Balls Floating
50% Charged	1,160 Sp. Gr.	12.10 Volts	2- Balls Floating
25% Charged	1,129 Sp. Gr.	11.90 Volts	1- Balls Floating
00% Charged	Less than 1,100 Sp. Gr.	Less than 11.80 Volts	0- Balls Floating



Note: Results based on a typical battery.

HOW TO STOP ELECTROLYTE FROM FREEZING

Batteries that are fully charged CAN NOT FREEZE. If a battery becomes discharged, the electrolyte can freeze if it is stored below +20 °F. To prevent damage due to freezing, do not allow the battery to become discharged.

The chart below shows temperatures at which electrolyte at various states of charge begin to freeze. These are the approximate temperatures at which ice crystals begin to form. The electrolyte does not freeze solid until a lower temperature is reached. Solid freezing of electrolyte in a discharge battery will damage the battery plates and may crack the battery case. A battery in which the electrolyte has been frozen will not recover to full power and must be replaced.

Specific Gravity of Electrolyte	Battery Voltage		Freezing Temperatures
	12-Volt	6-Volt	
1,280 Sp. Gr.	12.78V	6.39V	-92 °F
1,265 Sp. Gr.	12.66V	6.33V	-71 °F
1,250 Sp. Gr.	12.57V	6.28V	-62 °F
1,200 Sp. Gr.	12.27V	6.13V	-16 °F
1,150 Sp. Gr.	11.97V	5.98V	5 °F
1,100 Sp. Gr.	11.67V	5.84V	18 °F

Note: Results based on a typical battery.

A Battery that is at a 75% state of charge or greater is in no danger of freezing. We recommend that you check your battery voltage every 30 days during the winter.

REASONABLE PRICE
RELIABLE QUALITY
TIMELY DELIVERY
FRIENDLY SERVICE

